



## AS0860-40/45 800 MHz TO 6 GHz 40/45 WATT DUAL BAND POWER AMPLIFIER



This innovative amplifier combines a compact design with market leading performance. Its ability to operate into any load without fold back makes this an ideal amplifier for all EMC RF immunity testing. The amplifier is supported via Milmega's unique five year parts, labour and shipping warranty and Teseq's local service network.

The amplifier is designed ready for a simple upgrade to higher power levels by the addition of extra power modules into the existing mainframe. If more power is required once fully loaded the unit can be integrated with further additional units to achieve power levels up to 150 watts.

- Upgradeable to higher power
- High reliability GaN transistor technology
- Mismatch tolerant and unconditionally stable
- Wide instantaneous bandwidth
- Unique five year parts, labour and shipping warranty
- Integral directional coupler
- RS232, USB and ethernet or RS232 and GPIB


A selection of remote interfaces are available and the user can select, at time of ordering, either the internal RS232, USB and ethernet or the external RS232 and GPIB unit housed in a 1U module at no additional cost.

Internal RF switches, operated either manually via the front panel or by one of the selected remote interfaces, switch input, output and the forward and reverse sample ports for seamless operation across the wide 1 to 4 GHz range.

The GaN balanced pair design at the core of the amplifier ensures a high reliability, linear performance across the frequency range. This design also ensures that the amplifier will continue to operate at full power even when presented with an open or short circuit at its output.

The unit is powered from a switched mode power supply for high efficiency, high power factor and wide voltage range operation. The unit is air-cooled with integral fans, and is protected against faulty cooling by excess temperature sensing. A safety interlock connector is provided, which the user can short circuit to ground, to put the amplifier into standby mode. Front panel indicators are provided to indicate over-temperature and RF interlock condition.

### Measured data

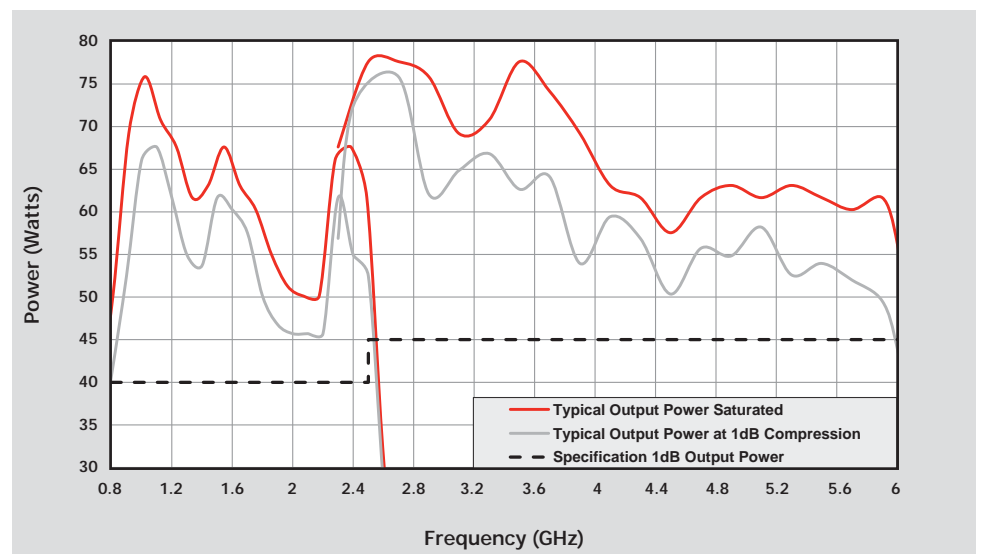

# AS0860-40/45

## 800 MHz TO 6 GHz 40/45 WATT DUAL BAND POWER AMPLIFIER

### Key RF Parameters

Frequency range (instantaneous)	0.8 to 6 GHz	
Sub ranges	0.8 to 2.5 GHz	2.5 to 6 GHz
Rated output power	44.7 W minimum	50 W minimum
Power at 1 dB gain compression (P1dB)	40 W minimum	45 W minimum
Harmonics at P1dB	-20 dBc typical	
Gain	42 dB	42.5 dB
Gain variation with frequency	+/-2.5 dB	+/-3 dB
Maximum input power (no damage)	15 dBm	

### Impedance / VSWR

Output VSWR tolerance	Infinite any phase
Stability	Unconditional
Output impedance	50 Ohm
Output VSWR	2:1 typical
Input VSWR	2:1 max

### Additional RF Data

Third order intercept point IP3	10 dB > P1dB	
Spurious	-70 dBc max (-80 dBc typical)	
Noise figure	6 dB	8 dB
RF connector style	Type N female	

### Electrical and Interfaces

Remote control	Internal RS232, USB and ethernet or RS232 and GPIB in additional external 1U high unit
Safety interlock	Rear panel mounted BR2-female
Supply voltage (single phase)	85 to 264 VAC
Supply frequency	50 to 60 Hz
Supply power	<0.5 kVA

#### MILMEGA

Park Road, Ryde, Isle of Wight, PO33 2BE, UK  
 T +44 (0) 1983 618004 F +44 (0) 1983 811521  
 sales@milmega.co.uk [www.milmega.co.uk](http://www.milmega.co.uk)  
[www.teseq.com](http://www.teseq.com)

© November 2013 MILMEGA  
 Specifications subject to change without notice.  
 Teseq® is an ISO-registered company. Its products  
 are designed and manufactured under the strict  
 quality and environmental requirements of the ISO  
 9001. This document has been carefully checked.  
 However, Teseq® does not assume any liability for  
 errors or inaccuracies.

### Physical / Environmental

Case dimensions	19 inch, 6U case, 527 mm deep
Mass	40 kg
Operating temperature range	0 to 40° C (storage -40 to 70° C)