



AS0860-150/90 800 MHz TO 6 GHz 150/90 WATT DUAL BAND POWER AMPLIFIER



- High reliability GaN transistor technology
- Mismatch tolerant and unconditionally stable
- Wide instantaneous bandwidth
- Unique five year parts, labour and shipping warranty
- Integral directional coupler
- RS232, USB and ethernet or RS232 and GPIB

This innovative amplifier combines a compact design with market leading performance. Its ability to operate into any load without fold back makes this an ideal amplifier for all EMC RF immunity testing. The amplifier is supported via Milmega's unique five year parts, labour and shipping warranty and Teseq's local service network.

Designed specifically for radiated EMC testing, this mismatch tolerant amplifier delivers power continuously into the poor and variable match typically associated with EMC antenna.


A selection of remote interfaces are available and the user can select, at time of ordering, either the internal RS232, USB and ethernet or the external RS232 and GPIB unit housed in a 1U module at no additional cost.

Internal RF switches, operated either manually via the front panel or by one of the selected remote interfaces, switch input, output and the forward and reverse sample ports for seamless operation across the wide 1 to 4 GHz range.

The GaN balanced pair design at the core of the amplifier ensures a high reliability, linear performance across the frequency range. This design also ensures that the amplifier will continue to operate at full power even when presented with an open or short circuit at its output.

The unit is powered from a switched mode power supply for high efficiency, high power factor and wide voltage range operation. The unit is air-cooled with integral fans, and is protected against faulty cooling by excess temperature sensing. A safety interlock connector is provided, which the user can short circuit to ground, to put the amplifier into standby mode. Front panel indicators are provided to indicate over-temperature and RF interlock condition.

Measured data

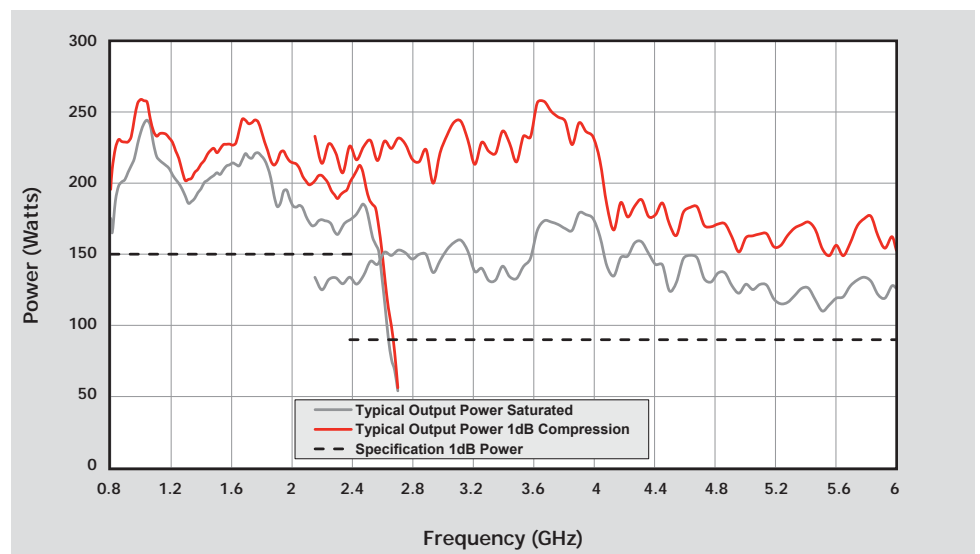

AS0860-150/90

800 MHz TO 6 GHz 150/90 WATT DUAL BAND POWER AMPLIFIER

Key RF Parameters

Frequency range (instantaneous)	0.8 to 6 GHz	
Sub ranges	0.8 to 2.5 GHz	2.5 to 6 GHz
Rated output power	175 W minimum	125 W minimum
Power at 1dB gain compression (P1dB)	150 W minimum	90 W minimum
Harmonics at P1dB	-20 dBc typical	
Gain	47.8 dB	45.6 dB
Gain variation with frequency	+/-2.5 dB	+/-3 dB
Maximum input power (no damage)	15 dBm	

Impedance / VSWR

Output VSWR tolerance	Infinite any phase
Stability	Unconditional
Output impedance	50 Ohm
Output VSWR	2:1 typical
Input VSWR	2:1 max

Additional RF Data

Third order intercept point IP3	10 dB > P1dB	
Spurious	-70 dBc max (-80 dBc typical)	
Noise figure	6 dB	8 dB
RF connector style	Type N female	

Electrical and Interfaces

Remote control	Internal RS232, USB and ethernet or RS232 and GPIB in additional external 1U high unit
Safety interlock	Rear panel mounted BR2-female
Supply voltage (single or three phase)	90 to 132 or 180 to 240 VAC +/-10%
Supply frequency	50 to 60 Hz
Supply power	<2 kVA

MILMEGA

Park Road, Ryde, Isle of Wight, PO33 2BE, UK
 T +44 (0) 1983 618004 F +44 (0) 1983 811521
 sales@milmega.co.uk www.milmega.co.uk
www.teseq.com

© November 2013 MILMEGA
 Specifications subject to change without notice.
 Teseq® is an ISO-registered company. Its products
 are designed and manufactured under the strict
 quality and environmental requirements of the ISO
 9001. This document has been carefully checked.
 However, Teseq® does not assume any liability for
 errors or inaccuracies.

Physical / Environmental

Case dimensions	19 inch, 12U case, 527 mm deep
Mass	130 kg
Operating temperature range	0 to 40° C (storage -40 to 70° C)