
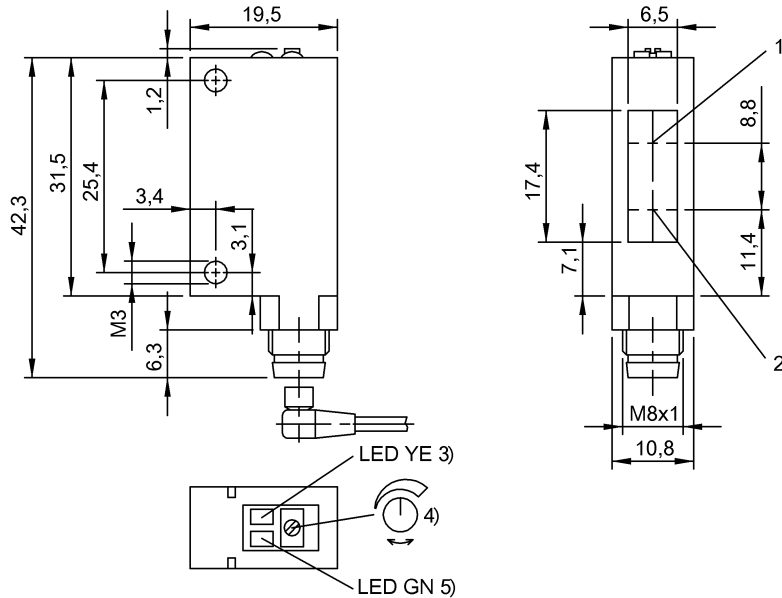


**BOS 5K-PS-RR10-S75**  
**Ordering code: BOS012E**

Retroreflective sensor  
 Series 5K  
 Working Range: 0...4 m

PNP (1x), NO (pin 4)  
 LED, red light  
 DC, direct current

**BALLUFF**  
*sensors worldwide*



1) Optical axis receiver, 2) Optical axis emitter, 3) Output function, 4) Sn, 5) Stability

**Characteristic data**

Operating voltage	10...30 V DC
Connection	Connector, M8x1-S75
Switching freq. f max.	500 Hz
Indicator	Stability - LED GN
Setting	Sensitivity (Sn)
Adjuster	Potentiometer 270° (1x)
Reference reflector	BOS R-1
Short-circuit protected	yes
Protected against polarity reversal	yes
Degree of protection as per IEC 60529	IP67

**Optical data**

Principle of optical operation	Retro-reflective sensor
Switching function, optical	NO: dark-on
Light type	LED, red light
Wavelength	660 nm
Ambient light max.	5,000 Lux
Polarising filter	yes

**Electrical data**

Rated operating voltage Ue DC	24 V
Effective operating current Ie	100 mA
Ripple max. (% of Ue)	8
Switching output	PNP (1x)
Switching function	NO (pin 4)
Turn-off delay toff max.	1 ms

Turn-on delay ton max.	1 ms
No-load current max. Io at Ue	30 mA
Voltage drop Ud max. (at Ie)	1,2 V

**Mechanical data**

Connector type	M8x1-S75
Eff. switching distance Sr	4000 mm
Ambient temperature	-25...55 °C
Sensing surface material	PMMA
Housing material	PC, PBT
Mounting type	Screw M3
Design	Block, 90° connection
Operating range Ro	0...4 m
Range Sn	Sn = 4 m, adjustable

**Basic data**

Basic standard IEC 60947-5-2  
 The sensor is functional again after the overload has been eliminated.  
 Polarizing filters prevent spurious switching due to reflecting and shiny parts.  
 Operating object (test target): Gray card, 200 x 200, 90 % remission, lateral approach, direction of movement vertical to plane of lens axes.  
 Only for NFPA 79 applications (machines with a supply voltage of maximum 600 volts). Device shall be connected only by using any R/C (CYJV2) cord, having suitable ratings.  
 For additional information, refer to user's guide.  
 Order accessories separately.

**BOS 5K-PS-RR10-S75**  
**Ordering code: BOS012E**

Retroreflective sensor  
Series 5K  
Working Range: 0...4 m

PNP (1x), NO (pin 4)  
LED, red light  
DC, direct current

**BALLUFF**  
*sensors worldwide*



Definitions see main catalog

subject to change

