

## Ice and water dispenser up to 209 kg



Shown with optional KLP24A legs



### Features

**Smarter Construction** - Durable stainless steel evaporator and exterior panels. Greaseless bearings for reduced maintenance. Larger sink opening and dispensing area. Antimicrobial AquaArmor with AgION is molded into key components.

**Space maximizing design** - The industry's smallest operational footprint relative to capacity. Featuring specially designed contoured sides for enhanced breathability and an external air filter.

**More convenient front access** - Removable front panels allow ease of access and service to all key internal components. Including removable storage bin for better cleaning and maintenance access.






**Enhanced service features** - Intuitive LED diagnostic lights reduce service time. Unit specific QR code for quick access to service manuals and warranty history. Convenient USB drive that allows for fast software updates. New removable sink and grill provide maximum access for ease of cleaning.

**Energy and Water Efficiency** - Industry leading efficiencies deliver on going savings.

**Quieter operation** - Improved condenser fan function.

### Technologies



				
	+C° -C°	21°C : 10°C [kg] [lb]	32°C : 21°C [kg] [lb]	[kg] [lb]
HID 540 AS		209 460	152 335	18 40

		 [WxDxH mm] 542 x 619 x 1038 [WxDxH inches] 21.36" x 24.38" x 40.88"
[V/Hz/ph] 220-240/50/1	R404A	

This product qualifies for the following listings:



Chewable, slow-melting ice that allows for more reliable dispensing.

19 mm x 8 mm x 9,5 mm  
(3/4" x 5/16" x 3/8")


**2** Years Warranty

Subject to certain limitations and exclusions

Certified ISO 9001:2008

[www.scotsman-ice.it](http://www.scotsman-ice.it)  
[www.scotsman-ice.com](http://www.scotsman-ice.com)

## Ice and water dispenser up to 209 kg

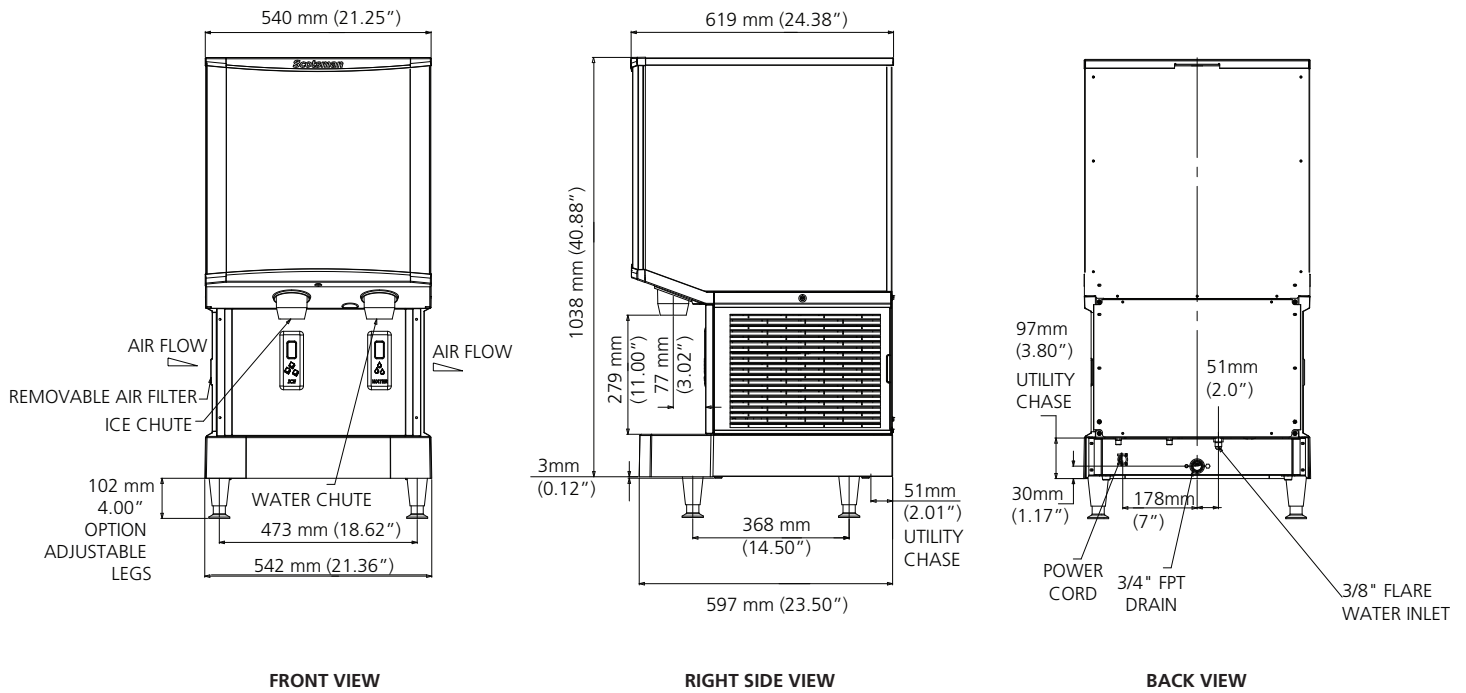

All models include 7.5' power cord with NEMA 5-15P plug

Installation Note: Allow 6" space at left, back and right side for ventilation and utility connections.

Minimum		Maximum
10°C (50°F)		38°C (100°F)
5°C (40°F)		38°C (95°F)
-10%		+10%
1,4 bar 20 psi		5,5 bar 80 psi

					FUSE				
	[C°] [F°]	[Btu/h] [W]	[Ømm²]	[W]		100 kg [kWh] - 100 kg	[l/h]	32°C 90°F 21°C 70°F [gal/h]	[kg] [lb]
HID 540 AS		6800 1992	3 x 1,5	800	15 A	12,6	6,4	1,7	98 215

**IMPORTANT NOTICE:**  
 Models and specifications are subject to change without notice.  
 This spec sheet is meant for commercial purpose only.  
 For technical documentation please refer to our service manuals.

[www.scotsman-ice.it](http://www.scotsman-ice.it)  
[www.scotsman-ice.com](http://www.scotsman-ice.com)