


# PP black backing ring ANSI

UV-RESISTANT

Backing ring ANSI  
ASME B16.5 class 150  
steel insert  
flange connection  
injection moulded  
PP-FRP black

**Advantages:**

- UV-resistant
- High life expectancy
- Corrosion-resistant

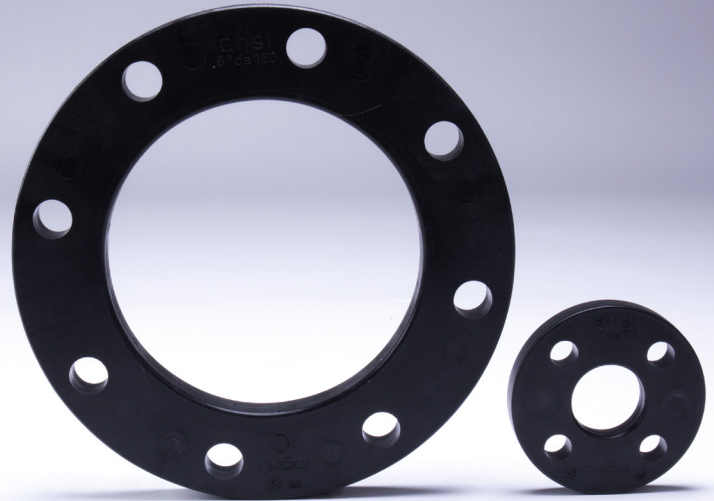

**SUPPLY RANGE backing ring ANSI PP-GFK black**

| dimension | code           | detail                   |
|-----------|----------------|--------------------------|
| 20        | 14.013.0020.11 | 20-1/2" - MOP 16 bar     |
| 25        | 14.013.0025.11 | 25-3/4" - MOP 16 bar     |
| 32        | 14.013.0032.11 | 32-1" - MOP 16 bar       |
| 40        | 14.013.0040.11 | 40-1 1/4" - MOP 16 bar   |
| 50        | 14.013.0050.11 | 50-1 1/2" - MOP 16 bar   |
| 63        | 14.013.0063.11 | 63-2" - MOP 16 bar       |
| 75        | 14.013.0075.11 | 75-2 1/2" - MOP 16 bar   |
| 90        | 14.013.0090.11 | 90-3" - MOP 16 bar       |
| 110/125   | 14.013.0110.11 | 110/125-4" - MOP 16 bar  |
| 160       | 14.013.0160.11 | 160-6" - MOP 16 bar      |
| 200/225   | 14.013.0200.11 | 200/225-8" - MOP 16 bar  |
| 250/280   | 14.013.0250.11 | 250/280-10" - MOP 16 bar |
| 315       | 14.013.0315.11 | 315-12" - MOP 16 bar     |

