


PERFORMANCE

Model	Maximum flow rate			Maximum head	
	l/min	cu.m/hr	gall/min	metres	feet
B40	267	16	58	24	78

Maximum power absorbed 3.1kW at 2000rpm

DIMENSIONS IN MM (APPROX.)

WEIGHT: 13kg

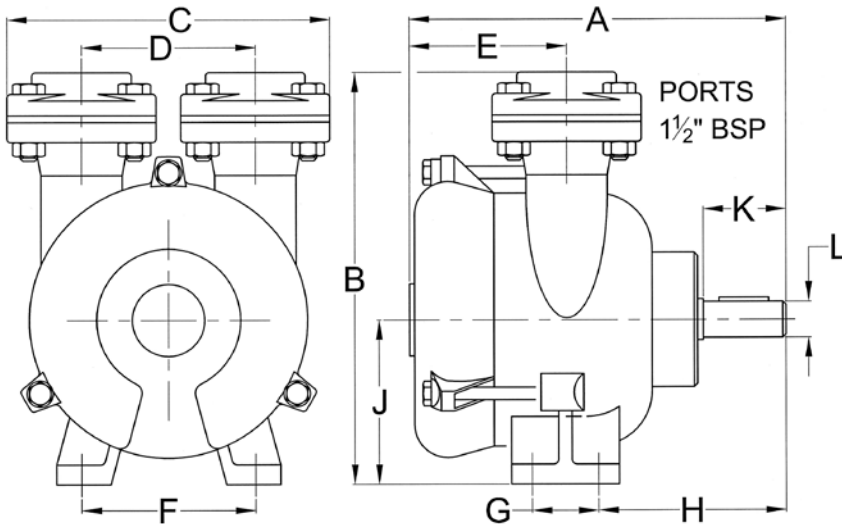

A	B	C	D	E	F	G	H	J	K	L
228	250	195	105	95	105	40	114	100	50	Ø22

MATERIALS OF CONSTRUCTION

Pump casing	bronze
Impeller	bronze
Port counterflanges	Bronze
Shaft	stainless steel AISI316
Pump head bolts	stainless steel
O-ring static seal	nitrile rubber

Pump performance and specification are subject to alteration without notice


AVAILABLE 'A' series CLUTCHES *(ask for a data sheet)*

Clutch Type	Pulley Pitch Dia	Pulley Belt Section	No of Belts	FP Code
MANUAL	117mm	B	1	FP-94-8030611
MANUAL	140mm	B	1	FP-94-8050611
24v dc	152mm	SPB	1	FP-94-8110427
24v dc	145mm	A	1	FP-94-8130427

FP PUMPS

B40

1½" BRONZE SELF-PRIMING-SIDE CHANNEL PUMP

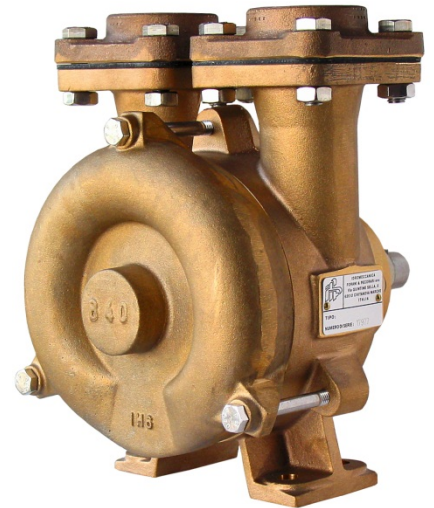

- * reliable continuous duty pump
- * corrosion-resistant bronze, with stainless steel shaft
- * self-priming up to 4m
- * bi-directional, flow can be reversed
- * carbon-ceramic mechanical shaft seal

BRONZE PUMPS

for

SEAWATER

Xylem Water Solutions UK Ltd
Bingley Road
Hoddesdon
Hertfordshire • EN11 0BU • UK

Tel: +44 (0)1462 480380
Fax: +44 (0)1462 482422
mail@cleghorn.co.uk
www.jabscoshop.com

xylem
Let's Solve Water