




These controllers provide manual control of the rotational speed of voltage controllable (230 VAC, 50 Hz) motors by varying the supplied voltage through phase angle control. They are suitable for inset as well as for surface mounting. The splash-proof housing allows use in demanding (moist) environments. An orange LED indicates the operation status. Several motors can be connected as long as the current limit is not exceeded. All models have an extra (not regulated) 230 VAC output / input. These speed controllers offer an excellent and accurate regulation.


Key features

- Infinitely variable speed control
- Built-in temperature cut-off fuse
- Regulation from minimum to maximum speed (LTY) and from maximum to minimum speed (LTX)
- Minimum speed adjustable by internal trimmer
- Fuse 5*20 mm, spare fuse included
- Orange operating LED indication

Technical specifications

Supply	230 VAC ± 10 % / 50 Hz	
Regulated output	80—230 VAC	
Min. speed adjustment	80—180 VAC	
Unregulated output	230 VAC / max. 2 A	
Protection standard	IP44 / IP54 (according to EN 60529)	
Ambient conditions	Temperature	0—35 °C
	Rel. humidity	< 100 % rH (non-condensing)

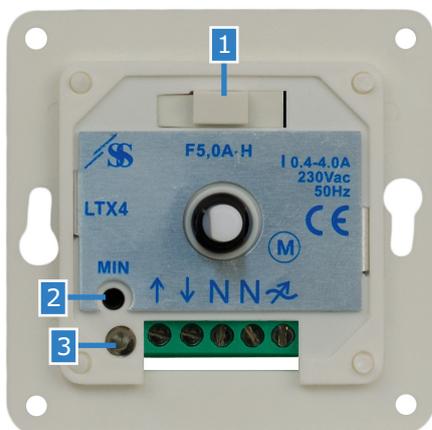
Settings

1 - Fuse holder		with a spare fuse
2 - Minimum speed adjustment trimmer		Adjusts the min. speed (factory preset 100 VAC)
3 - Operating LED indication	Continuous orange	Normal operation

Wiring and connections

↑	Power supply (230 VAC ± 10 % / 50 Hz)
↓	Unregulated output voltage 230 VAC / max. 2 A
N	Neutral
	Regulated output to motor
Connections	Cable cross section: max. 2,5 mm ²

Article codes

OUTPUT REGULATION FROM MINIMUM TO MAXIMUM		
	Rated current range, [A]	Fuse (5*20 mm), [A]
LTY-0-05-AT	0,05—0,5	F-0,63 A-H
LTY-0-15-AT	0,1—1,5	F-2,00 A-H
LTY-0-25-AT	0,2—2,5	F-3,15 A-H
LTY-0-40-AT	0,4—4,0	F-5,00 A-H
OUTPUT REGULATION FROM MAXIMUM TO MINIMUM		
	Rated current range, [A]	Fuse (5*20 mm), [A]
LTX-0-05-AT	0,05—0,5	F-0,63 A-H
LTX-0-15-AT	0,1—1,5	F-2,00 A-H
LTX-0-25-AT	0,2—2,5	F-3,15 A-H
LTX-0-40-AT	0,4—4,0	F-5,00 A-H


Area of use

- Manual control of the motor / fan speed in HVAC applications
- For indoor use only

Standards

- Low Voltage Directive 2014/35/EC
- EMC Directive 2014/30/EC
- WEEE Directive 2012/19/EU
- RoHs Directive 2011/65/EU




Packaging


Article	Packaging	Length [mm]	Width [mm]	Height [mm]	Net weight	Gross weight
LTX-0-05-AT LTY-0-05-AT	Unit (1 pc.)	95	85	70	0,16 kg	0,19 kg
	Carton (10 pcs.)	492	182	84	1,55 kg	1,99 kg
	Box (120 pcs.)	590	380	505	18,60 kg	25,00 kg
LTX-0-15-AT LTY-0-15-AT LTX-0-25-AT LTY-0-25-AT	Unit (1 pc.)	95	85	70	0,16 kg	0,19 kg
	Carton (10 pcs.)	492	182	84	1,63 kg	2,01 kg
	Box (120 pcs.)	590	380	505	19,56 kg	25,34 kg
LTX-0-40-AT LTY-0-40-AT	Unit (1 pc.)	95	85	70	0,24 kg	0,26 kg
	Carton (10 pcs.)	492	182	84	2,37 kg	2,77 kg
	Box (120 pcs.)	590	380	505	28,44 kg	34,55 kg

Fixing and dimensions
