

PL-3.5-2C/PL-4.0-2C

TWO POST LIFT WITH FLOOR PLATE

FEATURES



- Manual release from two sides, double insurance self-locking protection device, safe and easy to operate.
- Elegant appearance with hidden cable and pipeline.
- Equalization of two steel cables force both sliding blocks to move synchronously, effectively prevent the vehicle from tilting
- Minimum height of the lifting pad is 110mm, easily lift and suitable for low profile cars and SUV.
- Equip aluminum motor and car door-opening protection as standard configuration.
- Reliable oil cylinder, adopts chrome-plating honed cylinder and piston rod, with Italian seals on hydraulic rams ,ensure long service life
- Passed 115% dynamic test and 150% static test

CE



INFORMATION

PULL www.chinapull.com

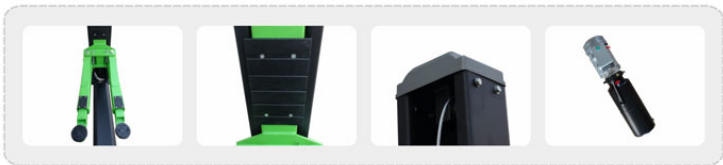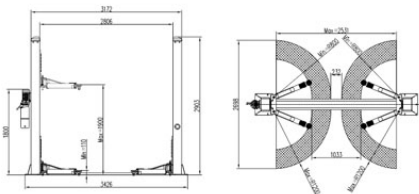

TECHNICAL SPECIFICATION

Model	Feature	Lifting capacity kg(lb)	Max lifting Height mm(-)	Machine Height mm(-)	Machine Width mm(-)	Rise time (s)	Drop time (s)	Power of motor (kw)	Power supply (V)
PL-3.5-2C	Manual release	3500(7716)	1900(74.8)	2903(114.3)	3426(134.9)	50	22	2.2	220V/380V 1/3 PHASE
PL-4.0-2C	Manual release	4000(8840)	1900(74.8)	2903(114.3)	3426(134.9)	55	25	2.2	220V/380V 1/3 PHASE