


# Concrete pump


Output up to 31 m<sup>3</sup>/h  
Delivery pressure up to 75 bar

## BSA 1002 -D BSA 1002 -E BSA 1003 -D

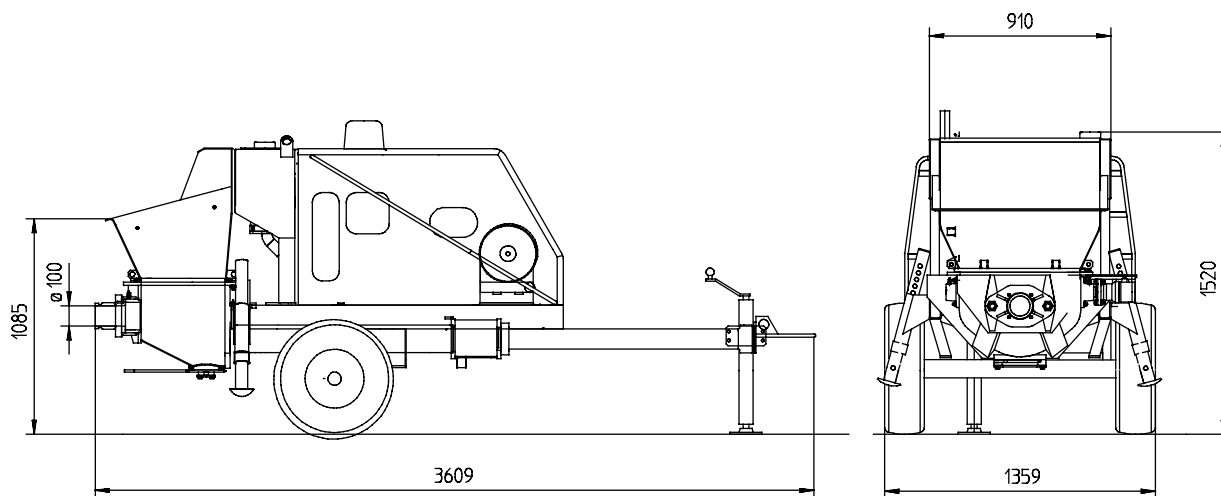

Note: Standard version. Dimensions and weights depend on equipment.

### Performance diagram

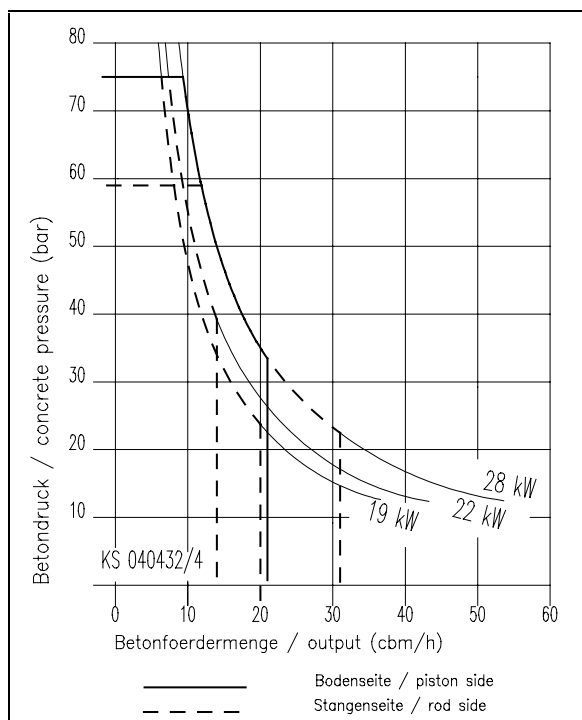

### Technical data for concrete pump

Model	BSA	1002 -D	1002 -E **	1003 -D
Material number		100714.005	100715.004	100816.000
Output	m <sup>3</sup> /h	20	14	31 / 21 *
Delivery pressure	bar	75		59 / 75 *
Delivery cylinder	Ø mm	120		150
Delivery cyl. stroke	mm	1000		
Strokes / minute		29	21	30 / 21 *
Engine / motor power	kW	19	22 **	28
Hopper Capacity	l	TS 300 approx. 230		
Hopper Filling height	m	approx. 1.1		
Transfer tube		S 1210		
Pressure connection		4.5"		
Control system		fully hydraulic (VHS-L)		
Weight	kg	1350		1500


\* Values for hydraulic fluid being fed to piston-side.

\*\* Electric motor with 50 Hz.

All data maximum theoretical.

Alterations due to technical progress reserved.  
Please see quotation for exact serial delivery scope.

## Hopper with transfer tube

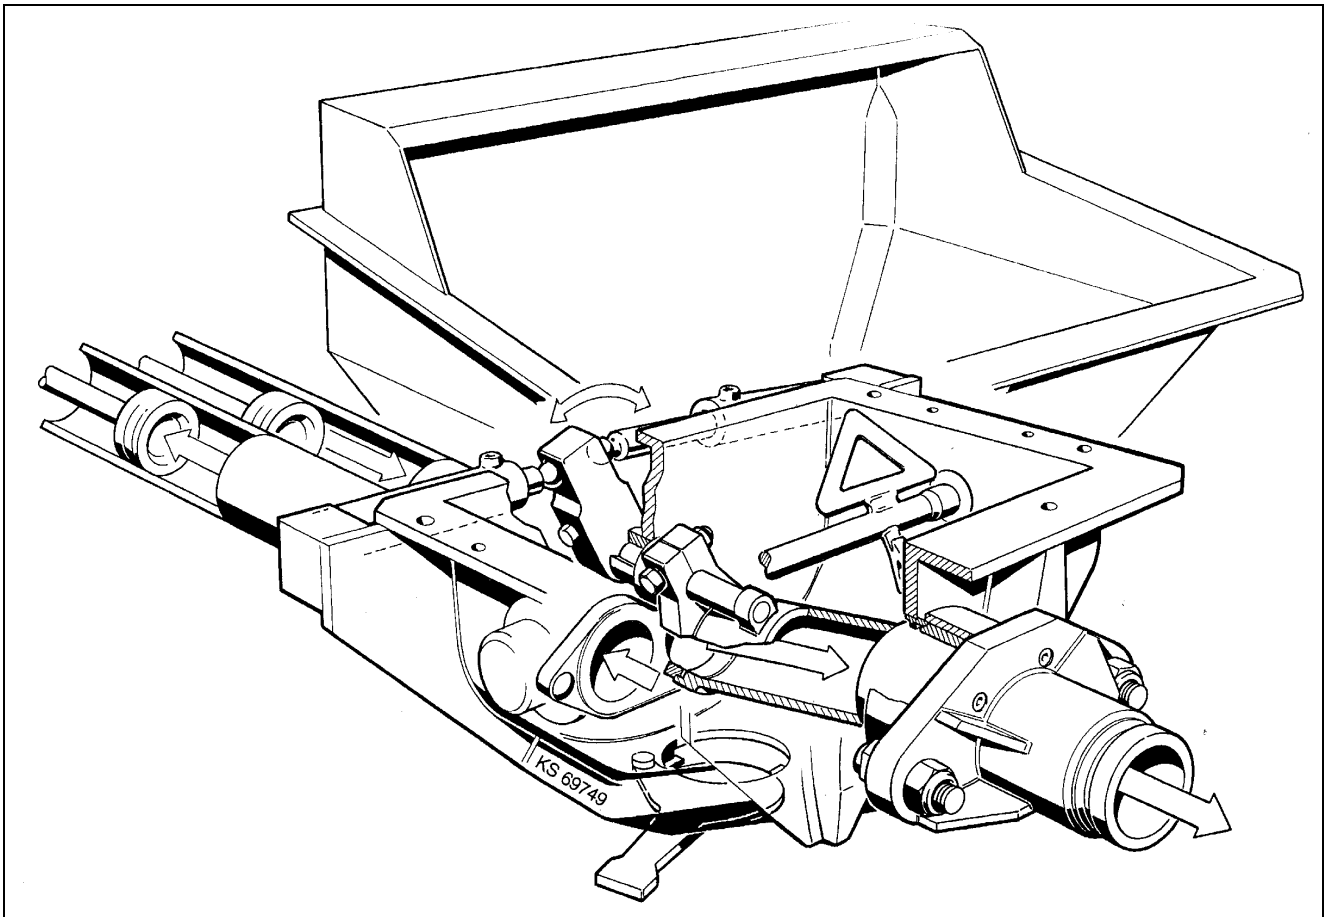

### Delivery scope

- central lubrication strip hopper
- cleaning accessories
- concrete hopper with agitator
- coupling ring (DIN)
- drive Diesel, Deutz 19 KW (BSA 1002 -D)
- drive electric 22 KW BSA 1002 -E)
- drive Diesel, Deutz 28 KW (BSA 1003 -D)
- grill 30 mm
- operating manuals 2x cert. and spare part lists
- painting: MB 1227 chrome yellow
- set of tools
- support legs 3x mechan.
- trailer F 8, can be driven on job site

### Optional extras

On request