


Harmony[®] XALD, XALK plastic control stations

For Harmony XB5, control and signaling
units Ø 22

Catalog
April 2019

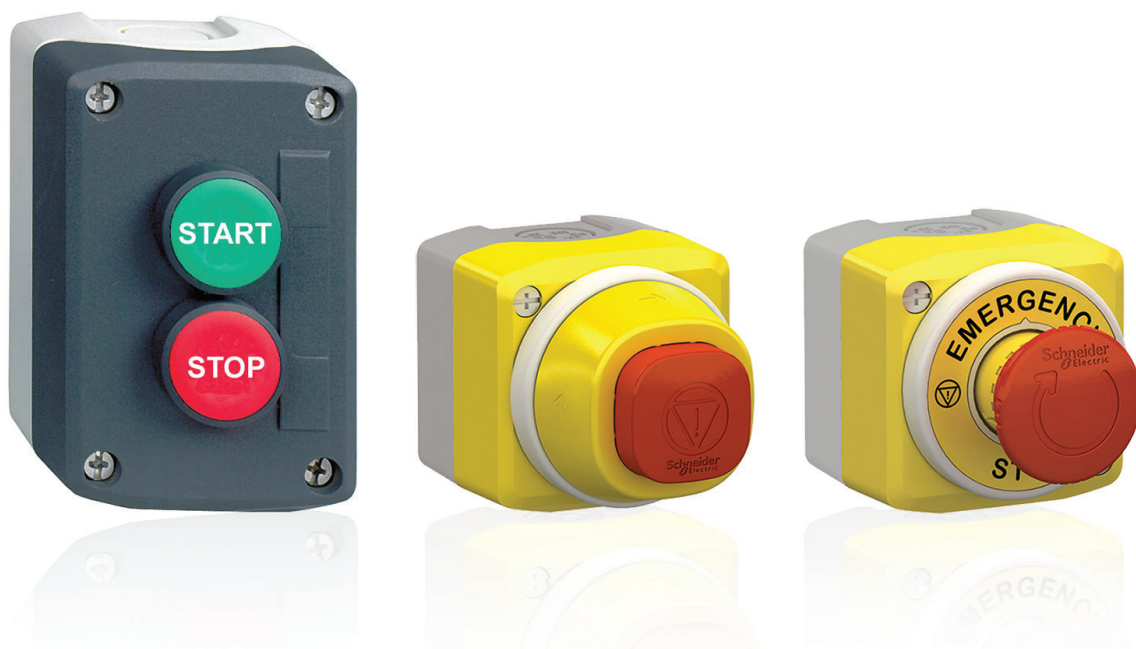

Quick access to product information

Get technical information about your product

References

Modicon M221 and M221 Book logic controllers
Modicon M221 logic controllers

| References | Number of Logic inputs | Logic outputs | Analog inputs | Integrated communication ports (2) (RTS) (RJ 45) | Reference | Weight (kg) |
|--------------------------|------------------------|------------------|---------------------|--|-----------|-------------|
| 150-240 V ~ power supply | 24 contacts | 7 relay outputs | 2 x 0...10 V inputs | 1 | TM221C16R | 0.345 |
| 150-240 V ~ power supply | 24 contacts | 7 relay outputs | 2 x 0...10 V inputs | 1 | TM221C16R | 0.345 |
| 24 V DC power supply | 24 contacts | 10 relay outputs | 2 x 0...10 V inputs | 1 | TM221C16R | 0.345 |
| 24 V DC power supply | 24 contacts | 10 relay outputs | 2 x 0...10 V inputs | 1 | TM221C16R | 0.345 |
| 24 V DC power supply | 24 contacts | 10 relay outputs | 2 x 0...10 V inputs | 1 | TM221C16R | 0.345 |
| 24 V DC power supply | 24 contacts | 10 relay outputs | 2 x 0...10 V inputs | 1 | TM221C16R | 0.345 |

TM221C16R
controller M221 16 IO relay

Download your TM221C16R datasheet

Change your selection

Discover other products & accessories

Discover your Schneider Electric tools

Characteristics | Dimensions Drawings | Mounting and Clearance | Connections and Schema | Performance Curves | Documents & Downloads

Main

- Range of product: Modicon M221
- Product or component type: Logic controller
- [Ih] rated supply voltage: 100...240 V AC
- Discrete input number: 9 discrete input conforming to IEC 61131-2 Type 1
- Analogue input number: 2 at input range: 0...10 V
- Discrete output type: Relay normally open
- Discrete output number: 7 relay
- Discrete output voltage: 5...125 V DC
5...250 V AC
- Discrete output current: 2 A

Each commercial reference presented in this catalog contains a hyperlink. Click on it to obtain the technical information of the product:

- > Characteristics, Dimensions and drawings, Mounting and clearance, Connections and schemas, Performance curves
- > Product image, Instruction sheet, User guide, Product certifications, End of life manual

Find your catalog



- > With just 3 clicks, you can reach the Industrial Automation and Control catalogs, in both English and French.
- > Download Digi-Cat with this [link](#)

General Catalog

- Pushbuttons, Switches, P&ID Lamps & Joysticks
- Boxes, Casing & Interlocks
- Signaling Devices
- HMI (Terminals and Industrial PC)
- Sensors & RFID System
- Motor Starters
- Components for Motor Starters
- Variable Speed Drives & Soft Starters
- Motion Control & Robotics
- Interface, Measurement & Control Relays
- PLC, PAC & other Controllers
- Industrial Communication

Select your training



- > Find the right [Training](#) for your needs on our Global website
- > Locate the training center with the selector tool, using this [link](#)

Training and courses

Training by domain of expertise

- Electrical installation and safety
- Data Center
- Industry Automation

General contents

Harmony® XALD, XALK plastic control stations

| | |
|---|----------------|
| Selection guide | page 2 |
| ■ Presentation | page 4 |
| ■ References | |
| □ Complete stations (Screw clamp terminal connections)..... | page 8 |
| □ Stations for customer assembly: empty enclosures | page 13 |
| □ Stations for customer assembly: electrical blocks | page 14 |
| □ Stations for customer assembly: heads | page 15 |
| □ Stations for customer assembly: accessories | page 29 |
| ■ Product reference index | page 40 |

| Type of applications | All applications | |
|----------------------|---|----------------------------|
| Enclosures | Plastic | Glass-reinforced polyester |
| | Complete stations and separate components for customer assembly | Empty insulated enclosures |



| Main feature | Pre-drilled control stations | | Pre-drilled or undrilled enclosures |
|---|--|---|--|
| Associated control and signaling units | Harmony XB5 with plastic bezel | | Harmony XB7, monolithic, plastic Harmony XB4 with metal bezel Harmony XB5 with plastic bezel |
| Number of cut-outs for Ø 22 control and signaling units | 1, 2, 3, 4 or 5 | 1, 2 or 3 (complete stations) 1, 2, 3, 4 or 5 (empty enclosures) | 1, 2 or 3 1, 2, 4, 8 or 16 |
| Material | Polycarbonate | | ABS Glass-reinforced polyester |
| Color | Yellow lid Light gray base | Dark gray lid Light gray base | Light gray or yellow lid Light gray base Coloured gray throughout |
| Degree of protection | IP 65 / NEMA Enclosure type 4, 4X and 13 | | IP 54 IP 65 |
| Function | Emergency Stop or Emergency switching off | Start or Stop Start-Stop with pilot light Motion control | According to equipment fitted: <input type="checkbox"/> Start or Stop <input type="checkbox"/> Start-Stop with pilot light <input type="checkbox"/> Motion control <input type="checkbox"/> Emergency stop |
| Cable entries | Knock-outs (CM12) | | Knock-outs (ISO 20) Undrilled |
| Type references | XALK | XALD | XALE XAPA |

| All applications | | Specific applications | | |
|------------------|--|--|--------------------------|-------------------------------|
| Metal | Metal front plate, insulated protective rear cover | Plastic | Metal | |
| Empty enclosures | Empty, flush mounting enclosures: front plate + rear cover | Control stations for severe environments | Lift inspection stations | Key operated control stations |




| Pre-drilled enclosures | Pre-drilled or undrilled enclosures | Pre-drilled front plates & rear covers | Pre-drilled empty control stations | Pre-drilled empty enclosures or fitted stations | Fitted stations |
|--|--|---|------------------------------------|---|-------------------------|
| Harmony XB4 with metal bezel Harmony XB5 with plastic bezel | | | Harmony XB5 with plastic bezel | Harmony XB5 or XB7 with plastic bezel | With key lock bezel |
| 8, 16, 24, 30 or 40 | 1, 2, 3, 4, 6, 8 or 12 | 1, 2, 3, 4 or 5 | 1, 2, 3, 4 or 5 | 1, 2, 3, 4, 5 or 6 with or without power socket | - |
| Aluminium alloy or sheet steel | Zinc or aluminium alloy | Front plate: brushed aluminium Rear cover: polystyrene | Mineral reinforced polyamide | Polycarbonate | Zinc alloy |
| Blue lid and base | XAPM: Blue lid Blue base XAPJ: Yellow lid Blue base | Unpainted aluminium | Black lid Black base | Yellow lid Light gray base | Gray |
| IP 54 | IP 65 | | IP 66 IP 69K | IP 44 (with power socket) IP 55 or IP 66 depending on model | IP 54 |
| According to equipment fitted: <input type="checkbox"/> Start or Stop <input type="checkbox"/> Start-Stop with pilot light <input type="checkbox"/> Motion control <input type="checkbox"/> Emergency stop | | | | | Start-Stop |
| <input type="checkbox"/> Tapped entries for cable-glands <input type="checkbox"/> or undrilled | Tapped entries for cable-glands | Knock-outs (with protective rear cover) | Two ISO 20 open entries | <input type="checkbox"/> Knock-outs (CM12) <input type="checkbox"/> or undrilled | Tapped for cable-glands |
| XB2SL | XAPM, XAPJ | XAPE | XALG | XALF | XAPS |

Control stations and enclosures

Plastic control stations XALD and XALK

For Harmony® XB5 control and signaling units Ø 22

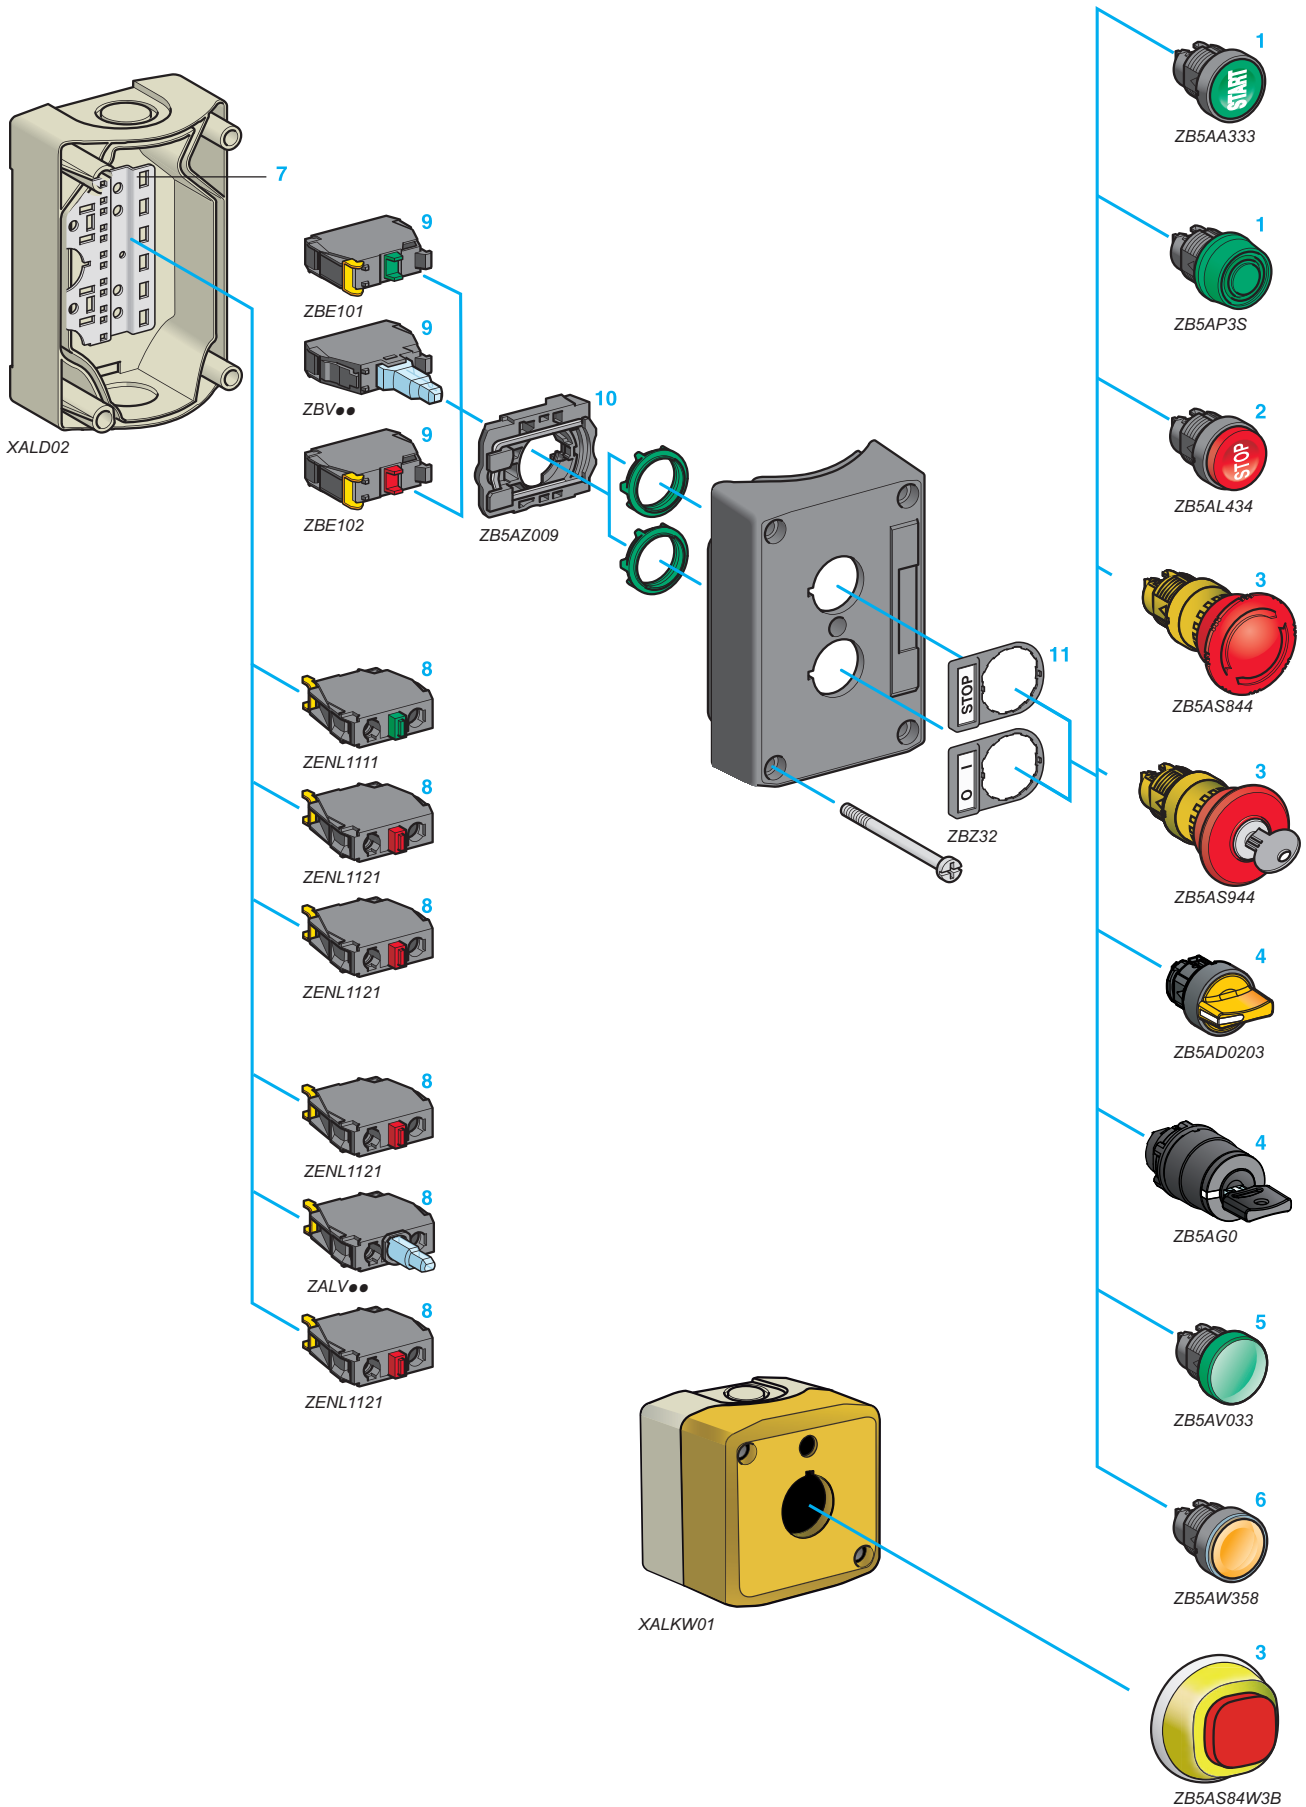

Control stations and enclosures

Plastic control stations XALD and XALK

For Harmony XB5 control and signaling units Ø 22

Presentation

Harmony® XALD and XALK control stations are available in two forms:

- Complete
- For customer assembly

These control stations use the plastic bezel pushbuttons, switches and pilot lights of the Harmony XB5 range, which offers a wide choice of circular and square types of head.

Complete pre-assembled stations

These are complete, ready to install, stations fitted with 1 to 3 buttons to cater for the most commonly encountered functions:

■ **Start or Stop**, with:

- 1 flush spring return pushbutton,
- 1 red, spring return, mushroom head pushbutton.

■ **Emergency stop or Emergency switching off**, with:

- 1 red, latching, mushroom head pushbutton **3**, either push-pull or turn to release, with or without key.

■ **Start-Stop**, with:

- 2 flush spring return pushbuttons,
- 1 flush spring return pushbutton **1** + 1 projecting spring return pushbutton **2**,
- 1 2-position selector switch **4** + 1 pilot light with integral red LED, if required.

■ **Two functions**, with:

- 2 flush spring return pushbuttons **1**.

■ **Three functions**, with:

- 3 flush spring return pushbuttons **1**,
- 2 flush spring return pushbuttons **1** + 1 projecting spring return pushbutton **2**,
- 2 flush spring return pushbuttons **1** + 1 red, latching, mushroom head pushbutton **3**.

These pushbuttons, switches and pilot lights comprise plastic heads from the Harmony XB5 range and electrical blocks (contact or light) **8** that are mounted in the back of the enclosure.

Control stations and enclosures

Plastic control stations XALD and XALK

For Harmony XB5 control and signaling units Ø 22

Presentation (Continued)

Stations for customer assemblies

These stations are for assembly by the user and offer a choice of 2 assembly methods:

■ Box method

Identical to the pre-assembled versions. The electrical blocks 8 are mounted on a metal mounting plate in the back of the enclosure 7.

■ Station method

The electrical blocks 9 are mounted directly beneath the heads using a body/fixing collar 10.

It is possible to assemble stations with 1 to 5 heads, each of which can be combined with 3 electrical blocks 8 or 9 (contact or light).

The XAL range offers a wide choice of head types for:

- Spring return pushbuttons 1 or 2, either marked or unmarked
- Spring return mushroom head pushbuttons
- Latching mushroom head pushbuttons 3
- Selector switches with standard or long handle and key switches 4
- Toggle switches
- Pilot lights 5
- Illuminated spring return pushbuttons 6

Illuminated selector switches with standard handle 4.

Accessories for heads

Markings can be customised by using legend holders 11 which can either be fitted with pre-marked legends or legends engraved by the user. Alternatively, paper legends (protected), prepared using "SIS Label" software 12, or peel-off legends (supplied on sheet for marking by laser printer) can be used.

Control stations and enclosures

Plastic control stations XALD and XALK

For Harmony XB5 control and signaling units Ø 22

XALD-X_CP19045



Customized products

Presentation (Continued)

Customization

- Markings on pushbutton, illuminated pushbuttons, and pilot lights caps
- Markings on accessories, like legend plates and legend panels
- Color plated bezel pushbuttons
- Marking on control station

Material and colors

- **Start-Stop** control stations (**XALD**):
light gray base "RAL 7035", dark gray lid "RAL 7016"
- Control stations with **Emergency stop** or **Emergency switching off** functions (**XALK**): light gray "RAL 7035" base, yellow "RAL 7021" lid
- Lid fixing screws and nut material: stainless steel type A4, AISI 316.

Environment

- Protection degree: IP66, IP69 (EN/IEC 60529) and IP69K (ISO20653) and UL/CSA Enclosure type 4, 4X and 13
- Mechanical shock protection level: up to IK08 (EN50102/IEC60068-2-75)
- High pressure cleaning resistance: 70 x 10⁵ Pa (70 bars), distance 0.1 m (temp. 55° C)
- Ambient air temperature for operation: - 40 to + 70° C
- Conformity to standards :
 - EN/IEC 60947-5-1, 60947-5-4 for **Start-Stop** control stations,
 - EN/IEC 60204-1 and EN/ISO 13850 for control stations with **Emergency stop** function,
 - IEC 60364-5-53 for control stations with **Emergency switching off** function
- Product certifications : UL Listed, CSA, GOST

Connection

- Knock-out entries for cable-gland (CM 12, Pg 13.5 and tapped ISO 20).
- Knock-outs for cable entry through rear.

Control stations and enclosures



Plastic control stations XALD and XALK

For Harmony XB5 control and signaling units Ø 22

Complete stations (screw clamp terminal connections)

Start or Stop function

■ Light gray "RAL 7035" base, dark gray "RAL 7016" lid

| Description | Type of push | Dimensions (1) w x h x d mm/in. | Type of contact | | Marking | Reference | Weight kg/lb |
|-------------|--------------|---------------------------------------|---|---|---------|-----------|-----------------|
| | | |  |  | | | |

Marking on pushbutton

| | | | | | | | |
|----------------------------|-----------------|---------------------------------------|---|---|--------|--------------------|-------------|
| 1 spring return pushbutton | Flush, green | 68 x 68 x 62/ 2.68 x 2.68 x 2.44 | 1 | - | I | XALD102 (2) | 0.135/0.298 |
| | | | | | Marche | XALD104 (2) | 0.156/0.344 |
| | | | | | Start | XALD103 (2) | 0.156/0.344 |
| | Flush, red | 68 x 68 x 62/ 2.68 x 2.68 x 2.44 | - | 1 | I | XALD102E | 0.165/0.364 |
| | | | | | Arrêt | XALD117 | 0.156/0.344 |
| | | | | | Stop | XALD114 (2) | 0.165/0.364 |
| | Projecting, red | 68 x 68 x 66.5/ 2.68 x 2.68 x 2.62 | - | 1 | O | XALD112E | 0.165/0.364 |
| | | | | | Stop | XALD114E | 0.165/0.364 |
| | | | | | Arrêt | XALD115 (2) | 0.157/0.346 |
| | | | 1 | 1 | O | XALD118 | 0.157/0.346 |
| | | | | | Stop | XALD116 | 0.157/0.346 |

Marking on legend holder and legend below head

| | | | | | | | |
|---|--------------|-------------------------------------|---|---|--------|-----------------------|-------------|
| 1 spring return pushbutton | Flush, green | 68 x 68 x 62/ 2.68 x 2.68 x 2.44 | 1 | - | Marche | XALD101 (2) | 0.157/0.346 |
| | | | | | Start | XALD101H29 (2) | 0.157/0.346 |
| | Flush, red | 68 x 68 x 62/ 2.68 x 2.68 x 2.44 | - | 1 | Arrêt | XALD111 | 0.157/0.346 |
| | | | | | Stop | XALD111H29 (2) | 0.157/0.346 |
| 1 mushroom head pushbutton, Ø 40 mm/1.57 in., spring return | Red | 68 x 68 x 86/ 2.68 x 2.68 x 3.39 | - | 1 | Arrêt | XALD164 (2) | 0.182/0.401 |
| | | | | | Stop | XALD164H29H7 | 0.182/0.401 |

(1) Please see our website www.schneider-electric.com for more precised information about dimensions of components.

(2) Please add H7 for UL/CSA conformity, example: XALK102H7.



XALD102



XALD115



XALD101



XALD111



XALD164

Control stations and enclosures

Plastic control stations XALD and XALK

For Harmony XB5 control and signaling units Ø 22

Complete stations (screw clamp terminal connections)

Emergency stop and Emergency switching off functions conforming to EN/IEC 60204-1, 60364-5-53, EN/ISO 13850, and Machinery Directive 2006/42/EC

Emergency stop function: Mushroom head Emergency stop trigger action and mechanical latching pushbuttons conform to standards EN/IEC 60204-1 and EN/ISO 13850, to Machinery Directive 2006/42/EC and to standard EN/IEC 60947-5-5.

Emergency switching off function: Mushroom head switching off mechanical latching pushbuttons conform to standards IEC 60364-5-53 and EN/IEC 60947-5-5.


Please consult our Customer Care Centre for a full explanation of these standards and directives.

Emergency stop and Emergency switching off functions with trigger action and mechanical latching

■ Light gray "RAL 7035" base, yellow "RAL 1021" lid

■ Conformity to standards EN/IEC 60204-1, EN/ISO 13850 (1), EN/IEC 60947-5-5 and to Machinery directive 2006/42/CE (2)

| Description | Dimensions (3) w x h x d mm/in. | Type of contact | | Marking | Reference | Weight kg/lb |
|--|--|-----------------|----|-----------------|-------------------------|-----------------|
| | | NO | NC | | | |
| Unmarked | | | | | | |
| 1 mushroom head pushbutton, Ø 40 mm/1.57 in., red Turn to release | 68 x 68 x 92.5/ 2.68 x 2.68 x 3.64 | – | 1 | – | XALK178 (4) | 0.194/0.428 |
| | | – | 2 | – | XALK178F (4) | 0.194/0.428 |
| | | 1 | 1 | – | XALK178E (4) | 0.194/0.428 |
| | | 1 | 2 | – | XALK178G (4) | 0.194/0.428 |
| 1 mushroom head pushbutton, Ø 40 mm/1.57 in., red Key release (key no. 455) | 68 x 68 x 114.5/ 2.68 x 2.68 x 4.51 | – | 1 | – | XALK188 (4) | 0.188/0.414 |
| | | – | 2 | – | XALK188F | 0.188/0.414 |
| | | 1 | 1 | – | XALK188E (4) | 0.188/0.414 |
| | | 1 | 2 | – | XALK188G | 0.188/0.414 |
| 1 mushroom head pushbutton, Ø 40 mm/1.57 in., red Push-pull | 68 x 68 x 91.5/ 2.68 x 2.68 x 3.60 | – | 1 | – | XALK198 (4) | 0.193/0.425 |
| Marked | | | | | | |
| 1 mushroom head pushbutton, Ø 40 mm/1.57 in., red Turn to release | 68 x 68 x 92.5/ 2.68 x 2.68 x 3.64 | – | 1 | NODSTOP | XALK178H26 | 0.194/0.428 |
| | | – | 1 | EMERGENCY STOP | XALK178H29 (4) | 0.194/0.428 |
| | | – | 1 | NOT HALT | XALK178H44 | 0.194/0.428 |
| | | – | 1 | NODSTOPP | XALK178H49 | 0.194/0.428 |
| | | – | 2 | NODSTOP | XALK178FH26 | 0.194/0.428 |
| | | – | 2 | EMERGENCY STOP | XALK178FH29 | 0.194/0.428 |
| | | – | 2 | NOT HALT | XALK178FH44 | 0.194/0.428 |
| | | – | 2 | NODSTOPP | XALK178FH49 | 0.194/0.428 |
| | | 1 | 2 | ARRET D'URGENCE | XALK178GTHFR (5) | 0.197/0.434 |
| | | 1 | 2 | NODSTOP | XALK178GTH26 (5) | 0.197/0.434 |
| | | 1 | 2 | EMERGENCY STOP | XALK178GTH29 (5) | 0.197/0.434 |
| | | 1 | 2 | NOT HALT | XALK178GTH44 (5) | 0.197/0.434 |
| | | – | 2 | NODSTOP | XALK188GTH26 (5) | 0.188/0.414 |

(1) Our Customer Care Centre may provide a control station type XALK188 with marking of the Emergency stop function and of the logo  in conformity with the requests of EN/ISO 13850 standard, paragraph 4.4.6.

(2) Please consult our Customer Care Centre for full details of these standards and directives.

(3) Please see our website www.schneider-electric.com for more precised information about dimensions of components.

(4) Please add H7 for UL/CSA conformity, example: XALK178H7.

(5) T for direct head mounting on cover with ZB5AZ009 fixing base.



XALK178●



XALK188●



XALK198

Control stations and enclosures

Plastic control stations XALD and XALK

For Harmony XB5 control and signaling units Ø 22

Complete stations (screw clamp terminal connections)

Emergency stop and Emergency switching off functions conforming to EN/IEC 60204-1, 60364-5-53, EN/ISO 13850, and Machinery Directive 2006/42/EC

Emergency stop function: Mushroom head Emergency stop trigger action and mechanical latching pushbuttons conform to standards EN/IEC 60204-1 and EN/ISO 13850, to Machinery Directive 2006/42/EC and to standard EN/IEC 60947-5-5.


Emergency switching off function: Mushroom head switching off mechanical latching pushbuttons conform to standards IEC 60364-5-53 and EN/IEC 60947-5-5.

Please consult our Customer Care Centre for a full explanation of these standards and directives.

Illuminated Emergency stop and Emergency switching off pushbuttons with trigger action and mechanical latching

■ Light gray "RAL 7035" base, yellow "RAL 1021" lid

■ Conformity to standards EN/IEC 60204-1, EN/ISO 13850 (1), EN/IEC 60947-5-5 and to Machinery directive 2006/42/CE (2)




XALK84W3BE



XALK178W3B140E

| Description | Type of reset | Signalling type | Type of contact | | Supply voltage | Reference | Weight kg/lb |
|---|-----------------|-----------------------------------|-----------------|----|----------------|-----------------------|--------------|
| | | | NO | NC | | | |
| Complete control station for Ø 22 mm/ 0.866 in. XB5 Emergency stop and Emergency switching off pushbuttons | Turn to release | Fixed white + fixed red, bi-color | 1 | 1 | 24 V ~ | XALK84W3BE | 0.182/0.401 |
| | | | 1 | 2 | 24 V ~ | XALK84W3BG | 0.182/0.401 |
| | Fixed, red | Fixed, red | 1 | 1 | 230 V ~ | XALK84W2ME | 0.182/0.401 |
| | | | 1 | 2 | 230 V ~ | XALK84W2MG | 0.182/0.401 |
| | | | 1 | 1 | 24V ~ | XALK178W3B140E | 0.180/0.397 |
| | | | 1 | 2 | 24V ~ | XALK178W3B140G | 0.180/0.397 |

(1) For compliance with EN/ISO 13850 standard, paragraph 4.4.6 Emergency Stop function logo  has been added.
 (2) Please consult our Customer Care Centre for full details of these standards and directives.

Control stations and enclosures





Plastic control stations XALD and XALK

For Harmony XB5 control and signaling units Ø 22

Complete stations (screw clamp terminal connections)

Start-Stop function

■ Light gray "RAL 7035" base, yellow "RAL 1021" lid

| Description | Dimensions (3) w x h x d mm/in. | Type of contact | | Marking | Reference | Weight kg/lb | |
|--|---|---|---|----------------------------------|-------------------------------|---------------------|-----------------|
| | |  |  | | | | |
| Marking on pushbutton (2) | | | | | | | |
| 2 spring return pushbuttons: - 1 flush, green - 1 flush, red | 68 x 106 x 62/ 2.68 x 4.17 x 2.44 | 1 | – | I O | XALD213 (3) | 0.233/0.514 | |
| | | – | 1 | Marche Arrêt Start Stop | XALD224 (3) | 0.233/0.514 | |
| 2 spring return pushbuttons: - 1 flush, green - 1 projecting, red | 68 x 106 x 66.5/ 2.68 x 4.17 x 2.62 | 1 | 1 | I O | XALD213E | 0.252/0.556 | |
| | | 1 | – | Start Stop | XALD214 | 0.234/0.516 | |
| 2 spring return pushbuttons: - 1 flush, green - 1 projecting, red | 68 x 106 x 62/ 2.68 x 4.17 x 2.44 | 1 | – | Marche Arrêt | XALD211 (3) | 0.233/0.514 | |
| | | – | 1 | Start Stop | XALD211H29 (3) | 0.233/0.514 | |
| 2 spring return pushbuttons, - 1 flush, green - 1 flush, red | 68 x 106 x 62/ 2.68 x 4.17 x 2.44 | 1 | – | Ouverture Fermeture | XALD241 | 0.233/0.514 | |
| | | – | 1 | | | | |
| 1 selector switch with standard handle 2-position stay put | 68 x 106 x 80/ 2.68 x 4.17 x 3.15 | 1 | – | O-I | XALD134 (3) | 0.163/0.359 | |
| | | 1 | – | Arrêt-Marche | XALD132 (3) | 0.163/0.359 | |
| 1 key switch (key no. 455), key withdrawal from left-hand position | 68 x 106 x 105.5/ 2.68 x 4.17 x 4.15 | 1 | – | Start Stop | XALD133H7 | 0.163/0.359 | |
| | | 1 | – | O-I | XALD144 (3) | 0.187/0.412 | |
| 1 key switch (key no. 455), key withdrawal from left-hand position | 68 x 106 x 105.5/ 2.68 x 4.17 x 4.15 | 1 | 1 | Arrêt-Marche | XALD142 | 0.196/0.432 | |
| | | 1 | 1 | O-I | XALD144E (3) | 0.196/0.432 | |
| Description | | | | | | | |
| Description | Dimensions (3) w x h x d mm/in. | Type of contact | | Marking | Pilot light supply V | Reference | Weight kg/lb |
| | |  |  | | | | |
| With pilot light and marking on pushbutton (2) | | | | | | | |
| 2 spring return pushbuttons and 1 pilot light with integral red LED | 68 x 136 x 64.5/ 2.68 x 5.35 x .54 | 1 | – | I | 24 ~ | XALD363B | 0.261/0.575 |
| | | – | 1 | O | 120 ~ | XALD363G (3) | 0.261/0.575 |
| | | – | 1 | | 230 ~ | XALD363M | 0.261/0.575 |
| With pilot light and marking on legend holder and legend below head | | | | | | | |
| 2 spring return pushbuttons and 1 pilot light with integral red LED | 68 x 136 x 64.5/ 2.68 x 5.35 x .54 | 1 | – | Marche | 24 ~ | XALD361B | 0.261/0.575 |
| | | – | 1 | Arrêt | 230 ~ | XALD361M (3) | 0.261/0.575 |

(1) Please see our website www.schneider-electric.com for more precised information about dimensions of components.

(2) Push supplied with cap not clipped-in, allowing orientation through 90° in 360° steps.

(3) Please add H7 for UL/CSA conformity, example: XALD213H7.



XALD224



XALD211H29



XALD134



XALD144



XALD363B

Control stations and enclosures



Plastic control stations XALD and XALK

For Harmony XB5 control and signaling units Ø 22

Complete stations (screw clamp terminal connections)



Two function

■ Light gray "RAL 7035" base, yellow "RAL 1021" lid

| Description | Dimensions (1) w x h x d mm/in. | Type of contact | | Marking | Reference | Weight kg/lb |
|--|---------------------------------------|---|---|---------|-------------|-----------------|
| | |  |  | | | |
| 2 spring return pushbuttons: - 1 flush, white - 1 flush, black | 68 x 106 x 62/ 2.68 x 4.17 x 2.44 | 1 | – | ↑ | XALD222 (4) | 0.233/0.514 |
| | | 1 | – | ↓ | | |
| | | 1 | 1 | → | XALD223 | 0.233/0.514 |
| | | 1 | 1 | ← | | |
| | | 1 | 1 | ↑ | XALD222E | 0.233/0.514 |
| | | 1 | 1 | ↓ | | |

Three function

■ Light gray "RAL 7035" base, yellow "RAL 1021" lid

| Description | Dimensions (1) w x h x d mm/in. | Type of contact | | Marking | Reference | Weight kg/lb |
|--|---------------------------------------|---|---|----------|--------------|-----------------|
| | |  |  | | | |
| 3 spring return pushbuttons: - 1 flush, green - 1 flush, red - 1 flush, green | 68 x 136 x 62/ 2.68 x .35 x 2.44 | 1 | – | I | XALD339 (4) | 0.298/0.657 |
| | | – | 1 | O | | |
| 3 spring return pushbuttons: - 1 flush, white - 1 flush, red - 1 flush, black | 68 x 136 x 62/ 2.68 x .35 x 2.44 | 1 | – | ↑ | XALD324 (4) | 0.298/0.657 |
| | | – | 1 | O | | |
| | | 1 | – | ↓ | XALD326 (4) | 0.298/0.657 |
| | | 1 | – | ↑ | | |
| | | 1 | 1 | Stop | XALD334 (4) | 0.298/0.657 |
| | | 1 | 1 | ↓ | | |
| | | 1 | 1 | → | XALD324E | 0.317/0.699 |
| | | 1 | 1 | O | | |
| | | 1 | 1 | ↓ | XALD325 | 0.299/0.659 |
| | | 1 | – | ↑ | | |
| 3 spring return pushbuttons: - 1 flush, white - 1 projecting, red - 1 flush, black | 68 x 136 x 62/ 2.68 x .35 x 2.44 | 1 | – | ↑ | XALD328 (4) | 0.317/0.699 |
| | | – | 1 | O | | |
| 2 spring return + 1 mushroom head pushbuttons: - 1 flush, white - 1 mushroom head, red (3) - 1 flush, black | 68 x 136 x 87.5/ 2.68 x .35 x 3.44 | 1 | – | ↑ | XALD311 (4) | 0.299/0.659 |
| | | – | 1 | O | | |
| | | 1 | – | ↓ | XALD311H29H7 | 0.299/0.659 |
| | | 1 | – | ↑ | | |
| 3 spring return pushbuttons: - 1 flush, green - 1 flush, red - 1 flush, green | 68 x 136 x 62/ 2.68 x .35 x 2.44 | 1 | – | Avant | XALD321 | 0.299/0.659 |
| | | – | 1 | Arrêt | | |
| | | 1 | – | Arrière | XALD321H29H7 | 0.299/0.659 |
| | | 1 | – | FORWARD | | |
| | | | | STOP | XALD321 | 0.299/0.659 |
| | | | | REVERSE | | |
| | | | | Montée | XALD321H29H7 | 0.299/0.659 |
| | | | | Arrêt | | |
| | | | | Descente | XALD321H29H7 | 0.299/0.659 |
| | | | | UP | | |
| | | | | STOP | XALD321H29H7 | 0.299/0.659 |
| | | | | DOWN | | |

(1) Please see our website www.schneider-electric.com for more precised information about dimensions of components.

(2) Push supplied with cap not clipped-in, allowing orientation through 90° in 360° steps.

(3) Standard turn to release, latching, Ø 30 mm/1.181 in.

(4) Please add H7 for UL/CSA conformity, example: XALD22H7.



XALD222



XALD339



XALD334

Control stations and enclosures

Plastic control stations XALD and XALK

For Harmony XB5 control and signaling units Ø 22

Stations for customer assembly: empty enclosures



XALD02



XALK01H29

Empty control stations with metal mounting plate in the back of enclosure


| Description | Text and logo | Dimensions (1) w x h x d mm/in. | Number of cut-outs | Reference | Weight kg/lb |
|---|--|---------------------------------------|-----------------------|-----------------------|-----------------|
| Light gray "RAL 7035" base Dark gray "RAL 7016" lid | Without | 68 x 68 x 53/ 2.68 x 2.68 x 2.09 | 1 | XALD01 (6) | 0.136/0.300 |
| | | 68 x 106 x 53/ 2.68 x 4.17 x 2.09 | 2 | XALD02 (6) | 0.193/0.425 |
| | | 68 x 136 x 53/ 2.68 x 5.35 x 2.09 | 3 | XALD03 (6) | 0.238/0.525 |
| | | 68 x 166 x 53/ 2.68 x 6.54 x 2.09 | 4 | XALD04 (6) | 0.278/0.613 |
| | | 68 x 196 x 53/ 2.68 x 7.72 x 2.09 | 5 | XALD05 (6) | 0.322/0.710 |
| Light gray "RAL 7035" base Yellow "RAL 1021" lid For Emergency stop function (7) | Without | 68 x 68 x 53/ 2.68 x 2.68 x 2.09 | 1 | XALK01 (5) (6) | 0.136/0.300 |
| | | 68 x 106 x 53/ 2.68 x 4.17 x 2.09 | 2 | XALK02 | 0.193/0.425 |
| | | 68 x 136 x 53/ 2.68 x 5.35 x 2.09 | 3 | XALK03 (5) | 0.238/0.525 |
| | | 68 x 166 x 53/ 2.68 x 6.54 x 2.09 | 4 | XALK04 | 0.278/0.613 |
| | | 68 x 196 x 53/ 2.68 x 7.72 x 2.09 | 5 | XALK05 | 0.322/0.710 |
| | With text "ARRET D'URGENCE" (2) and logo (3) | 68 x 68 x 53/ 2.68 x 2.68 x 2.09 | 1 | XALK01HFR | 0.136/0.300 |
| | With text "EMERGENCY STOP" (2) and logo (3) | 68 x 68 x 53/ 2.68 x 2.68 x 2.09 | 1 | XALK01H29 | 0.136/0.300 |
| | With text "NOT HALT" (2) and logo (3) | 68 x 68 x 53/ 2.68 x 2.68 x 2.09 | 1 | XALK01H44 | 0.136/0.300 |
| CSA + UL certified (4) | | | | | |
| Light gray "RAL 7035" base Dark gray "RAL 7016" lid | Without | 68 x 68 x 53/ 2.68 x 2.68 x 2.09 | 1 | XALD01H7 | 0.136/0.300 |
| | | 68 x 106 x 53/ 2.68 x 4.17 x 2.09 | 2 | XALD02H7 | 0.205/0.425 |
| | | 68 x 136 x 53/ 2.68 x 5.35 x 2.09 | 3 | XALD03H7 | 0.238/0.525 |
| | | 68 x 136 x 53/ 2.68 x 5.35 x 2.09 | 3 | XALD04H7 | 0.238/0.525 |
| | | 68 x 136 x 53/ 2.68 x 5.35 x 2.09 | 3 | XALD05H7 | 0.238/0.525 |

Empty control stations with direct head mounting on cover with ZB5AZ009 fixing base

| | | | | | |
|--|--|-------------------------------------|---|-------------------|-------------|
| Light gray "RAL 7035" base Yellow "RAL 1021" lid For Emergency stop function | Without | 68 x 68 x 53/ 2.68 x 2.68 x 2.09 | 1 | XALK01T | 0.136/0.300 |
| | With text "ARRET D'URGENCE" (2) and logo (3) | 68 x 68 x 53/ 2.68 x 2.68 x 2.09 | 1 | XALK01THFR | 0.136/0.300 |
| | With text "NODSTOP" (2) and logo (3) | 68 x 68 x 53/ 2.68 x 2.68 x 2.09 | 1 | XALK01TH26 | 0.136/0.300 |
| | With text "EMERGENCY STOP" (2) and logo (3) | 68 x 68 x 53/ 2.68 x 2.68 x 2.09 | 1 | XALK01TH29 | 0.136/0.300 |

(1) Please see our website www.schneider-electric.com for more precised information about dimensions of components.

(2) For supply of the text in an other language, please consult our Customer Care Centre.

(3) For complying with ISO 13850 standard, paragraph 4.4.6., Emergency Stop function logo  has been added.

(4) Volt-free commoning/earth terminal included.

(5) Please add H7 for UL/CSA conformity, example: XALD01H7.

(6) To add customized markings on these references through web customization tool, see page 7.

(7) Red color pushbutton must be used only for Emergency stop function with XALK yellow background.

Control stations and enclosures

Plastic control stations XALD and XALK

For Harmony XB5 control and signaling units Ø 22

Stations for customer assembly: electrical blocks

| Electrical blocks and accessories for mounting in back of enclosure | | | | | |
|---|----------------|---------------|-----------------|-----------------|---------------|
| Description | Supply Voltage | Color | Sold in lots of | Unit reference | Weight kg/lb |
| Electrical blocks with screw clamp terminal connections | | | | | |
| Standard contact blocks (1) | NO contact | – | 5 | ZENL1111 | 0.015/0.033 |
| | NC contact | – | 5 | ZENL1121 | 0.015/0.033 |
| Light blocks with integral LED (1) | 24 V ~ | White | 5 | ZALVB1 | 0.015/0.033 |
| | | Green | 5 | ZALVB3 | 0.015/0.033 |
| | | Red | 5 | ZALVB4 | 0.015/0.033 |
| | | Yellow | 5 | ZALVB5 | 0.015/0.033 |
| | | Blue | 5 | ZALVB6 | 0.015/0.033 |
| | | 110...120 V ~ | White | 5 | ZALVG1 |
| | Green | 5 | ZALVG3 | 0.015/0.033 | |
| | Red | 5 | ZALVG4 | 0.015/0.033 | |
| | Yellow | 5 | ZALVG5 | 0.015/0.033 | |
| | Blue | 5 | ZALVG6 | 0.015/0.033 | |
| | 230...240 V ~ | White | 5 | ZALVM1 | 0.015/0.033 |
| | | Green | 5 | ZALVM3 | 0.015/0.033 |
| | | Red | 5 | ZALVM4 | 0.015/0.033 |
| | | Yellow | 5 | ZALVM5 | 0.015/0.033 |
| | | Blue | 5 | ZALVM6 | 0.015/0.033 |



| Electrical blocks and accessories for mounting in back of enclosure | | | | | |
|---|----------------|--------|-----------------|----------------|--------------|
| Description | Supply Voltage | Color | Sold in lots of | Unit reference | Weight kg/lb |
| Electrical blocks with screw clamp terminal connections | | | | | |
| Standard contact blocks | NO contact | – | 5 | ZBE101 | 0.016/0.035 |
| | NC contact | – | 5 | ZBE102 | 0.016/0.035 |
| Light blocks with integral LED | 24 V ~ | White | 5 | ZBVB1 | 0.016/0.035 |
| | | Green | 5 | ZBVB3 | 0.016/0.035 |
| | | Red | 5 | ZBVB4 | 0.016/0.035 |
| | | Orange | 5 | ZBVB5 | 0.016/0.035 |
| | | Yellow | 5 | ZBVB8 | 0.016/0.035 |
| | | Blue | 5 | ZBVB6 | 0.016/0.035 |
| | 110...120 V ~ | White | 5 | ZBVG1 | 0.016/0.035 |
| | | Green | 5 | ZBVG3 | 0.016/0.035 |
| | | Red | 5 | ZBVG4 | 0.016/0.035 |
| | | Orange | 5 | ZBVG5 | 0.016/0.035 |
| | | Yellow | 5 | ZBVG8 | 0.016/0.035 |
| | | Blue | 5 | ZBVG6 | 0.016/0.035 |
| | 230...240 V ~ | White | 5 | ZBVM1 | 0.016/0.035 |
| | | Green | 5 | ZBVM3 | 0.016/0.035 |
| | | Red | 5 | ZBVM4 | 0.016/0.035 |
| | | Orange | 5 | ZBVM5 | 0.016/0.035 |
| | | Yellow | 5 | ZBVM8 | 0.016/0.035 |
| | | Blue | 5 | ZBVM6 | 0.016/0.035 |




| Description | For use with | Supply voltage V | Level of protection | Sold in lots of | Unit reference | Weight kg/lb |
|--|---|------------------|---------------------|-----------------|-----------------|--------------|
| Electrical blocks with screw clamp terminal connections | | | | | | |
| LED suppressors for high powers (≥ 30 VA) | Electrical light blocks with integral LED | 120 V ~ | 25...120 VA | – | ZBZVG | 0.010/0.022 |
| | | 230 V ~ | 30...230 VA | – | ZBZVM | 0.010/0.022 |
| Body/fixing collar Sold in lots of 10 | Electrical blocks (contact or light) | – | – | 10 | ZB5AZ009 | 0.006/0.013 |

(1) A maximum of 3 electrical blocks can be fitted per associated head.

(2) For electrical blocks for printed circuit board connection: please consult our Customer Care Centre.

Heads and mounting base for potentiometer (1) (2)

| Shape of head | Description | For use with | Reference | | Weight kg/lb |
|---|---|-------------------------------|-----------------|--------------------|-----------------|
| | | | For black bezel | For gray bezel (3) | |
|  | For potentiometer with shaft length 45 to 50 mm/ 1.772 to 1.968 in. | Ø 6 mm/ 0.236 in. shaft | ZB5AD912 | ZB5AD912C0 | 0.032/0.071 |
| | | Ø 6.35 mm/ 0.250 in. shaft | ZB5AD922 | ZB5AD922C0 | 0.032/0.071 |

Timers

| Description | Output type | Supply voltage V | Time delay type | Time delay range | Reference | Weight kg/lb |
|--|--|--------------------------------|--|------------------|-----------------|-----------------|
| Panel-mounted timer function with status LED and 1 static output in 22.5 mm/0.886 in. hole | 1 static output | 24 $\overline{\text{---}}$ | Type A (delay on energization) | 0.5...10 s | XB5DTB22 | 0.027/0.060 |
| | | | | 3...60 s | XB5DTB23 | 0.027/0.060 |
| | | | | 0.5...10 min | XB5DTB24 | 0.027/0.060 |
| | | | | 3...60 min | XB5DTB25 | 0.027/0.060 |
| | | | | 0.5...10 s | XB5DTGM2 | 0.027/0.060 |
| | | | | 3...60 s | XB5DTGM3 | 0.027/0.060 |
| | 100...240 $\overline{\sim}$ - 50/60 Hz | Type A (delay on energization) | 100...240 $\overline{\sim}$ - 50/60 Hz | 0.5...10 min | XB5DTGM4 | 0.027/0.060 |
| | | | | 3...60 min | XB5DTGM5 | 0.027/0.060 |

Hour counters

| Description | Supply voltage V | Reference | Weight kg/lb |
|-----------------------|---|---------------|-----------------|
| Indication 0...9999.9 | 12...24 $\overline{\sim}$ - 50 or 60 Hz | XB5DSB | 0.045/0.099 |
| | 120 $\overline{\sim}$ - 60 Hz | XB5DSG | 0.045/0.099 |
| | 230...240 $\overline{\sim}$ - 50 Hz | XB5DSM | 0.045/0.099 |

USB and RJ45 ports



| Description | Interface type | Connection type | Degree of protection | Reference | Weight kg/lb |
|---|-------------------------------|------------------|---|-----------------|-----------------|
| Panel-mounted USB and RJ45 ports in 22.5 mm/0.886 in. hole with notch | USB interface, jack type A | USB port 3.0 A-A | IP20 | XB5PUSB3 | 0.017/0.037 |
| | | | IP65, IP67, IP69K with protection cover (4) | | |
| | Ethernet interface, RJ45 jack | RJ45 port Cat. 6 | IP20 | XB5PRJ45 | 0.027/0.060 |
| | | | IP65, IP67, IP69K with protection cover (4) | | |

(1) Potentiometer not included.

(2) To add customized markings on these references using web customization tool, see page 7.

(3) For white color plated bezel replace C0 with C1, and for other color plated bezels using the web customization tool, see page 7.

(4) For protection covers refer to the product instruction sheet of ZBSP1, ZBSP2, and ZBSP3 on www.schneider-electric.com.

XB5_633_CPSCT16045
XB5DTB22101187
XB5DSBXB5_633_CPSCT16027
XB5PUSB3XB5_633_CPSCT16027
XB5PRJ45

Control stations and enclosures

Plastic control stations XALD and XALK

For Harmony XB5 control and signaling units Ø 22

Stations for customer assembly: heads



ZB5AA0



ZB5AA5



ZB5AP2S



ZB5AL3



ZB5CA2



ZB5CA5

Heads for spring return pushbuttons - unmarked

| Shape of head | Type of push | Color of cap | Reference | | Weight kg/lb |
|---|---|----------------|------------------|-----------------------|--------------|
| | | | For black bezel | For gray bezel (4)(5) | |
| | Without cap (1) | – | ZB5AA0 | – | 0.022/0.049 |
| | Flush, with set of 6 colored caps | 6 colors (2) | ZB5AA9 | – | 0.027/0.060 |
| | Flush | White | ZB5AA1 | ZB5AA1C0 | 0.018/0.040 |
| | | Black | ZB5AA2 | ZB5AA2C0 | 0.018/0.040 |
| | | Green | ZB5AA3 | ZB5AA3C0 | 0.018/0.040 |
| | | Red | ZB5AA4 | ZB5AA4C0 | 0.018/0.040 |
| | | Yellow | ZB5AA5 | ZB5AA5C0 | 0.018/0.040 |
| | | Blue | ZB5AA6 | ZB5AA6C0 | 0.018/0.040 |
| | | Gray | ZB5AA8 | ZB5AA8C0 | 0.018/0.040 |
| | Flush with transparent cap, for insertion of legend (3) | White | ZB5AA18 | ZB5AA18C0 | 0.018/0.040 |
| Green | | ZB5AA38 | ZB5AA38C0 | 0.018/0.040 | |
| Red | | ZB5AA48 | ZB5AA48C0 | 0.018/0.040 | |
| Yellow | | ZB5AA58 | ZB5AA58C0 | 0.018/0.040 | |
| Booted (colored silicone) Can be replaced without dismantling the head | White | ZB5AP1S | – | 0.014/0.031 | |
| | Black | ZB5AP2S | – | 0.014/0.031 | |
| | Green | ZB5AP3S | – | 0.014/0.031 | |
| | Red | ZB5AP4S | – | 0.014/0.031 | |
| | Yellow | ZB5AP5S | – | 0.014/0.031 | |
| | Blue | ZB5AP6S | – | 0.014/0.031 | |
| Projecting | White | ZB5AL1 | ZB5AL1C0 | 0.019/0.042 | |
| | Black | ZB5AL2 | ZB5AL2C0 | 0.019/0.042 | |
| | Green | ZB5AL3 | ZB5AL3C0 | 0.019/0.042 | |
| | Red | ZB5AL4 | ZB5AL4C0 | 0.019/0.042 | |
| | Yellow | ZB5AL5 | ZB5AL5C0 | 0.019/0.042 | |
| | Blue | ZB5AL6 | ZB5AL6C0 | 0.019/0.042 | |
| Flush (high guard) | White | ZB5AA14 | ZB5AA14C0 | 0.020/0.044 | |
| | Black | ZB5AA24 | ZB5AA24C0 | 0.020/0.044 | |
| | Green | ZB5AA34 | ZB5AA34C0 | 0.020/0.044 | |
| | Red | ZB5AA44 | ZB5AA44C0 | 0.020/0.044 | |
| | Yellow | ZB5AA54 | ZB5AA54C0 | 0.020/0.044 | |
| | Blue | ZB5AA64 | ZB5AA64C0 | 0.020/0.044 | |
| Recessed (high guard) | White | ZB5AA16 | ZB5AA16C0 | 0.019/0.042 | |
| | Black | ZB5AA26 | ZB5AA26C0 | 0.019/0.042 | |
| | Green | ZB5AA36 | ZB5AA36C0 | 0.019/0.042 | |
| | Red | ZB5AA46 | ZB5AA46C0 | 0.019/0.042 | |
| | Yellow | ZB5AA56 | ZB5AA56C0 | 0.019/0.042 | |
| | Blue | ZB5AA66 | ZB5AA66C0 | 0.019/0.042 | |
| | Flush | White | ZB5CA1 | – | 0.019/0.042 |
| | Black | ZB5CA2 | – | 0.019/0.042 | |
| | Green | ZB5CA3 | – | 0.019/0.042 | |
| | Red | ZB5CA4 | – | 0.019/0.042 | |
| | Yellow | ZB5CA5 | – | 0.019/0.042 | |
| | Blue | ZB5CA6 | – | 0.019/0.042 | |
| | Projecting | White | ZB5CL1 | – | 0.021/0.046 |
| | Black | ZB5CL2 | – | 0.021/0.046 | |
| | Green | ZB5CL3 | – | 0.021/0.046 | |
| | Red | ZB5CL4 | – | 0.021/0.046 | |
| | Yellow | ZB5CL5 | – | 0.021/0.046 | |
| | Blue | ZB5CL6 | – | 0.021/0.046 | |

(1) Cap to be ordered separately, see page 37.

(2) Head supplied with 6 different colored caps (white, black, green, red, yellow, blue).

(3) For legend ordering information, see page 32.

(4) For white color plated bezel replace C0 with C1, and for other color plated bezels using the web customization tool, see page 7.

(5) To add customized markings on these references using the web customization tool, see page 7.

Control stations and enclosures

Plastic control stations XALD and XALK

For Harmony XB5 control and signaling units Ø 22

Stations for customer assembly: heads



ZB5AA331



ZB5AA432



ZB5AL232



ZB5AC24



ZB5AC2

Heads for spring return pushbuttons - marked

| Shape of head | Type of push | Marking | | Color of cap | Reference | | Weight kg/lb | | |
|---------------|----------------|---------|------------------|-----------------|-------------------|---------------------------|-------------------|-------------|-------------|
| | | Text | Color | | For black bezel | For gray bezel (2)/(3) | | | |
| | Flush (1) | I | White | Green | ZB5AA331 | ZB5AA331C0 | 0.018/0.040 | | |
| | | | Black | White | ZB5AA131 | ZB5AA131C0 | 0.018/0.040 | | |
| | | II | White | Green | ZB5AA336 | – | 0.018/0.040 | | |
| | | | Black | White | ZB5AA136 | – | 0.018/0.040 | | |
| | | START | White | Green | ZB5AA333 | ZB5AA333C0 | 0.018/0.040 | | |
| | | | Black | White | ZB5AA133 | – | 0.018/0.040 | | |
| | | ON | White | Green | ZB5AA341 | – | 0.018/0.040 | | |
| | | | Black | White | ZB5AA141 | – | 0.018/0.040 | | |
| | | MARCHE | White | Green | ZB5AA342 | – | 0.018/0.040 | | |
| | | | Black | White | ZB5AA142 | – | 0.018/0.040 | | |
| | | | | White | Black | ZB5AA245 | – | 0.018/0.040 | |
| | | | | Black | White | ZB5AA145 | – | 0.018/0.040 | |
| | | O | | White | Red | ZB5AA432 | ZB5AA432C0 | 0.018/0.040 | |
| | | | | Black | White | ZB5AA232 | – | 0.018/0.040 | |
| | | ARRET | | White | Red | ZB5AA433 | – | 0.018/0.040 | |
| | | | | Black | White | ZB5AA233 | – | 0.018/0.040 | |
| | | STOP | | White | Red | ZB5AA434 | ZB5AA434C0 | 0.018/0.040 | |
| | | | | Black | White | ZB5AA234 | – | 0.018/0.040 | |
| | | OFF | | White | Red | ZB5AA435 | – | 0.018/0.040 | |
| | | | | Black | White | ZB5AA235 | – | 0.018/0.040 | |
| UP | | Black | White | ZB5AA343 | – | 0.018/0.040 | | | |
| | | White | Black | ZB5AA344 | – | 0.018/0.040 | | | |
| DOWN | | White | Black | ZB5AA344 | – | 0.018/0.040 | | | |
| | | Black | White | ZB5AA343 | – | 0.018/0.040 | | | |
| † | | White | Black | ZB5AA335 | ZB5AA334C0 | 0.018/0.040 | | | |
| | | Black | White | ZB5AA334 | ZB5AA335C0 | 0.018/0.040 | | | |
| | Projecting (1) | O | White | Red | ZB5AL432 | ZB5AL432C0 | 0.019/0.042 | | |
| | | | Black | White | ZB5AL232 | – | 0.019/0.042 | | |
| | | ARRET | White | Red | ZB5AL433 | – | 0.019/0.042 | | |
| | | | Black | White | ZB5AL233 | – | 0.019/0.042 | | |
| | | STOP | White | Red | ZB5AL434 | – | 0.019/0.042 | | |
| | | | Black | White | ZB5AL234 | – | 0.019/0.042 | | |
| | | OFF | White | Red | ZB5AL435 | – | 0.019/0.042 | | |
| | | | Black | White | ZB5AL235 | – | 0.019/0.042 | | |
| | | | Flush (1) | I | White | Green | ZB5CA331 | – | 0.019/0.042 |
| | | | | | Black | White | ZB5CA131 | – | 0.019/0.042 |
| O | White | | | Red | ZB5CA432 | – | 0.019/0.042 | | |
| | Black | | | White | ZB5CA232 | – | 0.019/0.042 | | |
| + | White | | | Black | ZB5CA2934 | – | 0.019/0.042 | | |
| † | White | Black | ZB5CA2912 | – | 0.019/0.042 | | | | |
| R | White | Blue | ZB5CA6939 | – | 0.019/0.042 | | | | |

Mushroom heads for spring return pushbuttons

| Shape of head | Type of push | Diameter of push mm/in. | Color of push | Reference | Weight kg/lb |
|---------------|--------------|----------------------------|---------------|----------------|-----------------|
| | | 30/1.181 | Black | ZB5AC24 | 0.027/0.060 |
| | | | Green | ZB5AC34 | 0.027/0.060 |
| | | | Red | ZB5AC44 | 0.027/0.060 |
| | | | Yellow | ZB5AC54 | 0.027/0.060 |
| | | | Blue | ZB5AC64 | 0.027/0.060 |
| | | | Black | ZB5AC2 | 0.046/0.101 |
| | | 40/1.575 | Green | ZB5AC3 | 0.046/0.101 |
| | | | Red | ZB5AC4 | 0.046/0.101 |
| | | | Yellow | ZB5AC5 | 0.046/0.101 |
| | | | Blue | ZB5AC6 | 0.046/0.101 |

(1) Push supplied with cap not clipped-in, allowing orientation through 90° in 360° steps.

(2) For white color plated bezel replace C0 with C1, and for other color plated bezels using the web customization tool, see page 7.

(3) To add customized markings on these references using the web customization tool, see page 7.

Control stations and enclosures

Plastic control stations XALD and XALK

For Harmony XB5 control and signaling units Ø 22

Stations for customer assembly: heads



ZB5AT2




ZB5AS62



ZB5AS72



ZB5AW733



ZBZ48

Mushroom head pushbuttons (1) (2)

| Shape of head | Type of reset | Push | | Reference | Weight kg/lb |
|-------------------|--|-------------------|--------|--------------------|--------------|
| | | Diameter Ø mm/in. | Color | | |
| Heads only | | | | | |
| | Push-pull | 30/1.181 | Black | ZB5AT24 | 0.044/0.097 |
| | | 40/1.575 | Black | ZB5AT2 | 0.049/0.108 |
| | | 60/2.362 | Black | ZB5AX2 | 0.067/0.148 |
| | Turn to release | 30/1.181 | Black | ZB5AS42 | 0.040/0.088 |
| | | 40/1.575 | Black | ZB5AS52 | 0.044/0.097 |
| | | 40/1.575 | Yellow | ZB5AS55 | 0.044/0.097 |
| | | 60/2.362 | Black | ZB5AS62 | 0.064/0.141 |
| | Key release (key no. 455) (2 keys included with head) (3) (5) | 30/1.181 | Black | ZB5AS72 | 0.040/0.088 |
| | | 40/1.575 | Black | ZB5AS12 (4) | 0.044/0.097 |
| | | 60/2.362 | Black | ZB5AS22 | 0.064/0.141 |

Illuminated mushroom head pushbuttons (2)

| Shape of head | Type of reset | Push | | Reference | Weight kg/lb |
|---------------|-----------------|-------------------|--------|-----------------|--------------|
| | | Diameter Ø mm/in. | Color | | |
| | Turn to release | 40/1.575 | White | ZB5AW713 | 0.022/0.049 |
| | | | Green | ZB5AW733 | 0.022/0.049 |
| | | | Orange | ZB5AW753 | 0.022/0.049 |
| | | | Blue | ZB5AW763 | 0.022/0.049 |

Bellows for harsh environment

| For use in | Material | Color | Sold in lots of | Reference | Weight kg/lb |
|---|----------|-------|-----------------|--------------|--------------|
| Environment subject to humidity, dust, high pressure cleaning, etc. | Silicone | Red | 2 | ZBZ48 | 0.009/0.020 |

(1) These pushbuttons and heads cannot be used for an Emergency stop function. Therefore, it is recommended that a legend with a black or white background is used.

(2) Recommended maximum number of contacts constituting the body (fixing collar and contact) associated with the head, see Harmony XB5 catalog, page 22.

(3) For specific keys with other numbers, please contact our Customer Care Center.

(4) Other key numbers:

- key no. 421E: add suffix **12** to the reference.
- key no. 458A: add suffix **10** to the reference.
- key no. 520E: add suffix **14** to the reference.
- key no. 3131A: add suffix **20** to the reference.

Example: To order a Ø 40 mm/1.575 in. black mushroom head for a latching pushbutton, with release by key no. 421E, the reference becomes: ZB5AS1212.

(5) The symbol indicates key withdrawal position(s).

(6) Only for use with bodies comprising a light source with integral LED.

Control stations and enclosures

Plastic control stations XALD and XALK

For Harmony XB5 control and signaling units Ø 22


Emergency stop and Emergency switching off heads and circular yellow legends

Emergency stop and Emergency switching off functions conforming to EN/IEC 60204-1, 60364-5-53, EN/ISO 13850, and Machinery Directive 2006/42/EC


Emergency stop function: Mushroom head Emergency stop trigger action and mechanical latching pushbuttons conform to standards EN/IEC 60204-1 and EN/ISO 13850, Machinery Directive 2006/42/EC, and standard EN/IEC 60947-5-5.

Emergency switching off function: Mushroom head switching off mechanical latching pushbuttons conform to standards IEC 60364-5-53 and EN/IEC 60947-5-5.


Please contact our Customer Care Center for an explanation of these standards and directives.



ZB5AT84




ZB5AS844



ZB5AS834



ZB5AS934



ZBY9121



ZBY9420



ZBY9W2B330

Emergency stop and switching off pushbuttons with trigger action and mechanical latching (1) (2)

Screw clamp terminal connections (Schneider Electric anti-loosening system)

| Shape of head | Type of reset | Push | | Reference | Weight kg/lb |
|-------------------|--|-------------------|-------|--------------|--------------|
| | | Diameter Ø mm/in. | Color | | |
| Heads only | | | | | |
| | Push-pull | 30/1.181 | Red | ZB5AT844 | 0.049/0.108 |
| | | 40/1.575 | Red | ZB5AT84 | 0.049/0.108 |
| | | 60/2.362 | Red | ZB5AX84 | 0.067/0.148 |
| | Turn to release | 30/1.181 | Red | ZB5AS834 | 0.042/0.002 |
| | | 40/1.575 | Red | ZB5AS844 | 0.046/0.002 |
| | | 60/2.362 | Red | ZB5AS934 | 0.068/0.003 |
| | Key release (key no. 455) (2 keys included with head) (5)(3) | 30/1.181 | Red | ZB5AS934 | 0.068/0.003 |
| | | 40/1.575 | Red | ZB5AS944 (4) | 0.071/0.003 |
| | | 60/2.362 | Red | ZB5AS964 | 0.092/0.004 |
| | | 40/1.575 | Red | ZB5AS944D | 0.071/0.003 |
| | Key release (key no. 4A185) (5) | | | | |

Circular yellow legends for Emergency stop (6)

| Description | Marking | Color | Sold in lots of | Reference | Weight kg/lb |
|--|----------------------|--------|-----------------|-----------|--------------|
| Ø 60 mm/2.362 in. legend for Emergency stop function | – | Yellow | 5 | ZBY9121 | 0.007/0.015 |
| | EMERGENCY STOP | Yellow | 5 | ZBY9320 | 0.007/0.015 |
| | ARRET D'URGENCE | Yellow | 5 | ZBY9120 | 0.007/0.015 |
| | NOT HALT | Yellow | 5 | ZBY9220 | 0.007/0.015 |
| | PARADA DE EMERGENCIA | Yellow | 5 | ZBY9420 | 0.007/0.015 |
| | ARRESTO DI EMERGENZA | Yellow | 5 | ZBY9620 | 0.007/0.015 |

Illuminated rings for Emergency stop (6) (7)

| Description | Marking | Marking | Signaling | Color | Sold in lots of | Reference | Weight kg/lb |
|---|-----------------|-------------------|-----------|--------|-----------------|------------|--------------|
| Ø 60 mm/2.362 in. illuminated ring for Emergency stop | EMERGENCY STOP | Fixed, red 24 V ~ | | Yellow | 1 | ZBY9W2B330 | 0.031/0.068 |
| | ARRET D'URGENCE | Fixed, red 24 V ~ | | Yellow | 1 | ZBY9W2B130 | 0.031/0.068 |
| | NOT HALT | Fixed, red 24 V ~ | | Yellow | 1 | ZBY9W2B230 | 0.031/0.068 |

(1) For recommended maximum number of contacts constituting the body (fixing collar and contact) associated with the head, see Harmony XB5 catalog, page 22.

(2) It is recommended that a legend or yellow background is used.

(3) The symbol indicates key withdrawal position(s).

(4) Other key numbers:

- Key no. 421E: add suffix 12 to the reference.
- Key no. 458A: add suffix 10 to the reference.
- Key no. 520E: add suffix 14 to the reference.
- Key no. 3131A: add suffix 20 to the reference.
- Key no. 4A185: add suffix D to the reference.

For example, to order a Ø 40 mm/1.575 in. red mushroom head for a trigger action and mechanical latching Emergency stop pushbutton, with release by key no. 421E, the reference becomes ZB5AS94412.

(5) For specific keys with other numbers, please contact our Customer Care Center.

(6) For compliance with standard EN/ISO 13850, paragraph 4.4.6, the Emergency Stop function logo has been added.

(7) For additional references, see page 34.

Control stations and enclosures

Plastic control stations XALD and XALK

For Harmony XB5 control and signaling units Ø 22


Emergency stop and Emergency switching off heads and circular yellow legends

Emergency stop and Emergency switching off functions conforming to EN/IEC 60204-1, 60364-5-53, EN/ISO 13850, and Machinery Directive 2006/42/EC

Emergency stop function: Mushroom head Emergency stop trigger action and mechanical latching pushbuttons conform to standards EN/IEC 60204-1 and EN/ISO 13850, Machinery Directive 2006/42/EC, and standard EN/IEC 60947-5-5. Emergency switching off function: Mushroom head switching off mechanical latching pushbuttons conform to standards IEC 60364-5-53 and EN/IEC 60947-5-5.

Please contact our Customer Care Center for an explanation of these standards and directives.

Illuminated and non illuminated Emergency stop and Emergency switching off pushbuttons with trigger action and mechanical latching

| Shape of head | Type of reset | Signaling type | Type of contact | Supply voltage V | Diameter Ø mm/in. | Color of the push | Reference | Weight kg/lb |
|---|-----------------|-----------------------------------|-----------------|------------------|-------------------|-------------------|-------------------|--------------|
| Heads only | | | | | | | | |
|  | Turn to release | – | | – | 60/2.362 | Red | ZB5AS84W00 | 0.055/0.121 |
| | | Fixed, red | | 24 ~ | 60/2.362 | Red | ZB5AS84W2B | 0.055/0.121 |
| | | Fixed, red | | 120 ~ | 60/2.362 | Red | ZB5AS84W2G | 0.055/0.121 |
| | | Fixed, red | | 230 ~ | 60/2.362 | Red | ZB5AS84W2M | 0.055/0.121 |
| | | Fixed white + fixed red, bi-color | | 24 ~ | 60/2.362 | Red | ZB5AS84W3B | 0.055/0.121 |

XB5_633_CPFER18128A



ZB5AS84W2B

Empty control stations with metal mounting plate in the back of enclosure (1) (2)

| Description | Dimensions (4) w x h x d mm/in. | Number of cut-outs | Reference | Weight kg/lb |
|---|-------------------------------------|--------------------|----------------|--------------|
| Light gray “RAL 7035” base Yellow “RAL 1021” lid For Emergency stop function (3) | 68 x 68 x 53/ 2.68 x 2.68 x 2.09 | 1 | XALKW01 | 0.116/0.56 |

(1) For compliance with standard EN/ISO 13850, paragraph 4.4.6, the Emergency Stop function logo  has been added.

(2) Compatible only with illuminated Emergency stop pushbuttons ZB5AS84W●● and legend plate ZBY9W●●.

(3) Red color pushbutton must be used only for Emergency stop function with XALK yellow background.

(4) Please see our website www.schneider-electric.com for more precised information about dimensions of components.

Emergency stop and Emergency switching off functions conforming to EN/IEC 60204-1, 60364-5-53, EN/ISO 13850, and Machinery Directive 2006/42/EC

Emergency stop function: Mushroom head Emergency stop trigger action and mechanical latching pushbuttons conform to standards EN/IEC 60204-1 and EN/ISO 13850, Machinery Directive 2006/42/EC, and standard EN/IEC 60947-5-5. Emergency switching off function: Mushroom head switching off mechanical latching pushbuttons conform to standards IEC 60364-5-53 and EN/IEC 60947-5-5.


Please contact our Customer Care Center for an explanation of these standards and directives.

Illuminated Emergency stop and Emergency switching off functions, mechanical latching pushbuttons with mechanical state indicator (1)

For elevator inspection box applications

| Shape of head | Type of reset | Push Diameter Ø mm/in. | Color | Unit reference | Weight kg/lb |
|---------------|---------------|------------------------|-------|----------------|--------------|
|---------------|---------------|------------------------|-------|----------------|--------------|

Heads only (2)

| | | | | | |
|---|--|----------|-----|-------------------|-------------|
|  | Push-pull (1)(3) For Emergency stop and Emergency switching off function | 40/1.575 | Red | ZB5AT8643M | 0.034/0.075 |
|---|--|----------|-----|-------------------|-------------|

| Description | Conforming to standards | Marking on yellow background | Sold in lots of | Reference | Weight kg/lb |
|--|-----------------------------------|------------------------------|-----------------|----------------------|--------------|
| Illuminated Emergency stop function ZB5AT8643M with Ø 60mm / 2.362 in. legend plate | EN/IEC 60204-1 - and EN/ISO 13850 | | 10 | ZB5AT8643M140 | 0.034/0.075 |
| | | ARRET D'URGENCE | 10 | ZB5AT8643M130 | 0.034/0.075 |
| | | EMERGENCY STOP | 10 | ZB5AT8643M330 | 0.034/0.075 |
| | | NOT HALT | 10 | ZB5AT8643M230 | 0.034/0.075 |
| | | PARADA DE EMERGENCIA | 10 | ZB5AT8643M430 | 0.034/0.075 |
| | | ARRESTO DI EMERGENZA | 10 | ZB5AT8643M630 | 0.034/0.075 |

Illuminated Emergency switching off function only, mechanical latching pushbuttons Screw clamp terminal connections (Schneider Electric anti-loosening system)

| Shape of head | Type of reset | Push Diameter Ø mm/in. | Color | Reference | Weight kg/lb |
|---------------|---------------|------------------------|-------|-----------|--------------|
|---------------|---------------|------------------------|-------|-----------|--------------|

| | | | | | |
|---|------------------------|----------|-----|-----------------|-------------|
|  | Turn to release | 40/1.575 | Red | ZB5AW743 | 0.022/0.049 |
|---|------------------------|----------|-----|-----------------|-------------|

Circular yellow legends for ZB5AW743

| Diameter mm/in. | Conforming to standards | Marking on yellow background | Sold in lots of | Reference | Weight kg/lb |
|--|-------------------------|------------------------------|-----------------|----------------|--------------|
| Used for "Emergency switching off" function | | | | | |
| 60/2.362 | EN/IEC 60204-1 - | | 10 | ZBY9101 | 0.004/0.009 |
| | | COUPURE D'URGENCE | 10 | ZBY9160 | 0.004/0.009 |
| | | EMERGENCY SWITCHING OFF | 10 | ZBY9360 | 0.004/0.009 |
| | | NOT-AUS | 10 | ZBY9260 | 0.004/0.009 |
| | | DESCONEXION DE EMERGENCIA | 10 | ZBY9460 | 0.004/0.009 |
| | | INTERRUZIONE DI EMERGENZA | 10 | ZBY9660 | 0.004/0.009 |

(1) For recommended maximum number of contacts constituting the body (fixing collar and contact) associated with the head, see Harmony XB5 catalog, page 22.

(2) Only for use with bodies comprising a light source with integral LED.

(3) Cannot be used with metal guards ZBZ160.



ZB5AT8643M



ZB5AT8643M330



ZB5AW743



ZBY9360

Control stations and enclosures


Plastic control stations XALD and XALK
 For Harmony XB5 control and signaling units Ø 22
 General safe stops

General safe stops

General safe stops are used to stop the operation of a machine in a safe manner. These devices cannot be used as an Emergency stop and must not be associated with a yellow background. General safe stops comprise a yellow bezel and black head.



ZB5AT82Y



ZB5AS942Y

| Shape of head | Type of reset | Push | | Reference | Weight kg/lb |
|---------------|---|-------------------|-------|-----------|--------------|
| | | Diameter Ø mm/in. | Color | | |
| | Push-pull | 40/1.575 | Black | ZB5AT82Y | 0.050/0.110 |
| | Turn to release | 40/1.575 | Black | ZB5AS842Y | 0.046/0.101 |
| | Key release (key no. 455) (2 keys included with head) (1) | 40/1.575 | Black | ZB5AS942Y | 0.071/0.157 |

Bellows for harsh environments (2)



ZBZ58

| Description | Material | For use with | Color | Sold in lots of | Unit reference | Weight kg/lb |
|---|----------|---------------------------------------|--------|-----------------|----------------|--------------|
| For use in environments subject to humidity, dust, high pressure cleaning, etc. | Silicone | Other functions | Black | 2 | ZBZ28 | 0.009/0.020 |
| | | Emergency stop/switching off function | Yellow | 2 | ZBZ58 | 0.009/0.020 |

(1) The symbol indicates key withdrawal position(s).
 (2) Not compatible with Ø 30 mm/1.181 in. pushbuttons.

Control stations and enclosures

Plastic control stations XALD and XALK

For Harmony XB5 control and signaling units Ø 22

Stations for customer assembly: heads



ZB5AD2



ZB5AD204

Heads for selector switches (1)

| Shape of head | Type of operator | Number and type of positions | Reference | | Weight kg/lb | |
|---|---------------------------|---|--------------------|---------------------------|-----------------|-------------|
| | | | For black bezel | For gray bezel (2) (3) | | |
| | Standard handle, black | 2 - stay put | ZB5AD2 | ZB5AD2C0 | 0.017/0.037 | |
| | | 2 - spring return from right to left | ZB5AD4 | ZB5AD4C0 | 0.020/0.044 | |
| | | 3 - stay put | ZB5AD3 | ZB5AD3C0 | 0.017/0.037 | |
| | | 3 - spring return to centre | ZB5AD5 | ZB5AD5C0 | 0.017/0.037 | |
| | | 3 - spring return from left to centre | ZB5AD7 | ZB5AD7C0 | 0.017/0.037 | |
| | | 3 - spring return from right to centre | ZB5AD8 | ZB5AD8C0 | 0.017/0.037 | |
| | | Standard handle, white | 2 - stay put | ZB5AD201 | ZB5AD201C0 | 0.017/0.037 |
| | | 2 - spring return from right to left | ZB5AD401 | ZB5AD401C0 | 0.020/0.044 | |
| 3 - stay put | ZB5AD301 | ZB5AD301C0 | 0.017/0.037 | | | |
| 3 - spring return to centre | ZB5AD501 | ZB5AD501C0 | 0.017/0.037 | | | |
| 3 - spring return from left to centre | ZB5AD701 | ZB5AD701C0 | 0.017/0.037 | | | |
| 3 - spring return from right to centre | ZB5AD801 | ZB5AD801C0 | 0.017/0.037 | | | |
| Standard handle, green | Standard handle, green | 2 - stay put | ZB5AD203 | ZB5AD203C0 | 0.017/0.037 | |
| | | 2 - spring return from right to left | ZB5AD403 | ZB5AD403C0 | 0.020/0.044 | |
| | | 3 - stay put | ZB5AD303 | ZB5AD303C0 | 0.017/0.037 | |
| | | 3 - spring return to centre | ZB5AD503 | ZB5AD503C0 | 0.017/0.037 | |
| | | 3 - spring return from left to centre | ZB5AD703 | ZB5AD703C0 | 0.017/0.037 | |
| | | 3 - spring return from right to centre | ZB5AD803 | ZB5AD803C0 | 0.017/0.037 | |

(1) Can only be used for actuation of end of row (side) mounted contacts.

(2) For white color plated bezel replace C0 with C1, and for other color plated bezels using the web customization tool, see page 7.







(3) To add customized markings on these references using the web customization tool, see page 7.

Control stations and enclosures

Plastic control stations XALD and XALK
 For Harmony XB5 control and signaling units Ø 22
 Stations for customer assembly: heads



ZB5AD204

| Heads for selector switches (1) (continued) | | | | | | |
|---|--------------------------------|--|--|------------------------|-----------------|-------------|
| Shape of head | Type of operator | Number and type of positions | Reference | | Weight kg/lb | |
| | | | For black bezel | For gray bezel (2) (3) | | |
|  | Standard handle, red | 2 - stay put |  | ZB5AD204 | ZB5AD204C0 | 0.017/0.037 |
| | | 2 - spring return from right to left |  | ZB5AD404 | ZB5AD404C0 | 0.020/0.044 |
| | | 3 - stay put |  | ZB5AD304 | ZB5AD304C0 | 0.017/0.037 |
| | | 3 - spring return to centre |  | ZB5AD504 | ZB5AD504C0 | 0.017/0.037 |
| | | 3 - spring return from left to centre |  | ZB5AD704 | ZB5AD704C0 | 0.017/0.037 |
| | | 3 - spring return from right to centre |  | ZB5AD804 | ZB5AD804C0 | 0.017/0.037 |
| | Standard handle, yellow | 2 - stay put |  | ZB5AD205 | ZB5AD205C0 | 0.017/0.037 |
| | | 2 - spring return from right to left |  | ZB5AD405 | ZB5AD405C0 | 0.020/0.044 |
| | | 3 - stay put |  | ZB5AD305 | ZB5AD305 | 0.017/0.037 |
| | | 3 - spring return to centre |  | ZB5AD505 | ZB5AD505 | 0.017/0.037 |
| | | 3 - spring return from left to centre |  | ZB5AD705 | ZB5AD705 | 0.017/0.037 |
| | | 3 - spring return from right to centre |  | ZB5AD805 | ZB5AD805 | 0.017/0.037 |
| | Standard handle, blue | 2 - stay put |  | ZB5AD206 | ZB5AD206 | 0.017/0.037 |
| | | 2 - spring return from right to left |  | ZB5AD406 | ZB5AD406 | 0.020/0.044 |
| | | 3 - stay put |  | ZB5AD306 | ZB5AD306 | 0.017/0.037 |
| | | 3 - spring return to centre |  | ZB5AD506 | ZB5AD506 | 0.017/0.037 |
| | | 3 - spring return from left to centre |  | ZB5AD706 | ZB5AD706 | 0.017/0.037 |
| | | 3 - spring return from right to centre |  | ZB5AD806 | ZB5AD806 | 0.017/0.037 |
|  | Long handle, black | 2 - stay put |  | ZB5AJ2 | ZB5AJ2C0 | 0.017/0.037 |
| | | 2 - spring return from right to left |  | ZB5AJ4 | ZB5AJ4C0 | 0.020/0.044 |
| | | 3 - stay put |  | ZB5AJ3 | ZB5AJ3C0 | 0.017/0.037 |
| | | 3 - spring return to centre |  | ZB5AJ5 | ZB5AJ5C0 | 0.017/0.037 |
| | | 3 - spring return from left to centre |  | ZB5AJ7 | ZB5AJ7C0 | 0.017/0.037 |
| | | 3 - spring return from right to centre |  | ZB5AJ8 | ZB5AJ8C0 | 0.017/0.037 |



ZB5AJ

(1) Can only be used for actuation of end of row (side) mounted contacts.
 (2) For white color plated bezel replace C0 with C1, and for other color plated bezels using the web customization tool, see page 7.
 (3) To add customized markings on these references using the web customization tool, see page 7.



ZB5AD39



ZB5AG2



ZB5AG3

Heads for selector switches (1) (continued)

| Shape of head | Type of operator | Number and type of positions (2) | Reference | | Weight kg/lb |
|---------------|-------------------------------------|--|-----------------|------------------------|--------------|
| | | | For black bezel | For gray bezel (5) (6) | |
| | Knurled knob, black (4) | 2 - stay put | ZB5AD29 | ZB5AD29C0 | 0.020/0.044 |
| | | 2 - spring return from right to left | ZB5AD49 | ZB5AD49C0 | 0.024/0.053 |
| | | 3 - stay put | ZB5AD39 | ZB5AD39C0 | 0.020/0.044 |
| | | 3 - spring return to centre | ZB5AD59 | ZB5AD59C0 | 0.020/0.044 |
| | | 3 - spring return from left to centre | ZB5AD79 | ZB5AD79C0 | 0.020/0.044 |
| | | 3 - spring return from right to centre | ZB5AD89 | ZB5AD89C0 | 0.020/0.044 |
| | Key switch with key no. 455 (3) (4) | 2 - stay put | ZB5AG2 | ZB5AG2C0 | 0.057/0.126 |
| | | | ZB5AG02 | - | 0.057/0.126 |
| | | | ZB5AG4 | ZB5AG4C0 | 0.057/0.126 |
| | | 2 - spring return from right to left | ZB5AG6 | ZB5AG6C0 | 0.061/0.134 |
| | | 3 - stay put | ZB5AG0 | ZB5AG0C0 | 0.057/0.126 |
| | | | ZB5AG3 | ZB5AG3C0 | 0.057/0.126 |
| | | | ZB5AG5 | - | 0.057/0.126 |
| | | | ZB5AG9 | ZB5AG9C0 | 0.057/0.126 |
| | | | ZB5AG09 | - | 0.057/0.126 |
| | | 3 - spring return from left to centre | ZB5AG1 | - | 0.057/0.126 |
| | | 3 - spring return to centre | ZB5AG7 | ZB5AG7C0 | 0.057/0.126 |
| | | 3 - spring return from right to centre | ZB5AG8 | - | 0.057/0.126 |
| | ZB5AG05 | ZB5AG05C0 | 0.057/0.126 | | |
| | ZB5AG08 | ZB5AG08C0 | 0.057/0.126 | | |

(1) Can only be used for actuation of end of row (side) mounted contacts.

(2) The symbol "U" indicates key withdrawal position(s).

(3) Other key numbers:

- key no. 421E: add suffix 12 to the reference,
- key no. 458A: add suffix 10 to the reference,
- key no. 520E: add suffix 14 to the reference,
- key no. 3131A: add suffix 20 to the reference.

Example:

For a key switch head with key no. 421E, 2-position stay put with key withdrawal from the left-hand position, the reference becomes: **ZB5AG212**.

(4) For specific keys with other numbers, please consult our Customer Care Centre.

(5) For white color plated bezel replace C0 with C1, and for other color plated bezels using the web customization tool, see page 7.

(6) To add customized markings on these references using the web customization tool, see page 7.

Control stations and enclosures

Plastic control stations XALD and XALK

For Harmony XB5 control and signaling units Ø 22

Stations for customer assembly: heads



Heads for selector switches (1) (continued)

| Shape of head | Type of operator | Number and type of positions (2) | | Reference | | Weight kg/lb |
|--|-----------------------------|--|--------------|-----------------|------------------------|--------------|
| | | | | For black bezel | For gray bezel (3) (4) | |
| | Key switch with key no. 8D1 | 2 - stay put | | ZB5AG2D | ZB5AG2DC0 | 0.057/0.126 |
| | | | | ZB5AG02D | – | 0.057/0.126 |
| | | | | ZB5AG4D | ZB5AG4DC0 | 0.057/0.126 |
| | | 2 - spring return from right to left | | ZB5AG6D | – | 0.061/0.134 |
| | | | 3 - stay put | | ZB5AG0D | – |
| | | | | ZB5AG3D | – | 0.057/0.126 |
| | | | | ZB5AG5D | – | 0.057/0.126 |
| | | 3 - spring return from left to centre | | ZB5AG9D | – | 0.057/0.126 |
| | | | | ZB5AG09D | – | 0.057/0.126 |
| | | | | ZB5AG03D | – | 0.057/0.126 |
| | | | | ZB5AG04D | – | 0.057/0.126 |
| | | 3 - spring return from right to centre | | ZB5AG06D | – | 0.057/0.126 |
| | ZB5AG1D | | – | 0.057/0.126 | | |
| | ZB5AG07D | | – | 0.057/0.126 | | |
| 3 - spring return from right to centre | | ZB5AG8D | – | 0.057/0.126 | | |
| | | ZB5AG08D | – | 0.057/0.126 | | |
| | | ZB5AG05D | – | 0.057/0.126 | | |
| 3 - spring return to centre | | ZB5AG7D | – | 0.057/0.126 | | |

Heads for toggle switches

| Shape of head | Description | Lever | Type of position | Reference | | Weight kg/lb |
|---------------|-------------|----------|------------------|-----------------|------------------------|--------------|
| | | | | For black bezel | For gray bezel (3) (4) | |
| | 2-position | Black | Stay put | ZB5AD28 | ZB5AD28C0 | 0.023/0.051 |
| | | | Spring return | ZB5AD48 | ZB5AD48C0 | 0.023/0.051 |
| | White | Stay put | | ZB5AD2801 | ZB5AD2801C0 | 0.023/0.051 |
| | | | | ZB5AD2804 | ZB5AD2804C0 | 0.023/0.051 |
| | | | | ZB5AD2806 | ZB5AD2806C0 | 0.023/0.051 |
| | | | | | | |

(1) Can only be used for actuation of end of row (side) mounted contacts.

(2) The symbol "K" indicates key withdrawal position(s).

(3) For white color plated bezel replace C0 with C1, and for other color plated bezels using the web customization tool, see page 7.

(4) To add customized markings on these references using the web customization tool, see page 7.

Control stations and enclosures

Plastic control stations XALD and XALK

For Harmony XB5 control and signaling units Ø 22

Stations for customer assembly: heads



Heads for pilot lights

| Shape of head | For use with body comprising light source type | Color of lens | Reference | Weight kg/lb |
|---|--|---------------|-----------|--------------|
| With plain lens | | | | |
| | With integral LED Protected LED | White | ZB5AV013 | 0.017/0.037 |
| | | Green | ZB5AV033 | 0.017/0.037 |
| | | Red | ZB5AV043 | 0.017/0.037 |
| | | Orange | ZB5AV053 | 0.017/0.037 |
| | | Yellow | ZB5AV083 | 0.017/0.037 |
| | | Blue | ZB5AV063 | 0.017/0.037 |
| | With integral LED Protected LED | White | ZB5CV013 | 0.020/0.044 |
| | | Green | ZB5CV033 | 0.020/0.044 |
| | | Red | ZB5CV043 | 0.020/0.044 |
| | | Orange | ZB5CV053 | 0.020/0.044 |
| | | Blue | ZB5CV063 | 0.020/0.044 |
| | | 5 colors (1) | ZB5CV003 | 0.028/0.062 |
| With plain lens, for insertion of legend (2) | | | | |
| | With integral LED Protected LED | White | ZB5AV013E | 0.017/0.037 |
| | | Green | ZB5AV033E | 0.017/0.037 |
| | | Red | ZB5AV043E | 0.017/0.037 |
| | | Orange | ZB5AV053E | 0.017/0.037 |
| | | Yellow | ZB5AV083E | 0.017/0.037 |
| | | Blue | ZB5AV063E | 0.017/0.037 |
| With grooved lens (3) | | | | |
| | With integral LED Protected LED | White | ZB5AV013S | 0.017/0.037 |
| | | Green | ZB5AV033S | 0.017/0.037 |
| | | Red | ZB5AV043S | 0.017/0.037 |
| | | Orange | ZB5AV053S | 0.017/0.037 |
| | | Yellow | ZB5AV083S | 0.017/0.037 |
| | | Blue | ZB5AV063S | 0.017/0.037 |



Heads for spring return illuminated pushbuttons

| Shape of head | Type of push | Color | Reference | | Weight kg/lb |
|---|---|--------|-----------------|------------------------|--------------|
| | | | For black bezel | For gray bezel (4) (5) | |
| Only for use with bodies comprising a light source with integral LED | | | | | |
| | Flush, plain lens Protected LED | White | ZB5AW313 | ZB5AW313C0 | 0.017/0.037 |
| | | Green | ZB5AW333 | ZB5AW333C0 | 0.017/0.037 |
| | | Red | ZB5AW343 | ZB5AW343C0 | 0.017/0.037 |
| | | Orange | ZB5AW353 | ZB5AW353C0 | 0.017/0.037 |
| | | Yellow | ZB5AW383 | ZB5AW383C0 | 0.017/0.037 |
| | | Blue | ZB5AW363 | ZB5AW363C0 | 0.017/0.037 |
| | Flush, grooved lens (3) Protected LED | White | ZB5AW313S | ZB5AW313SC0 | 0.016/0.035 |
| | | Green | ZB5AW333S | ZB5AW333SC0 | 0.016/0.035 |
| | | Red | ZB5AW343S | ZB5AW343SC0 | 0.016/0.035 |
| | | Orange | ZB5AW353S | ZB5AW353SC0 | 0.016/0.035 |
| | | Yellow | ZB5AW383S | ZB5AW383SC0 | 0.016/0.035 |
| | | Blue | ZB5AW363S | ZB5AW363SC0 | 0.016/0.035 |
| | Flush for insertion of legend (1) Protected LED | White | ZB5AA18 | ZB5AA18C0 | 0.018/0.040 |
| | | Green | ZB5AA38 | ZB5AA38C0 | 0.018/0.040 |
| | | Red | ZB5AA48 | ZB5AA48C0 | 0.018/0.040 |
| | | Orange | ZB5AA58 | ZB5AA58C0 | 0.018/0.040 |
| | | Yellow | ZB5AA88 | ZB5AA88C0 | 0.018/0.040 |
| | | Blue | ZB5AA68 | ZB5AA68C0 | 0.018/0.040 |
| | Projecting Protected LED | White | ZB5AW113 | ZB5AW113C0 | 0.018/0.040 |
| | | Green | ZB5AW133 | ZB5AW133C0 | 0.018/0.040 |
| | | Red | ZB5AW143 | ZB5AW143C0 | 0.018/0.040 |
| | | Orange | ZB5AW153 | ZB5AW153C0 | 0.018/0.040 |
| | | Yellow | ZB5AW183 | ZB5AW153C0 | 0.018/0.040 |
| | | Blue | ZB5AW163 | ZB5AW163C0 | 0.018/0.040 |
| | Flush for insertion of legend (1) Protected LED | White | ZB5CW313 | – | 0.023/0.051 |
| | | Green | ZB5CW333 | – | 0.023/0.051 |
| | | Red | ZB5CW343 | – | 0.023/0.051 |
| | | Orange | ZB5CW353 | – | 0.023/0.051 |
| | | Blue | ZB5CW363 | – | 0.023/0.051 |

Other versions Heads for flush pushbuttons with illuminated ring. Please consult our Customer Care Centre.

(1) Head supplied with 5 different colored lenses (white, green, red, yellow, blue) for insertion of legend. For legend ordering information: see page 32.

(2) For legend ordering information: see page 32.

(3) For use in bright ambient light conditions (for example, outdoors in sunlight).

(4) For white color plated bezel replace C0 with C1, and for other color plated bezels using the web customization tool, see page 7.

(5) To add customized markings on these references using the web customization tool, see page 7.





Control stations and enclosures

Plastic control stations XALD and XALK

For Harmony XB5 control and signaling units Ø 22

Stations for customer assembly: heads

Heads for illuminated selector switches with standard handle (1)

| Shape of head | Number and type of positions | Color of handle | Reference | | Weight kg/lb |
|--|--|-----------------|-----------------|-----------------------|--------------|
| | | | For black bezel | For gray bezel (2)(3) | |
|  Only for use with bodies comprising a light source with integral LED | | | | | |
|  ZB5AK1263 | 2 - stay put | White | ZB5AK1213 | ZB5AK1213C0 | 0.016/0.035 |
| | | Green | ZB5AK1233 | ZB5AK1233C0 | 0.016/0.035 |
| | | Red | ZB5AK1243 | ZB5AK1243C0 | 0.016/0.035 |
| | | Orange | ZB5AK1253 | ZB5AK1253C0 | 0.016/0.035 |
| | | Yellow | ZB5AK1283 | ZB5AK1283C0 | 0.016/0.035 |
| | | Blue | ZB5AK1263 | ZB5AK1263C0 | 0.016/0.035 |
| | 2 - spring return from right to left | White | ZB5AK1413 | ZB5AK1413C0 | 0.017/0.037 |
| | | Green | ZB5AK1433 | ZB5AK1433C0 | 0.017/0.037 |
| | | Red | ZB5AK1443 | ZB5AK1443C0 | 0.017/0.037 |
| | | Orange | ZB5AK1453 | ZB5AK1453C0 | 0.017/0.037 |
|  ZB5AK1313 | 3 - stay put | White | ZB5AK1313 | ZB5AK1313C0 | 0.016/0.035 |
| | | Green | ZB5AK1333 | ZB5AK1333C0 | 0.016/0.035 |
| | | Red | ZB5AK1343 | ZB5AK1343C0 | 0.016/0.035 |
| | | Orange | ZB5AK1353 | ZB5AK1353C0 | 0.016/0.035 |
| | | Yellow | ZB5AK1383 | ZB5AK1383C0 | 0.016/0.035 |
| | | Blue | ZB5AK1363 | ZB5AK1363C0 | 0.016/0.035 |
| | 3 - spring return to centre | White | ZB5AK1513 | ZB5AK1513C0 | 0.016/0.035 |
| | | Green | ZB5AK1533 | ZB5AK1533C0 | 0.016/0.035 |
| | | Red | ZB5AK1543 | ZB5AK1543C0 | 0.016/0.035 |
| | | Orange | ZB5AK1553 | ZB5AK1553C0 | 0.016/0.035 |
|  ZB5AK1783 | 3 - spring return from right to centre | White | ZB5AK1813 | ZB5AK1813C0 | 0.016/0.035 |
| | | Green | ZB5AK1833 | ZB5AK1833C0 | 0.016/0.035 |
| | | Red | ZB5AK1843 | ZB5AK1843C0 | 0.016/0.035 |
| | | Orange | ZB5AK1853 | ZB5AK1853C0 | 0.016/0.035 |
| | | Yellow | ZB5AK1883 | ZB5AK1883C0 | 0.016/0.035 |
| | | Blue | ZB5AK1863 | ZB5AK1863C0 | 0.016/0.035 |
| 3 - spring return from left to centre | White | ZB5AK1713 | ZB5AK1713C0 | 0.016/0.035 | |
| | Green | ZB5AK1733 | ZB5AK1733C0 | 0.016/0.035 | |
| | Red | ZB5AK1743 | ZB5AK1743C0 | 0.016/0.035 | |
| | Orange | ZB5AK1753 | ZB5AK1753C0 | 0.016/0.035 | |
| | Yellow | ZB5AK1783 | ZB5AK1783C0 | 0.016/0.035 | |
| | Blue | ZB5AK1763 | ZB5AK1763C0 | 0.016/0.035 | |

(1) For recommended maximum number of contacts constituting the body (fixing collar and contact) associated with the head, see Harmony XB5 catalog, page 22.

(2) For white color plated bezel replace C0 with C1, and for other color plated bezels using the web customization tool, see page 7.



(3) To add customized markings on these references using the web customization tool, see page 7.

Control stations and enclosures

Plastic control stations XALD and XALK

For Harmony XB5 control and signaling units Ø 22

Stations for customer assembly: accessories



| 30 x 40 mm legend holders (flush mounting with bezel) for 8 x 27 mm legends (1) | | | | | | |
|---|---|----------------------|------------------------|-----------------|------------------------|--------------|
| Description | Legend | | Sold in lots of | Unit reference | | Weight kg/lb |
| | Background color | | | | | |
| Without legend | - | | 10 | ZBZ34 | - | 0.003/0.007 |
| With blank legend | Black or red | | 10 | ZBY2H101 | - | 0.004/0.009 |
| | White or yellow | | 10 | ZBY4H101 | - | 0.004/0.009 |
| With blank legend for square heads | | | 10 | ZBCZ34 | - | 0.002/0.004 |
| | Black or red background | | 10 | ZBCY2H101 | - | 0.002/0.004 |
| | White or yellow background | | 10 | ZBCY4H101 | - | 0.002/0.004 |
| Standard 30 x 40 mm legend holders for 8 x 27 mm legends (1) | | | | | | |
| Description | Legend | | Sold in lots of | Unit reference | | Weight kg/lb |
| | Color | Marking | | For black bezel | For gray bezel (4) (5) | |
| Without legend | - | | 10 | ZBZ32 | ZBZ32C0 | 0.001/0.002 |
| With blank legend (for engraving) | Black or red | | 10 | ZBY2101 | ZBY2101C0 | 0.002/0.004 |
| | White or yellow | | 10 | ZBY4101 | ZBY4101C0 | 0.002/0.004 |
| With 8 x 27 mm/ 0.315 x 1.063 in. legend (with international marking) | Black or red (2) | O (black background) | 10 | ZBY2146 | - | 0.002/0.004 |
| | | O (red background) | 10 | ZBY2931 | - | 0.002/0.004 |
| | I | | 10 | ZBY2147 | - | 0.002/0.004 |
| | | | 10 | ZBY2148 | - | 0.002/0.004 |
| | O-I | | 10 | ZBY2178 | ZBY2178C0 | 0.002/0.004 |
| | | | 10 | ZBY2179 | - | 0.002/0.004 |
| | I-II | | 10 | ZBY2186 | ZBY2186C0 | 0.002/0.004 |
| | | | 10 | ZBY2115 | - | 0.002/0.004 |
| | I-O-II | | 10 | ZBY2186 | ZBY2186C0 | 0.002/0.004 |
| | | | 10 | ZBY2304 | ZBY2304C0 | 0.002/0.004 |
| | Yellow | | 10 | ZBY4140 (3) | - | 0.002/0.004 |
| | | | | | | |
| | With 8 x 27 mm/ 0.315 x 1.063 in. legend (with French language marking) | Black or red (2) | ARRET (red background) | 10 | ZBY2104 | ZBY2104C0 |
| ARRET (black background) | | | 10 | ZBY0104 | - | 0.002/0.004 |
| ARRET GENERAL | | | 10 | ZBY2129 | - | 0.002/0.004 |
| ARRET REARMEMENT | | | 10 | ZBY2133 | - | 0.002/0.004 |
| ARRET-MARCHE | | | 10 | ZBY2166 | ZBY2166C0 | 0.002/0.004 |
| ARRIERE | | | 10 | ZBY2106 | - | 0.002/0.004 |
| AUTO CYCLE-CYCLE | | | 10 | ZBY2198 | - | 0.002/0.004 |
| AUTO CYCLE-MAIN | | | 10 | ZBY2199 | - | 0.002/0.004 |
| AUTO-MAIN | | | 10 | ZBY2164 | - | 0.002/0.004 |
| AUTO-O-MAIN | | | 10 | ZBY2185 | - | 0.002/0.004 |
| AVANT | | | 10 | ZBY2105 | - | 0.002/0.004 |
| AVANT-O-ARRIERE | | | 10 | ZBY2184 | - | 0.002/0.004 |
| C-P-C-NORMAL | | | 10 | ZBY2165 | - | 0.002/0.004 |
| CYCLE-MAIN | | | 10 | ZBY2197 | - | 0.002/0.004 |
| DECLENCHEMENT | | | 10 | ZBY2132 | - | 0.002/0.004 |
| DEFAULT (black background) | | | 10 | ZBY2134 | - | 0.002/0.004 |
| DEFAULT (red background) | | | 10 | ZBY2135 | - | 0.002/0.004 |
| DEPART CYCLE | | | 10 | ZBY2195 | - | 0.002/0.004 |
| DESCENTE | | | 10 | ZBY2108 | - | 0.002/0.004 |
| DROITE | | | 10 | ZBY2109 | - | 0.002/0.004 |
| ENCLENCHEMENT | | | 10 | ZBY2131 | - | 0.002/0.004 |
| EN SERVICE | | | 10 | ZBY2111 | - | 0.002/0.004 |
| FERMETURE | | | 10 | ZBY2114 | - | 0.002/0.004 |
| GAUCHE | | | 10 | ZBY2110 | - | 0.002/0.004 |
| HORS SERVICE | | | 10 | ZBY2112 | - | 0.002/0.004 |
| HORS-EN | | | 10 | ZBY2167 | - | 0.002/0.004 |
| LENT | | | 10 | ZBY2127 | - | 0.002/0.004 |
| MAIN | | | 10 | ZBY2116 | - | 0.002/0.004 |
| MARCHE | | | 10 | ZBY2103 | ZBY2103C0 | 0.002/0.004 |
| MONTEE | | | 10 | ZBY2107 | - | 0.002/0.004 |
| OUVERTURE | 10 | ZBY2113 | - | 0.002/0.004 | | |
| PHASE/PHASE | 10 | ZBY2196 | - | 0.002/0.004 | | |
| REARMEMENT (red background) | 10 | ZBY2123 | - | 0.002/0.004 | | |
| REARMEMENT (black background) | 10 | ZBY0123 | - | 0.002/0.004 | | |
| SOUS TENSION | 10 | ZBY2126 | - | 0.002/0.004 | | |
| VITE | 10 | ZBY2128 | - | 0.002/0.004 | | |
| Red | ARRET D'URGENCE | 10 | ZBY2130 (3) | - | 0.002/0.004 | |

(1) For legends, see pages 31 to 32.

(2) "Start" functions: white letters on black background. "Stop" functions: white letters on red background (unless otherwise specified above).

(3) For compliance with standard EN/ISO 13850, paragraph 4.4.6, the Emergency Stop function logo  has been added.

(4) For white color plated bezel replace C0 with C1, and for other color plated bezels using the web customization tool, see page 7.

(5) To add customized markings on these references using the web customization tool, see page 7.

Control stations and enclosures

Plastic control stations XALD and XALK

For Harmony XB5 control and signaling units Ø 22

Stations for customer assembly: accessories


| Standard 30 x 40 mm legend holders with 8 x 27 mm legends (continued) | | | | | | |
|---|-----------------------------|--------------------------|-----------------|-----------------|------------------------|--------------|
| Description | Legend | | Sold in lots of | Reference | | Weight kg/lb |
| | Color | Marking | | For black bezel | For gray bezel (3) (4) | |
| With legend (with English language marking) | Black or red background (1) | AUTO-HAND | 10 | ZBY2364 | – | 0.002/0.004 |
| | | AUTO-O-HAND | 10 | ZBY2385 | – | 0.002/0.004 |
| | | CLOSE | 10 | ZBY2314 | – | 0.002/0.004 |
| | | DOWN | 10 | ZBY2308 | – | 0.002/0.004 |
| | | FAST | 10 | ZBY2328 | – | 0.002/0.004 |
| | | FORWARD | 10 | ZBY2305 | – | 0.002/0.004 |
| | | HAND | 10 | ZBY2316 | – | 0.002/0.004 |
| | | HAND-OFF-AUTO | 10 | ZBY2387 | – | 0.002/0.004 |
| | | INCH | 10 | ZBY2321 | – | 0.002/0.004 |
| | | LEFT | 10 | ZBY2310 | – | 0.002/0.004 |
| | | OFF | 10 | ZBY2312 | – | 0.002/0.004 |
| | | OFF-ON | 10 | ZBY2367 | ZBY2367C0 | 0.002/0.004 |
| | | ON | 10 | ZBY2311 | – | 0.002/0.004 |
| | | OPEN | 10 | ZBY2313 | – | 0.002/0.004 |
| | | POWER ON | 10 | ZBY2326 | – | 0.002/0.004 |
| | | RESET (red background) | 10 | ZBY2323 | – | 0.002/0.004 |
| | | RESET (black background) | 10 | ZBY2322 | – | 0.002/0.004 |
| | | REVERSE | 10 | ZBY2306 | – | 0.002/0.004 |
| | | RIGHT | 10 | ZBY2309 | – | 0.002/0.004 |
| | | RUN | 10 | ZBY2334 | – | 0.002/0.004 |
| | | SLOW | 10 | ZBY2327 | – | 0.002/0.004 |
| | | START | 10 | ZBY2303 | ZBY2303C0 | 0.002/0.004 |
| | | STOP-START | 10 | ZBY2366 | – | 0.002/0.004 |
| | | UP | 10 | ZBY2307 | – | 0.002/0.004 |
| With legend (with German language marking) | Black or red background (1) | EMERGENCY STOP | 10 | ZBY2330 (2) | – | 0.002/0.004 |
| | | AB | 10 | ZBY2208 | – | 0.002/0.004 |
| | | AUF | 10 | ZBY2207 | – | 0.002/0.004 |
| | | AUS | 10 | ZBY2204 | – | 0.002/0.004 |
| | | AUS-EIN | 10 | ZBY2266 | – | 0.002/0.004 |
| | | AUS-IN BETRIEB | 10 | ZBY2267 | – | 0.002/0.004 |
| | | AUS-RÜCKSTELLUNG | 10 | ZBY2233 | – | 0.002/0.004 |
| | | AUSSCHALTEN | 10 | ZBY2232 | – | 0.002/0.004 |
| | | AUTO-HAND | 10 | ZBY2364 | – | 0.002/0.004 |
| | | AUTO-O-HAND | 10 | ZBY2385 | – | 0.002/0.004 |
| | | AUTOZYKL-HAND | 10 | ZBY2299 | – | 0.002/0.004 |
| | | AUTOZYKL- 1 ZYKL | 10 | ZBY2298 | – | 0.002/0.004 |
| | | C-P-C-NORMAL | 10 | ZBY2265 | – | 0.002/0.004 |
| | | EIN | 10 | ZBY2203 | – | 0.002/0.004 |
| | | EINSCHALTEN | 10 | ZBY2231 | – | 0.002/0.004 |
| | | HAND | 10 | ZBY2316 | – | 0.002/0.004 |
| | | LANGSAM | 10 | ZBY2227 | – | 0.002/0.004 |
| | | LINKS | 10 | ZBY2210 | – | 0.002/0.004 |
| | | NOT-AUS (red background) | 10 | ZBY2230 | – | 0.002/0.004 |
| | | ÖFFNEN | 10 | ZBY2213 | – | 0.002/0.004 |
| | | RECHTS | 10 | ZBY2209 | – | 0.002/0.004 |
| | | RÜCKSTELLUNG | 10 | ZBY2223 | – | 0.002/0.004 |
| | | SCHLIESSEN | 10 | ZBY2214 | – | 0.002/0.004 |
| | | SCHNELL | 10 | ZBY2228 | – | 0.002/0.004 |
| SPANNUNG EIN | 10 | ZBY2226 | – | 0.002/0.004 | | |
| STEUERUNG AUS | 10 | ZBY2212 | – | 0.002/0.004 | | |
| STEUERUNG EIN | 10 | ZBY2211 | – | 0.002/0.004 | | |
| STÖRUNG (black background) | 10 | ZBY2234 | – | 0.002/0.004 | | |
| STÖRUNG (red background) | 10 | ZBY2235 | – | 0.002/0.004 | | |
| VOR | 10 | ZBY2205 | – | 0.002/0.004 | | |
| VOR-O-ZURÜCK | 10 | ZBY2284 | – | 0.002/0.004 | | |
| ZURÜCK | 10 | ZBY2206 | – | 0.002/0.004 | | |
| ZYKLUS-HAND | 10 | ZBY2297 | – | 0.002/0.004 | | |
| ZYKLUSSTART | 10 | ZBY2295 | – | 0.002/0.004 | | |
| Red background | NOT-HALT | 10 | ZBY2229 (2) | – | 0.002/0.004 | |
| Yellow background | NOT-HALT | 10 | ZBY22420001 (2) | – | 0.002/0.004 | |

(1) "Start" functions: white letters on black background. "Stop" functions: white letters on red background (unless otherwise specified above).

(2) For compliance with standard EN/ISO 13850, paragraph 4.4.6, the Emergency Stop function logo  has been added.

(3) For white color plated bezel replace C0 with C1, and for other color plated bezels using the web customization tool, see page 7.

(4) To add customized markings on these references using the web customization tool, see page 7.




ZBY2303



ZBY2228

522035



ZALY4

| Legends (30 x 42 mm) for engraving | | | | |
|--|---------------------|-----------------|----------------|--------------|
| Description | Color of background | Sold in lots of | Unit reference | Weight kg/lb |
| Legends for engraving 2 lines of text | Black or red | 10 | ZALY2 | 0.001/0.002 |
| | White or yellow | 10 | ZALY4 | 0.001/0.002 |

| Legends (8 x 27 mm) for engraving | | | | |
|---|---------------------|-----------------|----------------|--------------|
| For use with | Color of background | Sold in lots of | Unit reference | Weight kg/lb |
| 30 x 40 mm/1.181 x 1.575 in. legend holder | Black or red | 10 | ZBY0101 | 0.001/0.002 |
| | White or yellow | 10 | ZBY0102 | 0.001/0.002 |
| | Yellow | 10 | ZBY0140 (1) | 0.001/0.002 |

| Sheets of 76 (8 x 27 mm) peel-off legends | | | | |
|---|---|-----------------|----------------|--------------|
| For use with | Supplied with | Sold in lots of | Unit reference | Weight kg/lb |
| 30 x 40 mm/1.181 x 1.575 in. legend holders ZBZ32 and ZBZ34 | Backing board and protective transparent cover | 10 | ZBY4100 | 0.043/0.095 |

| 8 x 27 mm marked legends (for 30 x 40 mm legend holders ZBZ32 and ZBZ34) | | | | |
|--|---------------------|----------------------|-----------|--------------|
| Language | Color of background | Marking | Reference | Weight kg/lb |
| International | Black or red (2) | O (black background) | ZBY02146 | 0.001/0.002 |
| | | O (red background) | ZBY02931 | 0.001/0.002 |
| | | I | ZBY02147 | 0.001/0.002 |
| | | II | ZBY02148 | 0.001/0.002 |
| | | O-I | ZBY02178 | 0.001/0.002 |
| | | I-II | ZBY02179 | 0.001/0.002 |
| | | I-O-II | ZBY02186 | 0.001/0.002 |
| | | AUTO | ZBY02115 | 0.001/0.002 |
| | | STOP | ZBY02304 | 0.001/0.002 |

| | | | | | |
|--------|------------------|-------------------------------|-----------------|--------------|-------------|
| French | Black or red (2) | ARRET (red background) | ZBY02104 | 0.001/0.002 | |
| | | ARRET (black background) | ZBY00104 | 0.001/0.002 | |
| | | ARRET GENERAL | ZBY02129 | 0.001/0.002 | |
| | | ARRET REARMEMENT | ZBY02133 | 0.001/0.002 | |
| | | ARRET-MARCHE | ZBY02166 | 0.001/0.002 | |
| | | ARRIERE | ZBY02106 | 0.001/0.002 | |
| | | AUTO CYCLE-CYCLE | ZBY02198 | 0.001/0.002 | |
| | | AUTO CYCLE-MAIN | ZBY02199 | 0.001/0.002 | |
| | | AUTO-MAIN | ZBY02164 | 0.001/0.002 | |
| | | AUTO-O-MAIN | ZBY02185 | 0.001/0.002 | |
| | | AVANT | ZBY02105 | 0.001/0.002 | |
| | | AVANT-O-ARRIERE | ZBY02184 | 0.001/0.002 | |
| | | C-P-C-NORMAL | ZBY02165 | 0.001/0.002 | |
| | | CYCLE-MAIN | ZBY02197 | 0.001/0.002 | |
| | | DECLenchement | ZBY02132 | 0.001/0.002 | |
| | | DEFAULT (black background) | ZBY02134 | 0.001/0.002 | |
| | | DEFAULT (red background) | ZBY02135 | 0.001/0.002 | |
| | | DEPART CYCLE | ZBY02195 | 0.001/0.002 | |
| | | DESCENTE | ZBY02108 | 0.001/0.002 | |
| | | DROITE | ZBY02109 | 0.001/0.002 | |
| | | ENCLenchement | ZBY02131 | 0.001/0.002 | |
| | | EN SERVICE | ZBY02111 | 0.001/0.002 | |
| | | FERMETURE | ZBY02114 | 0.001/0.002 | |
| | | GAUCHE | ZBY02110 | 0.001/0.002 | |
| | | HORS SERVICE | ZBY02112 | 0.001/0.002 | |
| | | HORS-EN | ZBY02167 | 0.001/0.002 | |
| | | LENT | ZBY02127 | 0.001/0.002 | |
| | | MAIN | ZBY02116 | 0.001/0.002 | |
| | | MARCHE | ZBY02103 | 0.001/0.002 | |
| | | MONTEE | ZBY02107 | 0.001/0.002 | |
| | | OUVERTURE | ZBY02113 | 0.001/0.002 | |
| | | PHASE / PHASE | ZBY02196 | 0.001/0.002 | |
| | | REARMEMENT (red background) | ZBY02123 | 0.001/0.002 | |
| | | REARMEMENT (black background) | ZBY00123 | 0.001/0.002 | |
| | | SOUS TENSION | ZBY02126 | 0.001/0.002 | |
| | | VITE | ZBY02128 | 0.001/0.002 | |
| | | Red | ARRET D'URGENCE | ZBY02130 (1) | 0.001/0.002 |

(1) For compliance with standard EN/ISO 13850, paragraph 4.4.6, the Emergency Stop function logo (⊞) has been added.

(2) "Start" functions: white characters on black background. "Stop" functions: white characters on red background (unless otherwise stated above).

816339



ZBY02178

816340



ZBY02104

Control stations and enclosures

Plastic control stations XALD and XALK

For Harmony XB5 control and signaling units Ø 22

Stations for customer assembly: accessories

8 x 27 mm marked legends (for 30 x 40 mm legend holders ZBZ32 and ZBZ34) (continued) (3)

| Language | Color of background | Marking | Reference | Weight kg/lb | | |
|----------|---------------------|----------------------------|-----------|-----------------|------------------|-------------|
| English | Black or red (1) | AUTO-HAND | ZBY02364 | 0.001/0.002 | | |
| | | AUTO-O-HAND | ZBY02385 | 0.001/0.002 | | |
| | | CLOSE | ZBY02314 | 0.001/0.002 | | |
| | | DOWN | ZBY02308 | 0.001/0.002 | | |
| | | FAST | ZBY02328 | 0.001/0.002 | | |
| | | FORWARD | ZBY02305 | 0.001/0.002 | | |
| | | HAND | ZBY02316 | 0.001/0.002 | | |
| | | HAND-OFF-AUTO | ZBY02387 | 0.001/0.002 | | |
| | | INCH | ZBY02321 | 0.001/0.002 | | |
| | | LEFT | ZBY02310 | 0.001/0.002 | | |
| | | OFF | ZBY02312 | 0.001/0.002 | | |
| | | OFF-ON | ZBY02367 | 0.001/0.002 | | |
| | | ON | ZBY02311 | 0.001/0.002 | | |
| | | OPEN | ZBY02313 | 0.001/0.002 | | |
| | | POWER ON | ZBY02326 | 0.001/0.002 | | |
| | | RESET (red background) | ZBY02323 | 0.001/0.002 | | |
| | | RESET (black background) | ZBY02322 | 0.001/0.002 | | |
| | | REVERSE | ZBY02306 | 0.001/0.002 | | |
| | | RIGHT | ZBY02309 | 0.001/0.002 | | |
| | | RUN | ZBY02334 | 0.001/0.002 | | |
| | | SLOW | ZBY02327 | 0.001/0.002 | | |
| | | START | ZBY02303 | 0.001/0.002 | | |
| | | STOP-START | ZBY02366 | 0.001/0.002 | | |
| | | UP | ZBY02307 | 0.001/0.002 | | |
| | | | Red | EMERGENCY STOP | ZBY02330 (2) | 0.001/0.002 |
| German | Black or red (1) | AB | ZBY02208 | 0.001/0.002 | | |
| | | AUF | ZBY02207 | 0.001/0.002 | | |
| | | AUS | ZBY02204 | 0.001/0.002 | | |
| | | AUS-EIN | ZBY02266 | 0.001/0.002 | | |
| | | AUS-IN BETRIEB | ZBY02267 | 0.001/0.002 | | |
| | | AUS-RUCKSTELLUNG | ZBY02233 | 0.001/0.002 | | |
| | | AUSSCHALLEN | ZBY02232 | 0.001/0.002 | | |
| | | AUTO-HAND | ZBY02364 | 0.001/0.002 | | |
| | | AUTO-O-HAND | ZBY02385 | 0.001/0.002 | | |
| | | AUTOZYKL-HAND | ZBY02299 | 0.001/0.002 | | |
| | | AUTOZYKL- 1 ZYKL | ZBY02298 | 0.001/0.002 | | |
| | | C-P-C-NORMAL | ZBY02265 | 0.001/0.002 | | |
| | | EIN | ZBY02203 | 0.001/0.002 | | |
| | | EINSCHALTEN | ZBY02231 | 0.001/0.002 | | |
| | | HAND | ZBY02316 | 0.001/0.002 | | |
| | | LANGSAM | ZBY02227 | 0.001/0.002 | | |
| | | LINKS | ZBY02210 | 0.001/0.002 | | |
| | | NOT-AUS (red background) | ZBY02230 | 0.001/0.002 | | |
| | | ÖFFNEN | ZBY02213 | 0.001/0.002 | | |
| | | RECHTS | ZBY02209 | 0.001/0.002 | | |
| | | RUCKSTELLUNG | ZBY02223 | 0.001/0.002 | | |
| | | SCHLIESSEN | ZBY02214 | 0.001/0.002 | | |
| | | SCHNELL | ZBY02228 | 0.001/0.002 | | |
| | | SPANNUNG EIN | ZBY02226 | 0.001/0.002 | | |
| | | STEUERUNG AUS | ZBY02212 | 0.001/0.002 | | |
| | | STEUERUNG EIN | ZBY02211 | 0.001/0.002 | | |
| | | STORUNG (black background) | ZBY02234 | 0.001/0.002 | | |
| | | STORUNG (red background) | ZBY02235 | 0.001/0.002 | | |
| | | VOR | ZBY02205 | 0.001/0.002 | | |
| | | VOR-O-ZURUCK | ZBY02284 | 0.001/0.002 | | |
| | | ZURUCK | ZBY02206 | 0.001/0.002 | | |
| | | ZYKLUS-HAND | ZBY02297 | 0.001/0.002 | | |
| | | ZYKLUS-START | ZBY02295 | 0.001/0.002 | | |
| | | | Red | NOT-HALT | ZBY02229 (2) | 0.001/0.002 |
| | | | Yellow | NOT-HALT | ZBY022420001 (2) | 0.001/0.002 |

(1) "Start" functions: white characters on black background. "Stop" functions: white characters on red background (unless otherwise stated above).

(2) For compliance with standard EN/ISO 13850, paragraph 4.4.6, the Emergency Stop function logo  has been added.

(3) To add customized markings on these references using the web customization tool, see page 7.

816341

START

ZBY02303

816342

SCHNELL

ZBY02228


Control stations and enclosures

Plastic control stations XALD and XALK

For Harmony XB5 control and signaling units Ø 22

Stations for customer assembly: accessories

8115344

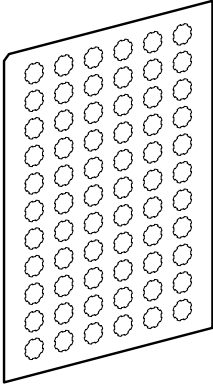

ZBY1●●●

Legends for pushbuttons, switches and pilot lights XB5A

| Description | Marking | Sold in lots of | Unit reference | Weight kg/lb | | |
|--|---------------|-----------------|----------------|--------------|-------------|-------------|
| Sheets of 66 circular peel-off transparent self-adhesive legends | Without | 10 | ZBY1101 | 0.017/0.037 | | |
| | International | O | 10 | ZBY1146 | 0.017/0.037 | |
| | | I | 10 | ZBY1147 | 0.017/0.037 | |
| | | II | 10 | ZBY1148 | 0.017/0.037 | |
| | | III | 10 | ZBY1149 | 0.017/0.037 | |
| | | AUTO | 10 | ZBY1115 | 0.017/0.037 | |
| | | STOP | 10 | ZBY1304 | 0.017/0.037 | |
| | | † | 10 | ZBY1912 | 0.017/0.037 | |
| | | French | ARRET | 10 | ZBY1104 | 0.017/0.037 |
| | | | ARRIERE | 10 | ZBY1106 | 0.017/0.037 |
| | | | AVANT | 10 | ZBY1105 | 0.017/0.037 |
| | AUTO | | 10 | ZBY1115 | 0.017/0.037 | |
| | DESCENTE | | 10 | ZBY1108 | 0.017/0.037 | |
| | MAIN | | 10 | ZBY1116 | 0.017/0.037 | |
| | MARCHE | | 10 | ZBY1103 | 0.017/0.037 | |
| | MONTEE | | 10 | ZBY1107 | 0.017/0.037 | |
| | English | HAND | 10 | ZBY1316 | 0.017/0.037 | |
| | | OFF | 10 | ZBY1312 | 0.017/0.037 | |
| | | ON | 10 | ZBY1311 | 0.017/0.037 | |
| | | START | 10 | ZBY1303 | 0.017/0.037 | |
| German | AB | 10 | ZBY1208 | 0.017/0.037 | | |
| | AUF | 10 | ZBY1207 | 0.017/0.037 | | |
| | AUS | 10 | ZBY1204 | 0.017/0.037 | | |
| | EIN | 10 | ZBY1203 | 0.017/0.037 | | |
| | ZU | 10 | ZBY1214 | 0.017/0.037 | | |
| Strip of 66 square peel-off transparent self-adhesive legends | Without | 10 | ZBCY1101 | 0.017/0.037 | | |

Circular yellow legends for mushroom head pushbuttons

Used for "Emergency stop" function (1)

| Diameter mm/in. | Conforming to standards | Marking on yellow background | Unit reference | Weight kg/lb |
|-----------------|---------------------------------|------------------------------|----------------|--------------|
| 60/2.362 (2) | EN/IEC 60204-1 and EN/ISO 13850 | – | ZBY9121 | 0.004/0.009 |
| | | ARRET D'URGENCE | ZBY9120 | 0.004/0.009 |
| | | EMERGENCY STOP | ZBY9320 | 0.004/0.009 |
| | | NOT-HALT | ZBY9220 | 0.004/0.009 |
| | | PARADA DI EMERGENCIA | ZBY9420 | 0.004/0.009 |
| | | ARRESTO DE EMERGENZA | ZBY9620 | 0.004/0.009 |

Used for "Emergency switching off" function

| | | | | |
|----------|----------------|---------------------------|---------|-------------|
| 60/2.362 | EN/IEC 60204-1 | – | ZBY9101 | 0.004/0.009 |
| | | COUPURE D'URGENCE | ZBY9160 | 0.004/0.009 |
| | | EMERGENCY SWITCHING OFF | ZBY9360 | 0.004/0.009 |
| | | NOT-AUS | ZBY9260 | 0.004/0.009 |
| | | DESCONEXION DE EMERGENCIA | ZBY9460 | 0.004/0.009 |
| | | INTERRUZIONE DI EMERGENZA | ZBY9660 | 0.004/0.009 |

(1) For compliance with standard EN/ISO 13850, paragraph 4.4.6, the Emergency Stop function logo  has been added.



ZBY9160


Control stations and enclosures

Plastic control stations XALD and XALK

For Harmony XB5 control and signaling units Ø 22


Stations for customer assembly: accessories

| Illuminated rings for Emergency stop (1) (2) | | | | | | | |
|---|----------------------|------------|----------------|--------|-------------------|-------------------|--------------|
| Description | Marking | Signaling | Supply voltage | Color | Sold in lots of | Reference | Weight kg/lb |
| Ø 60 mm/2.362 in. illuminated ring for Emergency stop | EMERGENCY STOP | Fixed, red | 24 V ~ | Yellow | 1 | ZBY9W2B330 | 0.031/0.068 |
| | ARRET D'URGENCE | Fixed, red | 24 V ~ | Yellow | 1 | ZBY9W2B130 | 0.031/0.068 |
| | NOT HALT | Fixed, red | 24 V ~ | Yellow | 1 | ZBY9W2B230 | 0.031/0.068 |
| | PARADA DE EMERGENCIA | Fixed, red | 24 V ~ | Yellow | 1 | ZBY9W2B430 | 0.031/0.068 |
| | ARRESTO DI EMERGENZA | Fixed, red | 24 V ~ | Yellow | 1 | ZBY9W2B630 | 0.031/0.068 |
| | - | Fixed, red | 24 V ~ | Yellow | 1 | ZBY9W2B140 | 0.031/0.068 |
| | EMERGENCY STOP | Fixed, red | 120 V ~ | Yellow | 1 | ZBY9W2G330 | 0.031/0.068 |
| | ARRET D'URGENCE | Fixed, red | 120 V ~ | Yellow | 1 | ZBY9W2G130 | 0.031/0.068 |
| | NOT HALT | Fixed, red | 120 V ~ | Yellow | 1 | ZBY9W2G230 | 0.031/0.068 |
| | PARADA DE EMERGENCIA | Fixed, red | 120 V ~ | Yellow | 1 | ZBY9W2G430 | 0.031/0.068 |
| | ARRESTO DI EMERGENZA | Fixed, red | 120 V ~ | Yellow | 1 | ZBY9W2G630 | 0.031/0.068 |
| | - | Fixed, red | 120 V ~ | Yellow | 1 | ZBY9W2G140 | 0.031/0.068 |
| | EMERGENCY STOP | Fixed, red | 230 V ~ | Yellow | 1 | ZBY9W2M330 | 0.031/0.068 |
| | ARRET D'URGENCE | Fixed, red | 230 V ~ | Yellow | 1 | ZBY9W2M130 | 0.031/0.068 |
| | NOT HALT | Fixed, red | 230 V ~ | Yellow | 1 | ZBY9W2M230 | 0.031/0.068 |
| | PARADA DE EMERGENCIA | Fixed, red | 230 V ~ | Yellow | 1 | ZBY9W2M430 | 0.031/0.068 |
| ARRESTO DI EMERGENZA | Fixed, red | 230 V ~ | Yellow | 1 | ZBY9W2M630 | 0.031/0.068 | |
| - | Fixed, red | 230 V ~ | Yellow | 1 | ZBY9W2M140 | 0.031/0.068 | |
| EMERGENCY STOP | Fixed, red + white | 24 V ~ | Yellow | 1 | ZBY9W3B330 | 0.031/0.068 | |
| ARRET D'URGENCE | Fixed, red + white | 24 V ~ | Yellow | 1 | ZBY9W3B130 | 0.031/0.068 | |
| NOT HALT | Fixed, red + white | 24 V ~ | Yellow | 1 | ZBY9W3B230 | 0.031/0.068 | |
| PARADA DE EMERGENCIA | Fixed, red + white | 24 V ~ | Yellow | 1 | ZBY9W3B430 | 0.031/0.068 | |
| ARRESTO DI EMERGENZA | Fixed, red + white | 24 V ~ | Yellow | 1 | ZBY9W3B630 | 0.031/0.068 | |
| - | Fixed, red + white | 24 V ~ | Yellow | 1 | ZBY9W3B140 | 0.031/0.068 | |



(1) For compliance with standard EN/ISO 13850, paragraph 4.4.6, the Emergency Stop function logo  has been added.

(2) Compatible only with XALKW01.



ZBZ160●

XB5_633_CFOODA01602Z
ZBZ1605XB4_632_CPFJR16307
ZBY9330MXB4_632_CPFJR16267
ZBY9360M

Accessories for mushroom head pushbuttons (continued)

| Description | Exclusive use with the following Ø 40 mm/1.575 in. trigger action pushbuttons | Color | Reference | Weight kg/lb |
|---|---|-----------------|----------------|--------------|
| Metal guards for Emergency stop function, padlockable (1) | XB5AT8● XB5AS8● XB5AS9● ZB5AT8● ZB5AS8● ZB5AS9● | Chromium plated | ZBZ1600 | 0.046/0.101 |
| | | Black | ZBZ1602 | 0.046/0.101 |
| | | Red | ZBZ1604 | 0.046/0.101 |
| | | Yellow | ZBZ1605 | 0.046/0.101 |
| | | Blue | ZBZ1606 | 0.046/0.101 |

Circular yellow legends for metal guard ZBZ16●● (2)

| Description | Marking | Color | Sold in lots of | Reference | Weight kg/lb |
|--|---------------------------|--------|-----------------|-----------------|--------------|
| For Emergency stop function | | | | | |
| Ø 60 mm/2.362 in. legend for metal guard ZBZ16●● | Without | Yellow | 10 | ZBY9140M | 0.004/0.009 |
| | ARRET D'URGENCE | Yellow | 10 | ZBY9130M | 0.004/0.009 |
| | EMERGENCY STOP | Yellow | 10 | ZBY9330M | 0.004/0.009 |
| | NOT-HALT | Yellow | 10 | ZBY9230M | 0.004/0.009 |
| | PARADA DE EMERGENZA | Yellow | 10 | ZBY9430M | 0.004/0.009 |
| | NOODSTOP | Yellow | 10 | ZBY9530M | 0.004/0.009 |
| | ARRESTO DI EMERGENZA | Yellow | 10 | ZBY9630M | 0.004/0.009 |
| | NODSTOPP | Yellow | 10 | ZBY9730M | 0.004/0.009 |
| | NODSTOP | Yellow | 10 | ZBY9830M | 0.004/0.009 |
| For Emergency switching off function | | | | | |
| Ø 60 mm/2.362 in. legend for metal guard ZBZ16●● | Without | Yellow | 10 | ZBY9101M | 0.004/0.009 |
| | COUPURE D'URGENCE | Yellow | 10 | ZBY9160M | 0.004/0.009 |
| | EMERGENCY SWITCHING OFF | Yellow | 10 | ZBY9360M | 0.004/0.009 |
| | NOT-AUS | Yellow | 10 | ZBY9260M | 0.004/0.009 |
| | DESCONEXION DE EMERGENCIA | Yellow | 10 | ZBY9460M | 0.004/0.009 |
| | INTERRUZIONE DI EMERGENZA | Yellow | 10 | ZBY9660M | 0.004/0.009 |

(1) No isolation function is possible when this guard is fitted.


(2) To add customized markings on these references through web customization tool, see page 7.

Control stations and enclosures

Plastic control stations XALD and XALK

For Harmony XB5 control and signaling units Ø 22

Stations for customer assembly: accessories

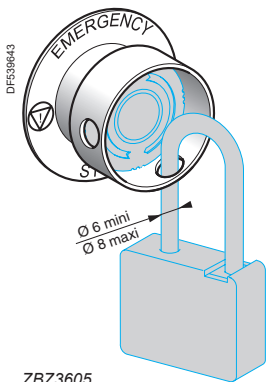

Accessories for mushroom head pushbuttons (5)

| Description | Exclusive use with the following Ø 40 mm/1.575 in. trigger action pushbuttons | Color | Reference | Weight kg/lb |
|---|---|--------|----------------|--------------|
| Padlocking kit (1) (2) for Emergency stop (3) and Emergency switching off function (4), (padlockable) | XB5AS844● XB5AS944● ZB5AS844 ZB5AS944● | Yellow | ZBZ3605 | 0.045/0.099 |

| Description | Marking | Color | Reference | Weight kg/lb |
|---|-------------------------|--------|-----------------|--------------|
| Ø 60 mm/2.363 in. legend for padlocking device ZBZ3605 for Emergency stop function (3) | - | Yellow | ZBY9140T | 0.004/0.009 |
| | ARRET D'URGENCE | Yellow | ZBY9130T | 0.004/0.009 |
| | EMERGENCY STOP | Yellow | ZBY9330T | 0.004/0.009 |
| | NOT-HALT | Yellow | ZBY9230T | 0.004/0.009 |
| Ø 60 mm/2.363 in. legend for padlocking device ZBZ3605 for Emergency switching off function (4) | - | Yellow | ZBY9101T | 0.004/0.009 |
| | COUPURE D'URGENCE | Yellow | ZBY9160T | 0.004/0.009 |
| | EMERGENCY SWITCHING OFF | Yellow | ZBY9360T | 0.004/0.009 |
| | NOT-AUS | Yellow | ZBY9260T | 0.004/0.009 |



(1) Standard circular legends are not compatible with this product. Use special legends **ZBY9●●●T**.

(2) No isolation function is possible when this guard is fitted.

(3) For conformity with standards EN/IEC 60204-1 and EN/ISO 13850.

(4) For conformity with standard EN/IEC 60204-1.

(5) To add customized markings on these references using the web customization tool, see page 7.

Control stations and enclosures

Plastic control stations XALD and XALK

For Harmony XB5 control and signaling units Ø 22

Stations for customer assembly: accessories

| Pushbutton caps - unmarked | | | | | | |
|---|--------------|--------------|-----------------|----------------|--------------|-------------|
| For use with | Cap | | Sold in lots of | Unit reference | Weight kg/lb | |
| | Type | Color | | | | |
| Circular pushbutton heads ZB5AA supplied without cap | Flush | White | 10 | ZBA1 | 0.001/0.002 | |
| | | Black | 10 | ZBA2 | 0.001/0.002 | |
| | | Green | 10 | ZBA3 | 0.001/0.002 | |
| | | Red | 10 | ZBA4 | 0.001/0.002 | |
| | | Yellow | 10 | ZBA5 | 0.001/0.002 | |
| | | Blue | 10 | ZBA6 | 0.001/0.002 | |
| | | 6 colors (1) | 1 | ZBA9 | 0.006/0.013 | |
| | | Projecting | White | 10 | ZBL1 | 0.001/0.002 |
| | | | Black | 10 | ZBL2 | 0.001/0.002 |
| | Green | | 10 | ZBL3 | 0.001/0.002 | |
| | Red | | 10 | ZBL4 | 0.001/0.002 | |
| | Yellow | | 10 | ZBL5 | 0.001/0.002 | |
| | Blue | | 10 | ZBL6 | 0.001/0.002 | |
| | 6 colors (1) | | 1 | ZBL9 | 0.006/0.013 | |

| Pushbutton caps - marked (2) (sold in lots of 10) | | | | | | |
|---|--------------|---------|-------|--------------|----------------|--------------|
| For use with | Type of push | Marking | | Color of cap | Unit reference | Weight kg/lb |
| | | Text | Color | | | |
| Circular pushbutton heads ZB5AA supplied without cap | Flush | I | White | Green | ZBA331 | 0.001/0.002 |
| | | | Black | White | ZBA131 | 0.001/0.002 |
| | | II | White | Green | ZBA336 | 0.001/0.002 |
| | | | Black | White | ZBA136 | 0.001/0.002 |
| | | III | White | Green | ZBA337 | 0.001/0.002 |
| | | | Black | White | ZBA137 | 0.001/0.002 |
| | | IV | White | Green | ZBA338 | 0.001/0.002 |
| | | | Black | White | ZBA138 | 0.001/0.002 |
| | | START | White | Green | ZBA333 | 0.001/0.002 |
| | | | Black | White | ZBA133 | 0.001/0.002 |
| | | ON | White | Green | ZBA341 | 0.001/0.002 |
| | | | Black | White | ZBA141 | 0.001/0.002 |
| | | MARCHE | White | Green | ZBA342 | 0.001/0.002 |
| | | | Black | White | ZBA142 | 0.001/0.002 |
| | | ⊕ | White | Black | ZBA245 | 0.001/0.002 |
| | | | Black | White | ZBA145 | 0.001/0.002 |
| | | UP | Black | White | ZBA343 | 0.001/0.002 |
| | | DOWN | White | Black | ZBA344 | 0.001/0.002 |
| | | † | White | Black | ZBA335 | 0.001/0.002 |
| | | | Black | White | ZBA334 | 0.001/0.002 |
| | | O | White | Red | ZBA432 | 0.001/0.002 |
| | | | Black | Black | ZBA232 | 0.001/0.002 |
| | | ARRET | White | Red | ZBA433 | 0.001/0.002 |
| | | | Black | Black | ZBA233 | 0.001/0.002 |
| | | STOP | White | Red | ZBA434 | 0.001/0.002 |
| | | | Black | Black | ZBA234 | 0.001/0.002 |
| | | OFF | White | Red | ZBA435 | 0.001/0.002 |
| | | | Black | Black | ZBA235 | 0.001/0.002 |
| | | ⚠ | White | Green | ZBA346 | 0.001/0.002 |
| | | R | White | Blue | ZBA639 | 0.001/0.002 |
| | | + | White | Black | ZBA2934 | 0.001/0.002 |
| | | - | White | Black | ZBA2935 | 0.001/0.002 |

(1) Set of 6 different colored caps: white, black, green, red, yellow and blue.

(2) To add customized markings on these references using the web customization tool, see page 7.



Control stations and enclosures

Plastic control stations XALD and XALK

For Harmony XB5 control and signaling units Ø 22

Stations for customer assembly: accessories



Colored boots

| Description | Color | Sold in lots of | Unit reference | Weight kg/lb |
|---|--------|-----------------|----------------|--------------|
| Colored boots (can be replaced without dismantling the head) | Black | 10 | ZB2BP012 | 0.003/0.007 |
| | Green | 10 | ZB2BP013 | 0.003/0.007 |
| | Red | 10 | ZB2BP014 | 0.003/0.007 |
| | Yellow | 10 | ZB2BP015 | 0.003/0.007 |
| | Blue | 10 | ZB2BP016 | 0.003/0.007 |

Lens caps

Circular lens caps for light sources with integral LED

| | | | | |
|--|---|-------|----------|-------------|
| Pilot lights | White | 10 | ZBV0113 | 0.002/0.004 |
| | Green | 10 | ZBV0133 | 0.002/0.004 |
| | Red | 10 | ZBV0143 | 0.002/0.004 |
| | Orange | 10 | ZBV0153 | 0.002/0.004 |
| | Blue | 10 | ZBV0163 | 0.002/0.004 |
| | 5 different colored grooved lenses (1) | 1 | ZBV0103S | 0.010/0.022 |
| | Illuminated pushbuttons, with flush push | White | 10 | ZBW9113 |
| Green | | 10 | ZBW9133 | 0.002/0.004 |
| Red | | 10 | ZBW9143 | 0.002/0.004 |
| Orange | | 10 | ZBW9153 | 0.002/0.004 |
| Blue | | 10 | ZBW9163 | 0.002/0.004 |
| Illuminated pushbuttons, with projecting push | White | 10 | ZBW9313 | 0.002/0.004 |
| | Green | 10 | ZBW9333 | 0.002/0.004 |
| | Red | 10 | ZBW9343 | 0.002/0.004 |
| | Orange | 10 | ZBW9353 | 0.002/0.004 |
| | Blue | 10 | ZBW9363 | 0.002/0.004 |

Square lens caps for light sources with integral LED

| | | | | |
|--|--------|----|----------|-------------|
| Pilot lights | White | 10 | ZBCV0113 | 0.002/0.004 |
| | Green | 10 | ZBCV0133 | 0.002/0.004 |
| | Red | 10 | ZBCV0143 | 0.002/0.004 |
| | Orange | 10 | ZBCV0153 | 0.002/0.004 |
| | Blue | 10 | ZBCV0163 | 0.002/0.004 |
| Illuminated pushbuttons, with flush push | White | 10 | ZBCW9113 | 0.002/0.004 |
| | Green | 10 | ZBCW9133 | 0.002/0.004 |
| | Red | 10 | ZBCW9143 | 0.002/0.004 |
| | Orange | 10 | ZBCW9153 | 0.002/0.004 |
| | Blue | 10 | ZBCW9163 | 0.002/0.004 |
| Illuminated pushbuttons, with projecting push | White | 10 | ZBCW9313 | 0.002/0.004 |
| | Green | 10 | ZBCW9333 | 0.002/0.004 |
| | Red | 10 | ZBCW9343 | 0.002/0.004 |
| | Orange | 10 | ZBCW9353 | 0.002/0.004 |
| | Blue | 10 | ZBCW9363 | 0.002/0.004 |


(1) Set of 5 different colored lenses: clear, green, red, orange and blue.



ZB5AZ905



ZB5SZ3



ZBZ58



ZBG455

Miscellaneous accessories

| Description | For use with | Sold in lots of | Color | Unit reference | Weight kg/lb |
|--|---|-----------------|--------|----------------|--------------|
| Bezel tool | ZB5AZ901 head | 10 | – | ZB5AZ905 | 0.016/0.035 |
| Nut | Fixing ZB5A head | 10 | Green | ZB5AZ903 | 0.002/0.004 |
| Plastic blanking plugs (with fixing nut) | Square shape for Ø 22/0.866 in. units (1) | 10 | Black | ZB5SZ5 | 0.009/0.020 |
| | Circular shape for Ø 22/0.866 in. units | 10 | Black | ZB5SZ3 (4)(5) | 0.009/0.020 |
| Terminal branch | XALD and XALK control stations | 10 | | XALZ09 | 0.003/0.007 |
| Bellows seals (IP 69K) (2) | Control station with 1 cut-out, installed in harsh environment + Emergency Stop pushbutton type ZB5 (see page 16) | 2 | Black | ZBZ28 | 0.009/0.020 |
| | | | Yellow | ZBZ58 | 0.009/0.020 |

Replacement keys for Emergency stop key release heads and key switches

| Description | Key number | Reference | Weight kg/lb |
|-------------------|------------|-----------|--------------|
| Set of 2 keys (3) | 455 | ZBG455 | 0.013/0.029 |
| | 421E | ZBG421E | 0.014/0.031 |
| | 458A | ZBG458A | 0.014/0.031 |
| | 520E | ZBG520E | 0.014/0.031 |
| | 3131A | ZBG3131A | 0.014/0.031 |

(1) Body/fixing collar ZB5AZ009 necessary for fixation, to be ordered separately.

(2) Not compatible with Ø 30 mm/1.181 in. Emergency Stop heads.

(3) Other key numbers are available.

(4) For white color plated bezel replace C0 with C1, and for other color plated bezels using the web customization tool, see page 7.

(5) To add customized markings on these references using the web customization tool, see page 7.

| X | | | |
|--------------|----|----------------|----|
| XALD102 | 8 | XALK01 | 13 |
| XALD104 | 8 | XALK01H29 | 13 |
| XALD103 | 8 | XALK01H44 | 13 |
| XALD102E | 8 | XALK01HFR | 13 |
| XALD112 | 8 | XALK01T | 13 |
| XALD117 | 8 | XALK01TH26 | 13 |
| XALD114 | 8 | XALK01TH29 | 13 |
| XALD112E | 8 | XALK01THFR | 13 |
| XALD114E | 8 | XALK02 | 13 |
| XALD115 | 8 | XALK03 | 13 |
| XALD118 | 8 | XALK04 | 13 |
| XALD116 | 8 | XALK05 | 13 |
| XALD101 | 8 | XALK84W2ME | 10 |
| XALD101H29 | 8 | XALK84W2MG | 10 |
| XALD111 | 8 | XALK84W3BE | 10 |
| XALD111H29 | 8 | XALK84W3BG | 10 |
| XALD164 | 8 | XALK178 | 9 |
| XALD164H29H7 | 8 | XALK178E | 9 |
| XALD01 | 13 | XALK178F | 9 |
| XALD01H7 | 13 | XALK178FH26 | 9 |
| XALD02 | 13 | XALK178FH29 | 9 |
| XALD02H7 | 13 | XALK178FH44 | 9 |
| XALD03 | 13 | XALK178FH49 | 9 |
| XALD03H7 | 13 | XALK178G | 9 |
| XALD04 | 13 | XALK178GTH26 | 9 |
| XALD04H7 | 13 | XALK178GTH29 | 9 |
| XALD05 | 13 | XALK178GTH44 | 9 |
| XALD05H7 | 13 | XALK178GTHFR | 9 |
| XALD132 | 11 | XALK178H26 | 9 |
| XALD133H7 | 11 | XALK178H29 | 9 |
| XALD134 | 11 | XALK178H44 | 9 |
| XALD142 | 11 | XALK178H49 | 9 |
| XALD144 | 11 | XALK178H49 | 9 |
| XALD144E | 11 | XALK178W3B140E | 10 |
| XALD211 | 11 | XALK178W3B140G | 10 |
| XALD211H29 | 11 | XALK188 | 9 |
| XALD213 | 11 | XALK188E | 9 |
| XALD213E | 11 | XALK188F | 9 |
| XALD214 | 11 | XALK188G | 9 |
| XALD215 | 11 | XALK188GTH26 | 9 |
| XALD222 | 12 | XALK198 | 9 |
| XALD222E | 12 | XALK198 | 9 |
| XALD223 | 12 | XALKW01 | 20 |
| XALD224 | 11 | XALZ09 | 39 |
| XALD225 | 11 | XB5DSB | 15 |
| XALD241 | 11 | XB5DSG | 15 |
| XALD311 | 12 | XB5DSM | 15 |
| XALD311H29H7 | 12 | XB5DTB22 | 15 |
| XALD321 | 12 | XB5DTB23 | 15 |
| XALD321H29H7 | 12 | XB5DTB24 | 15 |
| XALD324 | 12 | XB5DTB25 | 15 |
| XALD324E | 12 | XB5DTGM2 | 15 |
| XALD325 | 12 | XB5DTGM3 | 15 |
| XALD326 | 12 | XB5DTGM4 | 15 |
| XALD328 | 12 | XB5DTGM5 | 15 |
| XALD334 | 12 | XB5PRJ45 | 15 |
| XALD339 | 12 | XB5PUSB3 | 15 |
| XALD361B | 11 | Z | |
| XALD361M | 11 | ZALVB1 | 14 |
| XALD363B | 11 | ZALVB3 | 14 |
| XALD363G | 11 | ZALVB4 | 14 |
| XALD363M | 11 | ZALVB5 | 14 |
| | | ZALVB6 | 14 |
| | | ZALVG1 | 14 |
| | | ZALVG3 | 14 |
| | | ZALVG4 | 14 |
| | | ZALVG5 | 14 |
| | | ZALVG6 | 14 |
| | | ZALVM1 | 14 |
| | | ZALVM3 | 14 |
| | | ZALVM4 | 14 |
| | | ZALVM5 | 14 |
| | | ZALVM6 | 14 |
| | | ZALY2 | 31 |
| | | ZALY4 | 31 |
| | | ZB2BP012 | 38 |
| | | ZB2BP013 | 38 |
| | | ZB2BP014 | 38 |
| | | ZB2BP015 | 38 |
| | | ZB2BP016 | 38 |
| | | ZB5AA0 | 16 |
| | | ZB5AA1 | 16 |
| | | ZB5AA1C0 | 16 |
| | | ZB5AA2 | 16 |
| | | ZB5AA2C0 | 16 |
| | | ZB5AA3 | 16 |
| | | ZB5AA3C0 | 16 |
| | | ZB5AA4 | 16 |
| | | ZB5AA4C0 | 16 |
| | | ZB5AA5 | 16 |
| | | ZB5AA5C0 | 16 |
| | | ZB5AA6 | 16 |
| | | ZB5AA6C0 | 16 |
| | | ZB5AA8 | 16 |
| | | ZB5AA8C0 | 16 |
| | | ZB5AA9 | 16 |
| | | ZB5AA14 | 16 |
| | | ZB5AA14C0 | 16 |
| | | ZB5AA16 | 16 |
| | | ZB5AA16C0 | 16 |
| | | ZB5AA18 | 16 |
| | | ZB5AA18C0 | 16 |
| | | ZB5AA24 | 16 |
| | | ZB5AA24C0 | 16 |
| | | ZB5AA26 | 16 |
| | | ZB5AA26C0 | 16 |
| | | ZB5AA34 | 16 |
| | | ZB5AA34C0 | 16 |
| | | ZB5AA36 | 16 |
| | | ZB5AA36C0 | 16 |
| | | ZB5AA38 | 16 |
| | | ZB5AA38C0 | 16 |
| | | ZB5AA44 | 16 |
| | | ZB5AA44C0 | 16 |
| | | ZB5AA46 | 16 |
| | | ZB5AA46C0 | 16 |
| | | ZB5AA48 | 16 |
| | | ZB5AA48C0 | 16 |
| | | ZB5AA54 | 16 |
| | | ZB5AA54C0 | 16 |
| | | ZB5AA56 | 16 |
| | | ZB5AA56C0 | 16 |
| | | ZB5AA58 | 16 |
| | | ZB5AA58C0 | 16 |
| | | ZB5AA64 | 16 |
| | | ZB5AA64C0 | 16 |
| | | ZB5AA66 | 16 |
| | | ZB5AA66C0 | 16 |
| | | ZB5AA68 | 16 |
| | | ZB5AA68C0 | 16 |
| | | ZB5AA88 | 27 |
| | | ZB5AA88C0 | 27 |
| | | ZB5AA131 | 17 |
| | | ZB5AA131C0 | 17 |
| | | ZB5AA133 | 17 |
| | | ZB5AA136 | 17 |
| | | ZB5AA141 | 17 |
| | | ZB5AA142 | 17 |
| | | ZB5AA145 | 17 |
| | | ZB5AA232 | 17 |
| | | ZB5AA233 | 17 |
| | | ZB5AA234 | 17 |
| | | ZB5AA235 | 17 |
| | | ZB5AA245 | 17 |
| | | ZB5AA331 | 17 |
| | | ZB5AA331C0 | 17 |
| | | ZB5AA333 | 17 |
| | | ZB5AA333C0 | 17 |
| | | ZB5AA334 | 17 |
| | | ZB5AA334C0 | 17 |
| | | ZB5AA335 | 17 |
| | | ZB5AA335C0 | 17 |
| | | ZB5AA336 | 17 |
| | | ZB5AA341 | 17 |
| | | ZB5AA342 | 17 |
| | | ZB5AA343 | 17 |
| | | ZB5AA344 | 17 |
| | | ZB5AA432 | 17 |
| | | ZB5AA432C0 | 17 |
| | | ZB5AA433 | 17 |
| | | ZB5AA434 | 17 |
| | | ZB5AA434C0 | 17 |
| | | ZB5AA435 | 17 |
| | | ZB5AC2 | 17 |
| | | ZB5AC3 | 17 |
| | | ZB5AC4 | 17 |
| | | ZB5AC5 | 17 |
| | | ZB5AC6 | 17 |
| | | ZB5AC24 | 17 |
| | | ZB5AC34 | 17 |
| | | ZB5AC44 | 17 |
| | | ZB5AC54 | 17 |
| | | ZB5AC64 | 17 |
| | | ZB5AD2 | 23 |
| | | ZB5AD2C0 | 23 |
| | | ZB5AD3 | 23 |
| | | ZB5AD3C0 | 23 |
| | | ZB5AD4 | 23 |
| | | ZB5AD4C0 | 23 |
| | | ZB5AD5 | 23 |
| | | ZB5AD5C0 | 23 |
| | | ZB5AD7 | 23 |
| | | ZB5AD7C0 | 23 |
| | | ZB5AD8 | 23 |
| | | ZB5AD8C0 | 23 |
| | | ZB5AD28 | 26 |
| | | ZB5AD28C0 | 26 |
| | | ZB5AD29 | 25 |
| | | ZB5AD29C0 | 25 |
| | | ZB5AD39 | 25 |
| | | ZB5AD39C0 | 25 |
| | | ZB5AD48 | 26 |
| | | ZB5AD48C0 | 26 |
| | | ZB5AD49 | 25 |
| | | ZB5AD49C0 | 25 |
| | | ZB5AD59 | 25 |
| | | ZB5AD59C0 | 25 |
| | | ZB5AD79 | 25 |
| | | ZB5AD79C0 | 25 |
| | | ZB5AD89 | 25 |
| | | ZB5AD89C0 | 25 |
| | | ZB5AD201 | 23 |
| | | ZB5AD201C0 | 23 |
| | | ZB5AD203 | 23 |
| | | ZB5AD203C0 | 23 |
| | | ZB5AD204 | 24 |
| | | ZB5AD204C0 | 24 |
| | | ZB5AD205 | 24 |
| | | ZB5AD205C0 | 24 |
| | | ZB5AD206 | 24 |
| | | ZB5AD301 | 23 |
| | | ZB5AD301C0 | 23 |
| | | ZB5AD303 | 23 |
| | | ZB5AD303C0 | 23 |
| | | ZB5AD304 | 24 |
| | | ZB5AD304C0 | 24 |
| | | ZB5AD305 | 24 |
| | | ZB5AD306 | 24 |
| | | ZB5AD401 | 23 |
| | | ZB5AD401C0 | 23 |
| | | ZB5AD403 | 23 |
| | | ZB5AD403C0 | 23 |
| | | ZB5AD404 | 24 |
| | | ZB5AD404C0 | 24 |
| | | ZB5AD405 | 24 |
| | | ZB5AD405C0 | 24 |
| | | ZB5AD406 | 24 |
| | | ZB5AD501 | 23 |
| | | ZB5AD501C0 | 23 |
| | | ZB5AD503 | 23 |
| | | ZB5AD503C0 | 23 |
| | | ZB5AD504 | 24 |
| | | ZB5AD504C0 | 24 |
| | | ZB5AD505 | 24 |
| | | ZB5AD506 | 24 |
| | | ZB5AD701 | 23 |
| | | ZB5AD701C0 | 23 |
| | | ZB5AD703 | 23 |
| | | ZB5AD703C0 | 23 |
| | | ZB5AD704 | 24 |
| | | ZB5AD704C0 | 24 |
| | | ZB5AD705 | 24 |
| | | ZB5AD706 | 24 |
| | | ZB5AD801 | 23 |
| | | ZB5AD801C0 | 23 |

| | | | | | | | | | |
|-------------|----|-------------|----|-------------|----|---------------|----|-------------|----|
| ZB5AD803 | 23 | ZB5AJ4 | 24 | ZB5AK1753C0 | 28 | ZB5AS964 | 19 | ZB5AW383C0 | 27 |
| ZB5AD803C0 | 23 | ZB5AJ4C0 | 24 | ZB5AK1763 | 28 | ZB5AT2 | 18 | ZB5AW383S | 27 |
| ZB5AD804 | 24 | ZB5AJ5 | 24 | ZB5AK1763C0 | 28 | ZB5AT24 | 18 | ZB5AW383SC0 | 27 |
| ZB5AD804C0 | 24 | ZB5AJ5C0 | 24 | ZB5AK1783 | 28 | ZB5AT82Y | 22 | ZB5AW713 | 18 |
| ZB5AD805 | 24 | ZB5AJ7 | 24 | ZB5AK1783C0 | 28 | ZB5AT84 | 19 | ZB5AW733 | 18 |
| ZB5AD806 | 24 | ZB5AJ7C0 | 24 | ZB5AK1813 | 28 | ZB5AT844 | 19 | ZB5AW743 | 21 |
| ZB5AD912 | 15 | ZB5AJ8 | 24 | ZB5AK1813C0 | 28 | ZB5AT8643M | 21 | ZB5AW753 | 18 |
| ZB5AD912C0 | 15 | ZB5AJ8C0 | 24 | ZB5AK1833 | 28 | ZB5AT8643M130 | 21 | ZB5AW763 | 18 |
| ZB5AD922 | 15 | ZB5AK1213 | 28 | ZB5AK1833C0 | 28 | ZB5AT8643M140 | 21 | ZB5AX2 | 18 |
| ZB5AD922C0 | 15 | ZB5AK1213C0 | 28 | ZB5AK1843 | 28 | ZB5AT8643M230 | 21 | ZB5AX84 | 19 |
| ZB5AD2801 | 26 | ZB5AK1233 | 28 | ZB5AK1843C0 | 28 | ZB5AT8643M330 | 21 | ZB5AZ009 | 14 |
| ZB5AD2801C0 | 26 | ZB5AK1233C0 | 28 | ZB5AK1853 | 28 | ZB5AT8643M430 | 21 | ZB5AZ903 | 39 |
| ZB5AD2804 | 26 | ZB5AK1243 | 28 | ZB5AK1853C0 | 28 | ZB5AT8643M630 | 21 | ZB5AZ905 | 39 |
| ZB5AD2804C0 | 26 | ZB5AK1243C0 | 28 | ZB5AK1863 | 28 | ZB5AV013 | 27 | ZB5CA1 | 16 |
| ZB5AD2806 | 26 | ZB5AK1253 | 28 | ZB5AK1863C0 | 28 | ZB5AV013E | 27 | ZB5CA2 | 16 |
| ZB5AD2806C0 | 26 | ZB5AK1253C0 | 28 | ZB5AK1883 | 28 | ZB5AV013S | 27 | ZB5CA3 | 16 |
| ZB5AG0 | 25 | ZB5AK1263 | 28 | ZB5AK1883C0 | 28 | ZB5AV033 | 27 | ZB5CA4 | 16 |
| ZB5AG02 | 25 | ZB5AK1263C0 | 28 | ZB5AL1 | 16 | ZB5AV033E | 27 | ZB5CA5 | 16 |
| ZB5AG05 | 25 | ZB5AK1283 | 28 | ZB5AL1C0 | 16 | ZB5AV033S | 27 | ZB5CA6 | 16 |
| ZB5AG08 | 25 | ZB5AK1283C0 | 28 | ZB5AL2 | 16 | ZB5AV043 | 27 | ZB5CA331 | 17 |
| ZB5AG09 | 25 | ZB5AK1313 | 28 | ZB5AL2C0 | 16 | ZB5AV043E | 27 | ZB5CA432 | 17 |
| ZB5AG0C0 | 25 | ZB5AK1313C0 | 28 | ZB5AL3 | 16 | ZB5AV043S | 27 | ZB5CA2912 | 17 |
| ZB5AG0D | 26 | ZB5AK1333 | 28 | ZB5AL3C0 | 16 | ZB5AV053 | 27 | ZB5CA2934 | 17 |
| ZB5AG1 | 25 | ZB5AK1333C0 | 28 | ZB5AL4 | 16 | ZB5AV053E | 27 | ZB5CA6939 | 17 |
| ZB5AG1D | 26 | ZB5AK1343 | 28 | ZB5AL4C0 | 16 | ZB5AV053S | 27 | ZB5CL1 | 16 |
| ZB5AG2 | 25 | ZB5AK1343C0 | 28 | ZB5AL5 | 16 | ZB5AV063 | 27 | ZB5CL2 | 16 |
| ZB5AG2C0 | 25 | ZB5AK1353 | 28 | ZB5AL5C0 | 16 | ZB5AV063E | 27 | ZB5CL3 | 16 |
| ZB5AG2D | 26 | ZB5AK1353C0 | 28 | ZB5AL6 | 16 | ZB5AV063S | 27 | ZB5CL4 | 16 |
| ZB5AG02D | 26 | ZB5AK1363 | 28 | ZB5AL6C0 | 16 | ZB5AV083 | 27 | ZB5CL5 | 16 |
| ZB5AG2DC0 | 26 | ZB5AK1363C0 | 28 | ZB5AL232 | 17 | ZB5AV083E | 27 | ZB5CL6 | 16 |
| ZB5AG3 | 25 | ZB5AK1383 | 28 | ZB5AL233 | 17 | ZB5AV083S | 27 | ZB5CV003 | 27 |
| ZB5AG3C0 | 25 | ZB5AK1383C0 | 28 | ZB5AL234 | 17 | ZB5AW113 | 27 | ZB5CV013 | 27 |
| ZB5AG3D | 26 | ZB5AK1413 | 28 | ZB5AL235 | 17 | ZB5AW113C0 | 27 | ZB5CV033 | 27 |
| ZB5AG03D | 26 | ZB5AK1413C0 | 28 | ZB5AL432 | 17 | ZB5AW133 | 27 | ZB5CV043 | 27 |
| ZB5AG4 | 25 | ZB5AK1433 | 28 | ZB5AL432C0 | 17 | ZB5AW133C0 | 27 | ZB5CV053 | 27 |
| ZB5AG4C0 | 25 | ZB5AK1433C0 | 28 | ZB5AL433 | 17 | ZB5AW143 | 27 | ZB5CV063 | 27 |
| ZB5AG4D | 26 | ZB5AK1443 | 28 | ZB5AL434 | 17 | ZB5AW143C0 | 27 | ZB5CW313 | 27 |
| ZB5AG04D | 26 | ZB5AK1443C0 | 28 | ZB5AL435 | 17 | ZB5AW153 | 27 | ZB5CW333 | 27 |
| ZB5AG4DC0 | 26 | ZB5AK1453 | 28 | ZB5AP1S | 16 | ZB5AW153C0 | 27 | ZB5CW343 | 27 |
| ZB5AG05C0 | 25 | ZB5AK1453C0 | 28 | ZB5AP2S | 16 | ZB5AW163 | 27 | ZB5CW353 | 27 |
| ZB5AG5 | 25 | ZB5AK1463 | 28 | ZB5AP3S | 16 | ZB5AW163C0 | 27 | ZB5CW363 | 27 |
| ZB5AG5D | 26 | ZB5AK1463C0 | 28 | ZB5AP4S | 16 | ZB5AW183 | 27 | ZB5SZ3 | 39 |
| ZB5AG05D | 26 | ZB5AK1483 | 28 | ZB5AP5S | 16 | ZB5AW313 | 27 | ZB5SZ5 | 39 |
| ZB5AG6 | 25 | ZB5AK1483C0 | 28 | ZB5AP6S | 16 | ZB5AW313C0 | 27 | ZBA1 | 37 |
| ZB5AG6C0 | 25 | ZB5AK1513 | 28 | ZB5AS12 | 18 | ZB5AW313S | 27 | ZBA2 | 37 |
| ZB5AG6D | 26 | ZB5AK1513C0 | 28 | ZB5AS22 | 18 | ZB5AW313SC0 | 27 | ZBA3 | 37 |
| ZB5AG06D | 26 | ZB5AK1533 | 28 | ZB5AS42 | 18 | ZB5AW333 | 27 | ZBA4 | 37 |
| ZB5AG7 | 25 | ZB5AK1533C0 | 28 | ZB5AS52 | 18 | ZB5AW333C0 | 27 | ZBA5 | 37 |
| ZB5AG7C0 | 25 | ZB5AK1543 | 28 | ZB5AS55 | 18 | ZB5AW333S | 27 | ZBA6 | 37 |
| ZB5AG07D | 26 | ZB5AK1543C0 | 28 | ZB5AS62 | 18 | ZB5AW333SC0 | 27 | ZBA9 | 37 |
| ZB5AG7D | 26 | ZB5AK1553 | 28 | ZB5AS72 | 18 | ZB5AW343 | 27 | ZBA131 | 37 |
| ZB5AG08C0 | 25 | ZB5AK1553C0 | 28 | ZB5AS84W00 | 20 | ZB5AW343C0 | 27 | ZBA133 | 37 |
| ZB5AG8 | 25 | ZB5AK1563 | 28 | ZB5AS84W2B | 20 | ZB5AW343S | 27 | ZBA136 | 37 |
| ZB5AG8D | 26 | ZB5AK1563C0 | 28 | ZB5AS84W2G | 20 | ZB5AW343SC0 | 27 | ZBA137 | 37 |
| ZB5AG08D | 26 | ZB5AK1583 | 28 | ZB5AS84W2M | 20 | ZB5AW353 | 27 | ZBA138 | 37 |
| ZB5AG9 | 25 | ZB5AK1583C0 | 28 | ZB5AS84W3B | 20 | ZB5AW353C0 | 27 | ZBA141 | 37 |
| ZB5AG9C0 | 25 | ZB5AK1713 | 28 | ZB5AS834 | 19 | ZB5AW353S | 27 | ZBA142 | 37 |
| ZB5AG9D | 26 | ZB5AK1713C0 | 28 | ZB5AS842Y | 22 | ZB5AW353SC0 | 27 | ZBA145 | 37 |
| ZB5AG09D | 26 | ZB5AK1733 | 28 | ZB5AS844 | 19 | ZB5AW363 | 27 | ZBA232 | 37 |
| ZB5AJ2 | 24 | ZB5AK1733C0 | 28 | ZB5AS934 | 19 | ZB5AW363C0 | 27 | ZBA233 | 37 |
| ZB5AJ2C0 | 24 | ZB5AK1743 | 28 | ZB5AS942Y | 22 | ZB5AW363S | 27 | ZBA234 | 37 |
| ZB5AJ3 | 24 | ZB5AK1743C0 | 28 | ZB5AS944 | 19 | ZB5AW363SC0 | 27 | ZBA235 | 37 |
| ZB5AJ3C0 | 24 | ZB5AK1753 | 28 | ZB5AS944D | 19 | ZB5AW383 | 27 | ZBA245 | 37 |

| | | | | | | | | | |
|-----------|----|------------|----|-----------|----|-----------|----|-----------|----|
| ZBA331 | 37 | ZBVB8 | 14 | ZBY1107 | 33 | ZBY2131 | 29 | ZBY2211 | 30 |
| ZBA333 | 37 | ZBVG1 | 14 | ZBY1108 | 33 | ZBY02131 | 31 | ZBY02211 | 32 |
| ZBA334 | 37 | ZBVG3 | 14 | ZBY1115 | 33 | ZBY2132 | 29 | ZBY2212 | 30 |
| ZBA335 | 37 | ZBVG4 | 14 | ZBY1116 | 33 | ZBY02132 | 31 | ZBY02212 | 32 |
| ZBA336 | 37 | ZBVG5 | 14 | ZBY1146 | 33 | ZBY2133 | 29 | ZBY2213 | 30 |
| ZBA337 | 37 | ZBVG6 | 14 | ZBY1147 | 33 | ZBY02133 | 31 | ZBY02213 | 32 |
| ZBA338 | 37 | ZBVG8 | 14 | ZBY1148 | 33 | ZBY2134 | 29 | ZBY2214 | 30 |
| ZBA341 | 37 | ZBVM1 | 14 | ZBY1149 | 33 | ZBY02134 | 31 | ZBY02214 | 32 |
| ZBA342 | 37 | ZBVM3 | 14 | ZBY1203 | 33 | ZBY2135 | 29 | ZBY2223 | 30 |
| ZBA343 | 37 | ZBVM4 | 14 | ZBY1204 | 33 | ZBY02135 | 31 | ZBY02223 | 32 |
| ZBA344 | 37 | ZBVM5 | 14 | ZBY1207 | 33 | ZBY2146 | 29 | ZBY2226 | 30 |
| ZBA346 | 37 | ZBVM6 | 14 | ZBY1208 | 33 | ZBY02146 | 31 | ZBY02226 | 32 |
| ZBA432 | 37 | ZBVM8 | 14 | ZBY1214 | 33 | ZBY2147 | 29 | ZBY2227 | 30 |
| ZBA433 | 37 | ZBW9113 | 38 | ZBY1303 | 33 | ZBY02147 | 31 | ZBY02227 | 32 |
| ZBA434 | 37 | ZBW9133 | 38 | ZBY1304 | 33 | ZBY2148 | 29 | ZBY2228 | 30 |
| ZBA435 | 37 | ZBW9143 | 38 | ZBY1311 | 33 | ZBY02148 | 31 | ZBY02228 | 32 |
| ZBA639 | 37 | ZBW9153 | 38 | ZBY1312 | 33 | ZBY2164 | 29 | ZBY2229 | 30 |
| ZBA2934 | 37 | ZBW9163 | 38 | ZBY1316 | 33 | ZBY02164 | 31 | ZBY02229 | 32 |
| ZBA2935 | 37 | ZBW9313 | 38 | ZBY1912 | 33 | ZBY2165 | 29 | ZBY2230 | 30 |
| ZBCV0113 | 38 | ZBW9333 | 38 | ZBY2101 | 29 | ZBY02165 | 31 | ZBY02230 | 32 |
| ZBCV0133 | 38 | ZBW9343 | 38 | ZBY2101C0 | 29 | ZBY2166 | 29 | ZBY2231 | 30 |
| ZBCV0143 | 38 | ZBW9353 | 38 | ZBY2103 | 29 | ZBY02166 | 31 | ZBY02231 | 32 |
| ZBCV0153 | 38 | ZBW9363 | 38 | ZBY02103 | 31 | ZBY2166C0 | 29 | ZBY2232 | 30 |
| ZBCV0163 | 38 | ZBY2H101 | 29 | ZBY2103C0 | 29 | ZBY2167 | 29 | ZBY02232 | 32 |
| ZBCW9113 | 38 | ZBY4H101 | 29 | ZBY2104 | 29 | ZBY02167 | 31 | ZBY2233 | 30 |
| ZBCW9133 | 38 | ZBY9W2B130 | 19 | ZBY02104 | 31 | ZBY2178 | 29 | ZBY02233 | 32 |
| ZBCW9143 | 38 | | 34 | ZBY2104C0 | 29 | ZBY02178 | 31 | ZBY2234 | 30 |
| ZBCW9153 | 38 | ZBY9W2B140 | 34 | ZBY2105 | 29 | ZBY2178C0 | 29 | ZBY02234 | 32 |
| ZBCW9163 | 38 | ZBY9W2B230 | 19 | ZBY02105 | 31 | ZBY2179 | 29 | ZBY2235 | 30 |
| ZBCW9313 | 38 | | 34 | ZBY2106 | 29 | ZBY02179 | 31 | ZBY02235 | 32 |
| ZBCW9333 | 38 | ZBY9W2B330 | 19 | ZBY02106 | 31 | ZBY2184 | 29 | ZBY2265 | 30 |
| ZBCW9343 | 38 | | 34 | ZBY2107 | 29 | ZBY02184 | 31 | ZBY02265 | 32 |
| ZBCW9353 | 38 | ZBY9W2B430 | 34 | ZBY02107 | 31 | ZBY2185 | 29 | ZBY2266 | 30 |
| ZBCW9363 | 38 | ZBY9W2B630 | 34 | ZBY2108 | 29 | ZBY02185 | 31 | ZBY02266 | 32 |
| ZBCY2H101 | 29 | ZBY9W2G130 | 34 | ZBY2108 | 31 | ZBY2186 | 29 | ZBY2267 | 30 |
| ZBCY4H101 | 29 | ZBY9W2G140 | 34 | ZBY02108 | 31 | ZBY02186 | 31 | ZBY02267 | 32 |
| ZBCY1101 | 33 | ZBY9W2G230 | 34 | ZBY2109 | 29 | ZBY2186C0 | 29 | ZBY2284 | 30 |
| ZBCZ34 | 29 | ZBY9W2G330 | 34 | ZBY02109 | 31 | ZBY2195 | 29 | ZBY02284 | 32 |
| ZBE101 | 14 | ZBY9W2G430 | 34 | ZBY2110 | 29 | ZBY02195 | 31 | ZBY2295 | 30 |
| ZBE102 | 14 | ZBY9W2G630 | 34 | ZBY02110 | 31 | ZBY02195 | 31 | ZBY02295 | 32 |
| ZBG421E | 39 | ZBY9W2M130 | 34 | ZBY2111 | 29 | ZBY2196 | 29 | ZBY02295 | 32 |
| ZBG455 | 39 | ZBY9W2M140 | 34 | ZBY02111 | 31 | ZBY02196 | 31 | ZBY2297 | 30 |
| ZBG458A | 39 | ZBY9W2M230 | 34 | ZBY2112 | 29 | ZBY2197 | 29 | ZBY02297 | 32 |
| ZBG520E | 39 | ZBY9W2M230 | 34 | ZBY02112 | 31 | ZBY02197 | 31 | ZBY2298 | 30 |
| ZBG3131A | 39 | ZBY9W2M330 | 34 | ZBY2113 | 29 | ZBY2198 | 29 | ZBY02298 | 32 |
| ZBL1 | 37 | ZBY9W2M430 | 34 | ZBY02113 | 31 | ZBY02198 | 31 | ZBY2299 | 30 |
| ZBL2 | 37 | ZBY9W2M630 | 34 | ZBY2114 | 29 | ZBY2199 | 29 | ZBY02299 | 32 |
| ZBL3 | 37 | ZBY9W3B130 | 34 | ZBY02114 | 31 | ZBY02199 | 31 | ZBY2303 | 30 |
| ZBL4 | 37 | ZBY9W3B140 | 34 | ZBY2115 | 29 | ZBY2203 | 30 | ZBY02303 | 32 |
| ZBL5 | 37 | ZBY9W3B230 | 34 | ZBY02115 | 31 | ZBY02203 | 32 | ZBY2303C0 | 30 |
| ZBL6 | 37 | ZBY9W3B330 | 34 | ZBY2116 | 29 | ZBY2204 | 30 | ZBY2304 | 29 |
| ZBL9 | 37 | ZBY9W3B430 | 34 | ZBY02116 | 31 | ZBY02204 | 32 | ZBY02304 | 31 |
| ZBV0103S | 38 | ZBY9W3B630 | 34 | ZBY2123 | 29 | ZBY2205 | 30 | ZBY2304C0 | 29 |
| ZBV0113 | 38 | ZBY0101 | 31 | ZBY02123 | 31 | ZBY02205 | 32 | ZBY2305 | 30 |
| ZBV0133 | 38 | ZBY0102 | 31 | ZBY2126 | 29 | ZBY2206 | 30 | ZBY02305 | 32 |
| ZBV0143 | 38 | ZBY0104 | 29 | ZBY02126 | 31 | ZBY02206 | 32 | ZBY2306 | 30 |
| ZBV0153 | 38 | ZBY00104 | 31 | ZBY2127 | 29 | ZBY2207 | 30 | ZBY02306 | 32 |
| ZBV0163 | 38 | ZBY0123 | 29 | ZBY02127 | 31 | ZBY02207 | 32 | ZBY2307 | 30 |
| ZBVB1 | 14 | ZBY00123 | 31 | ZBY2128 | 29 | ZBY2208 | 30 | ZBY02307 | 32 |
| ZBVB3 | 14 | ZBY0140 | 31 | ZBY02128 | 31 | ZBY02208 | 32 | ZBY2308 | 30 |
| ZBVB4 | 14 | ZBY1101 | 33 | ZBY02128 | 31 | ZBY2209 | 30 | ZBY02308 | 32 |
| ZBVB5 | 14 | ZBY1103 | 33 | ZBY2129 | 29 | ZBY02209 | 32 | ZBY2309 | 30 |
| ZBVB6 | 14 | ZBY1104 | 33 | ZBY02129 | 31 | ZBY02209 | 32 | ZBY02309 | 32 |
| | | ZBY1105 | 33 | ZBY02130 | 31 | ZBY2210 | 30 | ZBY2310 | 30 |
| | | ZBY1106 | 33 | ZBY2130 | 29 | ZBY02210 | 32 | | |

| | | | |
|-----------|----|--------------|----|
| ZBY02310 | 32 | ZBY9260 | 21 |
| ZBY2311 | 30 | | 33 |
| ZBY02311 | 32 | ZBY9260M | 35 |
| ZBY2312 | 30 | ZBY9260T | 36 |
| ZBY02312 | 32 | ZBY9320 | 19 |
| ZBY2313 | 30 | | 33 |
| ZBY02313 | 32 | ZBY9330M | 35 |
| ZBY2314 | 30 | ZBY9330T | 36 |
| ZBY02314 | 32 | ZBY9360 | 21 |
| ZBY2316 | 30 | | 33 |
| ZBY02316 | 32 | ZBY9360M | 35 |
| ZBY2321 | 30 | ZBY9360T | 36 |
| ZBY02321 | 32 | ZBY9420 | 19 |
| ZBY2322 | 30 | | 33 |
| ZBY02322 | 32 | ZBY9430M | 35 |
| ZBY2323 | 30 | ZBY9460 | 21 |
| ZBY02323 | 32 | | 33 |
| ZBY2326 | 30 | ZBY9460M | 35 |
| ZBY02326 | 32 | ZBY9530M | 35 |
| ZBY2327 | 30 | ZBY9620 | 19 |
| ZBY02327 | 32 | | 33 |
| ZBY2328 | 30 | ZBY9630M | 35 |
| ZBY02328 | 32 | ZBY9660 | 21 |
| ZBY2330 | 30 | | 33 |
| ZBY02330 | 32 | ZBY9660M | 35 |
| ZBY2334 | 30 | ZBY9730M | 35 |
| ZBY02334 | 32 | ZBY9830M | 35 |
| ZBY2364 | 30 | ZBY22420001 | 30 |
| ZBY02364 | 32 | ZBY022420001 | 32 |
| ZBY2366 | 30 | ZBZ28 | 22 |
| ZBY02366 | 32 | | 39 |
| ZBY2367 | 30 | ZBZ32 | 29 |
| ZBY02367 | 32 | ZBZ32C0 | 29 |
| ZBY2367C0 | 30 | ZBZ34 | 29 |
| ZBY2385 | 30 | ZBZ48 | 18 |
| ZBY02385 | 32 | ZBZ58 | 22 |
| ZBY2387 | 30 | | 39 |
| ZBY02387 | 32 | ZBZ1600 | 35 |
| ZBY2931 | 29 | ZBZ1602 | 35 |
| ZBY02931 | 31 | ZBZ1604 | 35 |
| ZBY4100 | 31 | ZBZ1605 | 35 |
| ZBY4101 | 29 | ZBZ1606 | 35 |
| ZBY4101C0 | 29 | ZBZ3605 | 36 |
| ZBY4140 | 29 | ZBZVG | 14 |
| ZBY9101 | 21 | ZBZVM | 14 |
| | 33 | ZENL1111 | 14 |
| ZBY9101M | 35 | ZENL1121 | 14 |
| ZBY9101T | 36 | | |
| ZBY9120 | 19 | | |
| | 33 | | |
| ZBY9121 | 19 | | |
| | 33 | | |
| ZBY9130M | 35 | | |
| ZBY9130T | 36 | | |
| ZBY9140M | 35 | | |
| ZBY9140T | 36 | | |
| ZBY9160 | 21 | | |
| | 33 | | |
| ZBY9160M | 35 | | |
| ZBY9160T | 36 | | |
| ZBY9220 | 19 | | |
| | 33 | | |
| ZBY9230M | 35 | | |
| ZBY9230T | 36 | | |



www.schneider-electric.com/control

Schneider Electric Industries SAS

Head Office
35, rue Joseph Monier
F-92500 Rueil-Malmaison
France

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Design: Schneider Electric
Photos: Schneider Electric