EQUI TECHNO
Equipment & Technologies

@EQUI_TECHNO

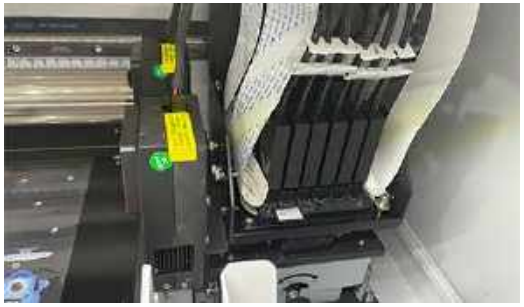

UV DTF PRINTER TechnoStart

Модель	UV-F30 (принтер A3 UV DTF)
Модель сопла	2 *Epson XP600
Скорость печати	4 прохода 3м2/ч, 6 проходов 2,6 м2/ч, 8 проходов 2 м2 /ч, 12 проходов 1,5 м2 /ч
Цвет	CMYK + W + V
Формат печати	300 мм
Печатные носители	УФ-пленка AB
Разрешение	4/6/8 /12PASS
Ламинирование	Встроенный автоматический ламинатор
Охлаждение	Воздушное охлаждение
Габариты, вес	910 (Д) *949 (Ш) *1078 (В) мм 116 кг
Источник питания	110 В/220 В 50-60 ГЦ 400 Вт
Условия работы	Температура: 20 ? -30 ? влажность: 35%-65%
Программное обеспечение	Maintop/Riin/Flexiprint/Cadlink

г. Минск, ул. Бабушкина, 54, оф. 1, e-mail: sales@equitechno.by, тел. /факс: +375 17 378 05 20, 258 82 46,
GSM: +375 29 381 60 11, +375 44 797 00 56, +375 29 641 05 22, +375 29 641 41 03, +375 29 691 05 15,
www.equitechno.by, www.эквитехно.бел, www.uvprinter.by

C M Y K Fr Fg + W

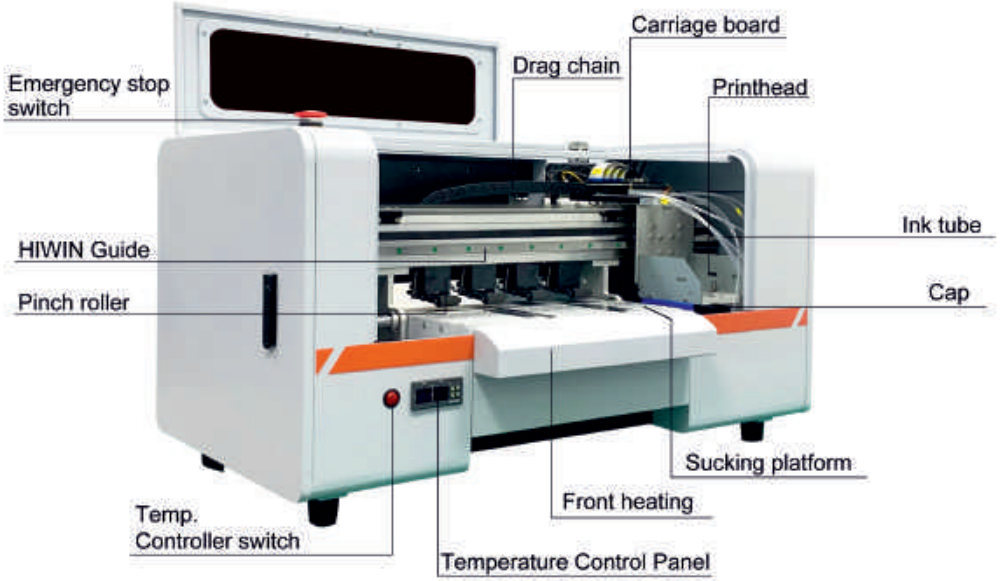

Product information **DTF PRINTER TechnoStart**

Model:	A3/30cm DTF PRINTER	
Printhead:	2*Epson XP600	
RIP Software	Riin/Flexiprint/Cadlink/Maintop,etc.	
Printing Color:	4C+W or 6C+W (Lc/Lm/Fr/Fg as option)	
Printing Size:	300mm	
Media Transfer:	Auto feeding and take-up system	
Heating Method:	Front and back independent heating	
Ink System:	Auto ink supply,white ink circulating and stirring	
Power Supply:	110V/220V 50-60HZ 200W/2000W	
Work Environment:	Temperature:20°C-30°C humidity:40%-70%	
Printing Speed	High Speed Mode	6m²/h
	HD Mode	3.5m²/h
Package Size/Weight:	Printer	100*64*64cm 85kg
	Powder Shaker	80*60*72cm 56kg

Details Display

Electrical board

Ink tank


Paper-lack Sensor


Feed-in system

Ink pump

Servo motor


Synchronous pully

Wave filter

EQUI TECHNO
Equipment & Technologies

г. Минск, ул. Бабушкина, 54, оф. 1, e-mail: sales@equitechno.by, тел. /факс: +375 17 378 05 20, 258 82 46,
GSM: +375 29 381 60 11, +375 44 797 00 56, +375 29 641 05 22, +375 29 641 41 03, +375 29 691 05 15,
www.equitechno.by, www.эквитехно.бел, www.uvprinter.by