




Best Colours in Ibafacade

 **ibakimya**
"elektrostatik toz boya"



PE55Q+7737103CMX



PE55Q+1551102CMX



PE55QC9003103CMX



PE55QT7273103CMX



PE55Q+7280103CMX



PE55QC3303103CMX



PE55QT7521101CMX



PE55QC7715103CMX



PE55QC5111103CMX

IBAFACADE



PE55Q+8355103CMX



PE55Q+8880103CMX




PE55Q+8860103CMX



PE55Q+8870103CMX



PS77Q+1775101CMX



PS77Q+6779101CMX



PS77Q+5570103CMX



PE55QC5987103CMX



PE55QC6215103CMX



PE55QC1301103CMX



PE55QC1035103CMX



PS77Q+1778101CMX



PE55QC7048103CMX




PS77Q+1779101CMX

Ibafacade, cephenize değer katar.

- Qualicoat ve GSB onaylı ürünler
- Dış mekanda üstün performans
- Qualicoat onaylı yüzey işlem ile 10 yıldan (PE55), 20 yıla (PS77) kadar dayanım
- Dekoratif mat yüzey
- Çevreye ve insana saygılı

Uygulama Bilgisi

Uygulama	Corona/Tribo	
Kürlenme	200°C 10 dakika (tavsiye edilen)	
	Metal Sıcaklığı (°C)	Süre (dakika)
	190	15-25
	200	8-18
	210	6-14
Film Kalınlığı	60-80 µm (tavsiye edilen)	

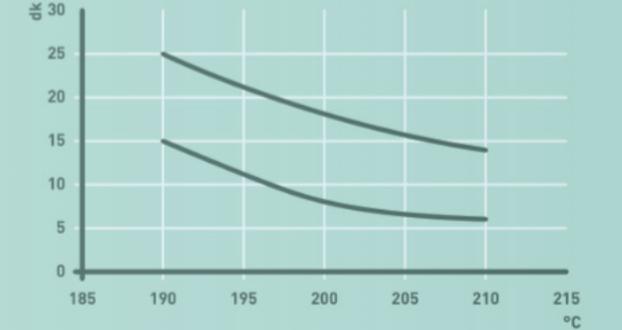


Ibafacade, adds value to your facade

- Qualicoat and GSB approved
- Excellent performance for exterior applications
- Very good durability from 10 years (PE55) up to 20 years (PS77) with Qualicoat approved surface treatment
- Decorative matt surface
- Respectful for the environment and human

Application Data

Application	Corona/Tribo	
Curing	200°C 10 minutes (recommended)	
	Metal Temperature (°C)	Time (minutes)
	190	15-25
	200	8-18
	210	6-14
Film Thickness	60-80 µm (recommended)	

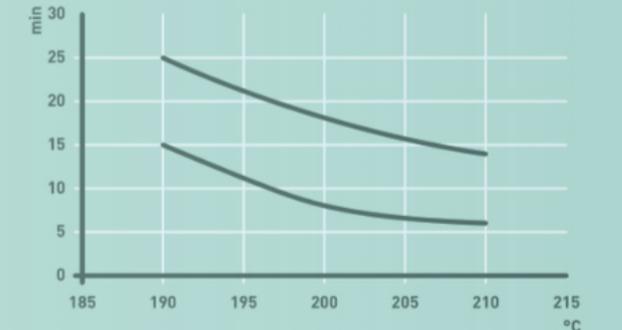

19

Colour

Collection