



Rev 2.4  
29.12.2015

# Aaronia EMC Bundles

Measurement Kits for straightforward pinpointing and measurement of interference sources

## References / examples of proof:

- ◆ EADS Deutschland GmbH, Unterschleissheim
- ◆ EnBW Kernkraftwerk GmbH, Neckarwestheim
- ◆ Siemens Healthcare, Marburg
- ◆ Universität Bern, Schweiz
- ◆ Universität Erlangen, Erlangen
- ◆ Freie Universität Berlin, Berlin
- ◆ Saarschmiede GmbH, Völklingen
- ◆ PEARL Agency GmbH, Buggingen
- ◆ Deutsches Elektronen-Synchrotron DESY, Hamburg

## Included in delivery:

- ◆ Spectran NF-5030 (incl. Option 005)
- ◆ Spectran HF-60100 V4 (incl. Option 002, 020)
- ◆ HyperLOG 60100 antenna
- ◆ EMC ProbeSet PBS2 incl. preamplifier (EMC-Bundle 1&3)
- ◆ BicoLOG 30100E (EMC Bundle 2)
- ◆ BicoLOG 20100E (EMC Bundle 3)
- ◆ 2x Transport cases
- ◆ Cable & accessories



Made in Germany



# Specifications

## SPECTRAN® NF-5030

- ◆ Frequency range: 1Hz to 1MHz (optionally up to **30MHz**)
- ◆ Measurement range up to **DIN/VDE 0848**
- ◆ **65 MSPS**
- ◆ Typ. level range E-Field: 0,1V/m to **5kV/m\*\***
- ◆ Typ. level range H-Field: 1pT to **500µT\*\***
- ◆ Typ. level range Analog in: **200nV** to 200mV\*\*
- ◆ Typ. accuracy: 3%\*\*
- ◆ Superfast FFT spectrum analysis
- ◆ High-performance DSP (Digital Signal Processor)
- ◆ 3D magnetic field measurement
- ◆ DIN/VDE 0848 Exposure limit calculation
- ◆ Simultaneous M-Display X, Y, Z axes
- ◆ True RMS signal strength measurement
- ◆ USB 2.0 Interface



## SPECTRAN® HF-60100 V4

- ◆ Up to **100x faster SampleTime** as Rev.3
- ◆ Up to **80dB higher sensitivity** as Rev.3
- ◆ **14Bit Dual-ADC**
- ◆ **DDC Hardware-Filter**
- ◆ **150 MIPS DSP** (CPU)
- ◆ Frequency range: 1MHz to **9,4GHz**
- ◆ Max measurement range: -155dBm (1Hz)
- ◆ Max measurement range PreAmps: **-170dBm** (1Hz)
- ◆ AbsMax Level: +20dBm
- ◆ AbsMax Level: **+40dBm** (Option)
- ◆ Lowest possible SampleTime: **1mS**
- ◆ Typ. accuracy: +/- 1dB\*\*
- ◆ USB 2.0 Interface
- ◆ incl. HyperLOG 60100 EMC logper antenna

## PBS2 Sniffer Set (only EMC-Bundle 1 and 3)

- ◆ Frequency range: **DC-6GHz**
- ◆ 5 Probes (50 Ohm SMB Connector):  
1x directional E-field probe, 4x magnetic field sniffer  
Pre-Amplifier noise (PBS2): 3.5dB typical
- ◆ PreAmplifier type/gain (PBS2):
- ◆ "linear" falloff. 1MHz: 40dB; 3GHz: 37.5dB; 6GHz: 35dB  
Dimensions of case (L/W/D): (300x190x70) mm
- ◆ Weight PBS2 (case incl. probes and pre-amplifier): 1500gr
- ◆ **Warranty: 10 years**

## BicoLOG 30100E (only EMC-Bundle 2)

- ◆ Design: Biconical Antenna
- ◆ Frequency range: **30MHz to 1GHz**
- ◆ Max. transmission power: 1W (30dBm or 0dbW)
- ◆ Nominal impedance: 50 Ohms
- ◆ Gain: **-31dBi** to 1dBi
- ◆ Antenna factor: **17-31dB/m**
- ◆ Calibration points: **194 (5MHz steps)**
- ◆ RF connection: SMA (female)
- ◆ Tripod socket: 1/4"
- ◆ Dimensions (L/W/D) : (540x225x225)mm
- ◆ Weight: 1150gr
- ◆ **Warranty: 10 years**

## BicoLOG 20100E (only EMC-Bundle 3)

- ◆ Design: Biconical Antenna
- ◆ Frequency range: **20MHz to 1GHz**
- ◆ Max. transmission power: 1W (30dBm or 0dbW)
- ◆ Nominal impedance: 50 Ohms
- ◆ Gain: **-38dBi** to 1dBi
- ◆ Antenna factor: **17-34dB/m**
- ◆ Calibration points: **196 (5MHz steps)**
- ◆ RF connection: SMA (female)
- ◆ Tripod socket: 1/4"
- ◆ Dimensions (L/W/D) : (540x225x225)mm
- ◆ Weight: 1150gr
- ◆ **Warranty: 10 years**


# Details

The MEASUREMENT KIT for the EMC-PRO.


Aaronia's EMC kit allows for straightforward pinpointing and measurement of interference sources in electronic component groups as well as execution and monitoring of generic EMC measurement.

It is perfect for locating interference sources which might have been found e.g. in an EN55011, EN55022 or EN50371 (Class A or Class B) survey.

The EMC-Bundle 1 contains our highend spectrum analyzer models SPECTRAN NF-5030 (incl. Option 005), SPECTRAN HF-60100 V4 (incl. Option 002, 020), the HyperLOG 60100 antenna, our ProbeSet PBS2 (only EMC-Bundle 1&3) incl. PreAmp, BicoLOG 30100E (EMC-Bundle 2) or BicoLOG 20100E (EMC-Bundle 3) and lots of accessories and cables.

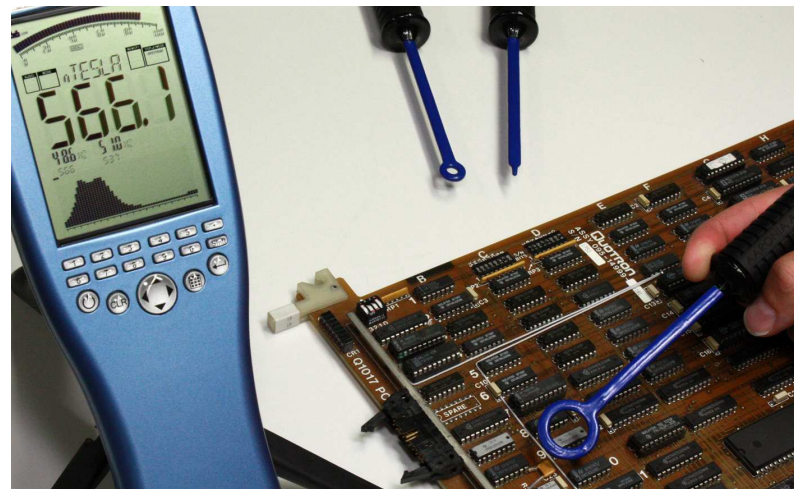

Magnetic field measurement on a group of components using the 60mm H-field probe

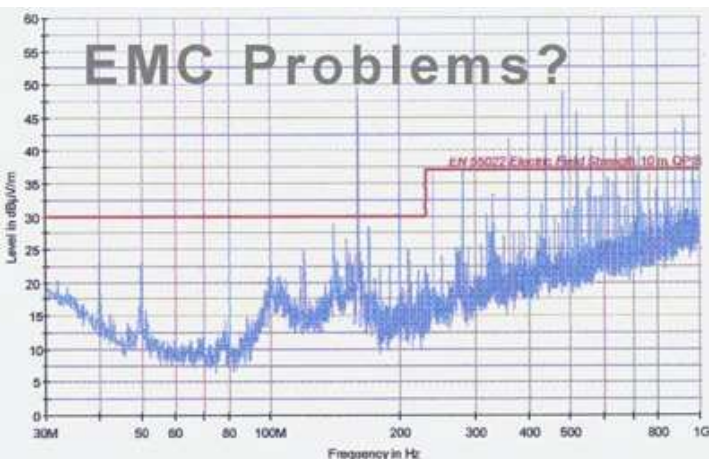

This EN 55022 B survey discloses a multitude of problematic sources of interference. With the help of our EMC bundle, these emitters can easily be pinpointed and eliminated.

Verification of official EMC limits:


For example, should an interference source exceed an official EMC limit by 10dB, our kit can easily verify if a certain countermeasure succeeds in making the circuitry conforming again. This is another situation where the EMC kit can eliminate the need for expensive and time-consuming measurements in EMC laboratories.

The kit is especially suitable for:

- ◆ Pinpointing interference sources
- ◆ Estimation of interference field strength
- ◆ Verification of shielding and filtering measures
- ◆ Identifying faulty components
- ◆ Detecting circuitry overly sensitive to interference

Aaronia probes are covered with an insulating layer, thus allowing safe measurement of oscillators or mains lines. The kit contains a high-performance pre-amplifier, allowing measurement of significantly weaker interference sources, boosting the sensitivity by up to 40dB.

After implementing appropriate changes in the circuit, their efficiency can easily and reliably be verified. That way, expensive and time-consuming re-assessments in an EMC laboratory can be skipped.

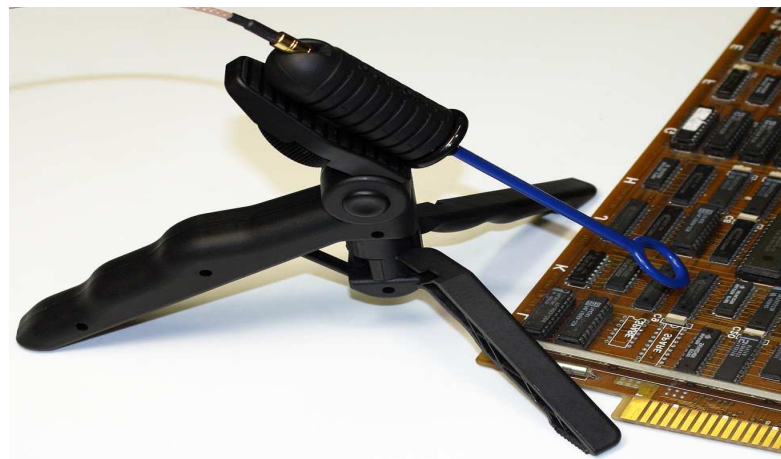

Pinpointing interference sources on a circuit board

# References

## Cross-Section of Aeronia Clients

### Government, Military, Aeronautic, Astronautic

- ◆ NATO, Belgium
- ◆ Department of Defense, USA
- ◆ Department of Defense, Australia
- ◆ Airbus, Germany
- ◆ Boeing, USA
- ◆ Bundeswehr, Germany
- ◆ NASA, USA
- ◆ Lockheed Martin, USA
- ◆ Lufthansa, Germany
- ◆ DLR, Germany
- ◆ Eurocontrol, Belgium
- ◆ EADS, Germany
- ◆ DEA, USA
- ◆ FBI, USA
- ◆ BKA, Germany
- ◆ Federal Police, Germany
- ◆ Ministry of Defense, Netherlands

### Research/Development, Science and Universities

- ◆ MIT - Physics Department, USA
- ◆ California State University, USA
- ◆ Indonesien Institute of Science, Indonesia
- ◆ Los Alamos National Laboratory, USA
- ◆ University of Bahrain, Bahrain
- ◆ University of Florida, USA
- ◆ University of Victoria, Canada
- ◆ University of Newcastle, United Kingdom
- ◆ University of Durham, United Kingdom
- ◆ University Strasbourg, France
- ◆ University of Sydney, Australia
- ◆ University of Athen, Greece
- ◆ University of Munich, Germany
- ◆ Technical University of Hamburg, Germany
- ◆ Max-Planck Institute for Radio Astronomy, Germany
- ◆ Max-Planck Institute for Quantum Optics, Germany
- ◆ Max-Planck-Institute for Nuclear Physics, Germany
- ◆ Max-Planck-Institute for Iron Research, Germany
- ◆ Research Centre Karlsruhe, Germany

### Industry

- ◆ APPLE, USA
- ◆ IBM, Switzerland
- ◆ Intel, Germany
- ◆ Shell Oil Company, USA
- ◆ ATI, USA
- ◆ Microsoft, USA
- ◆ Motorola, Brazil
- ◆ Audi, Germany
- ◆ BMW, Germany
- ◆ Daimler, Germany
- ◆ Volkswagen, Germany
- ◆ BASF, Germany
- ◆ Siemens AG, Germany
- ◆ Rohde & Schwarz, Germany
- ◆ Infineon, Austria
- ◆ Philips, Germany
- ◆ ThyssenKrupp, Germany
- ◆ EnBW, Germany
- ◆ RTL Television, Germany
- ◆ Pro Sieben – SAT 1, Germany
- ◆ Channel 6, United Kingdom
- ◆ CNN, USA
- ◆ Duracell, USA
- ◆ German Telekom, Germany
- ◆ Bank of Canada, Canada
- ◆ NBC News, USA
- ◆ Sony, Germany
- ◆ Anritsu, Germany
- ◆ Hewlett Packard, Germany
- ◆ Robert Bosch, Germany
- ◆ Mercedes Benz, Austria
- ◆ Osram, Germany
- ◆ DEKRA, Germany
- ◆ AMD, Germany
- ◆ Keysight, China
- ◆ Infineon Technologies, Germany
- ◆ Philips Semiconductors, Germany
- ◆ Hyundai Europe, Germany
- ◆ JDSU, Korea
- ◆ Wilkinson Sword, Germany
- ◆ IBM Deutschland, Germany
- ◆ Nokia-Siemens Networks, Germany

# Aaronia Distributors



## USA

**Aaronia USA**, 651 Amberton Crossing  
Suwanee, Georgia 30024 USA  
Phone: +1 678 714 2058  
Fax: +1 678 714 2092  
Email: [sales@aaroniausa.com](mailto:sales@aaroniausa.com)  
URL: [www.aaroniaUSA.com](http://www.aaroniaUSA.com)



## China

**Aaronia China**, 3BRM, RD FL Luhua Technology Bldg,  
Guangxia Road 7, Futian, 518049 Shenzhen, China  
Phone: +86 755 888 580 86  
Fax: +86 755 830 73 418  
Email: [mail@aaronia-china.com](mailto:mail@aaronia-china.com)  
URL: [www.aaronia-china.com](http://www.aaronia-china.com)



## Russia

**Testpribor**  
Fabriciusa St. 30 Moscow 125363 Russia  
Phone: +7 495 225 67 37  
Fax: +7 495 657 87 37  
Email: [testpribor@test-expert.ru](mailto:testpribor@test-expert.ru)  
URL: [www.test-expert.ru](http://www.test-expert.ru)



## India

**Aimil Ltd**, B-906, BSEL Tech Park, Opp. Vashi  
Rly Stn, 400705 Vashi, Navi Mumbai, India  
Phone: +91 22 3918 3554  
Fax: +91 22 3918 3562  
Email: [narayanedke@aimil.com](mailto:narayanedke@aimil.com)  
URL: [www.aimil.com](http://www.aimil.com)



## Greece

**VECTOR Technologies Ltd**  
40 Diogenus str., 15234 Halandri, Greece  
Phone: +30 210 685 8008  
Fax: +30 210 6858 8118  
Email: [info@vectortechnologies.gr](mailto:info@vectortechnologies.gr)  
URL: [www.vectortechnologies.gr](http://www.vectortechnologies.gr)




## Turkey

**EgeRate Elektronik Muh. ve Tic. Ltd. Sti** Perpa Ticaret  
Merkezi, A Blok Kat: 5 No: 141, Sisli / Istanbul, Turkey  
Phone: +90 212 220 3483  
Fax: +90 212 220 7635  
Email: [info@egerate.com](mailto:info@egerate.com)  
URL: [www.egerate-store.com](http://www.egerate-store.com)



## Taiwan

**E-Instrument Tech Ltd.**, No. 16, Lane 37  
Guanye E. Riad, Pingchen City,  
324587 Taoyuan County, Taiwan  
Phone: +886 3 4576 809  
Fax: +886 3 468 8611  
Email: [sales@e-channel.com.tw](mailto:sales@e-channel.com.tw)  
URL: [www.e-channel.com.tw](http://www.e-channel.com.tw)



## Argentina

**EKKON SA**, Paraná 350, Capital Federal,  
1017 Buenos Aires, Argentina  
Phone: + 54 114 123 009 1  
Fax: +54 114 372 324 4  
Email: [info@aaronia-argentina.com.ar](mailto:info@aaronia-argentina.com.ar)  
URL: [www.aaronia-argentina.com.ar](http://www.aaronia-argentina.com.ar)



## Israel

**Mono Tech Ltd.**  
2 Johanan Hasandlar St. 44641 Kfar-Sava, Israel  
Phone: +972 72 2500 290  
Fax: +972 9 7654 264  
Email: [kobi@aaronia.co.il](mailto:kobi@aaronia.co.il)  
URL: [www.aaronia.co.il](http://www.aaronia.co.il)



## Serbia

**Tagor Electronic doo**  
Tihomira Brankovica 21,  
18000 Nis, Serbia  
Phone: +381 18 575 545  
Fax: +381 18 217 125  
Email: [miodrag.stojilkovic@tagor.rs](mailto:miodrag.stojilkovic@tagor.rs)  
URL: [www.tagor-instrumenti.rs](http://www.tagor-instrumenti.rs)



## Iran

**International Rayan Nik**  
Unit 1, No. 25, Nahal Alley, Kanoon St., Kashani  
Ave, P.O.Box 14875-148, Tehran, Iran  
Phone: +98 21 4433 8882  
Fax: +98 21 4433 8883  
Email: [info@rayannik.com](mailto:info@rayannik.com)  
URL: [www.rayannik.com](http://www.rayannik.com)



Made in Germany

Aaronia AG, Gewerbegebiet Aaronia AG, DE-54597 Strickscheid, Germany  
Phone ++49(0)6556-93033, Fax ++49(0)6556-93034  
Email: [mail@aaronia.de](mailto:mail@aaronia.de) URL: [www.aaronia.com](http://www.aaronia.com)

**Spectran®** **HyperLOG®** **BicoLOG®** **OmniLOG®** **Aaronia-Shield®** **Aaronia X-Dream®** **MagnoShield®** **IsoLOG®**

are registered trademarks of Aaronia AG