

The MILMEGA 'AS' Series 2000 Dual Band Class A Solid State Microwave Amplifier Range

Model: AS0860A-200/50
200 Watt & 50 Watt 1.0 GHz - 6.0 GHz
Dual Band Broadband Amplifier
Two bands (0.8 to 2.7 and 2.0 to 6.0 GHz)




The AS0860 series of solid state power amplifiers follows the MILMEGA tradition for compact, upgradeable microwave power amplifier solutions with field proven reliability. Developed to cover the frequency band 0.8 - 6.0 GHz in two bands (0.8 GHz to 2.7 GHz and 2.0 GHz to 6.0 GHz).

Integral directional coupler fitted as standard.

Either RS232, USB and Ethernet or RS232 and GPIB remote controls can be fitted at no additional cost.

The unique 5 year parts and labour warranty on all MILMEGA amplifiers.

Colour led bar graph displays on the front panel giving an indication of incident and reflected power.

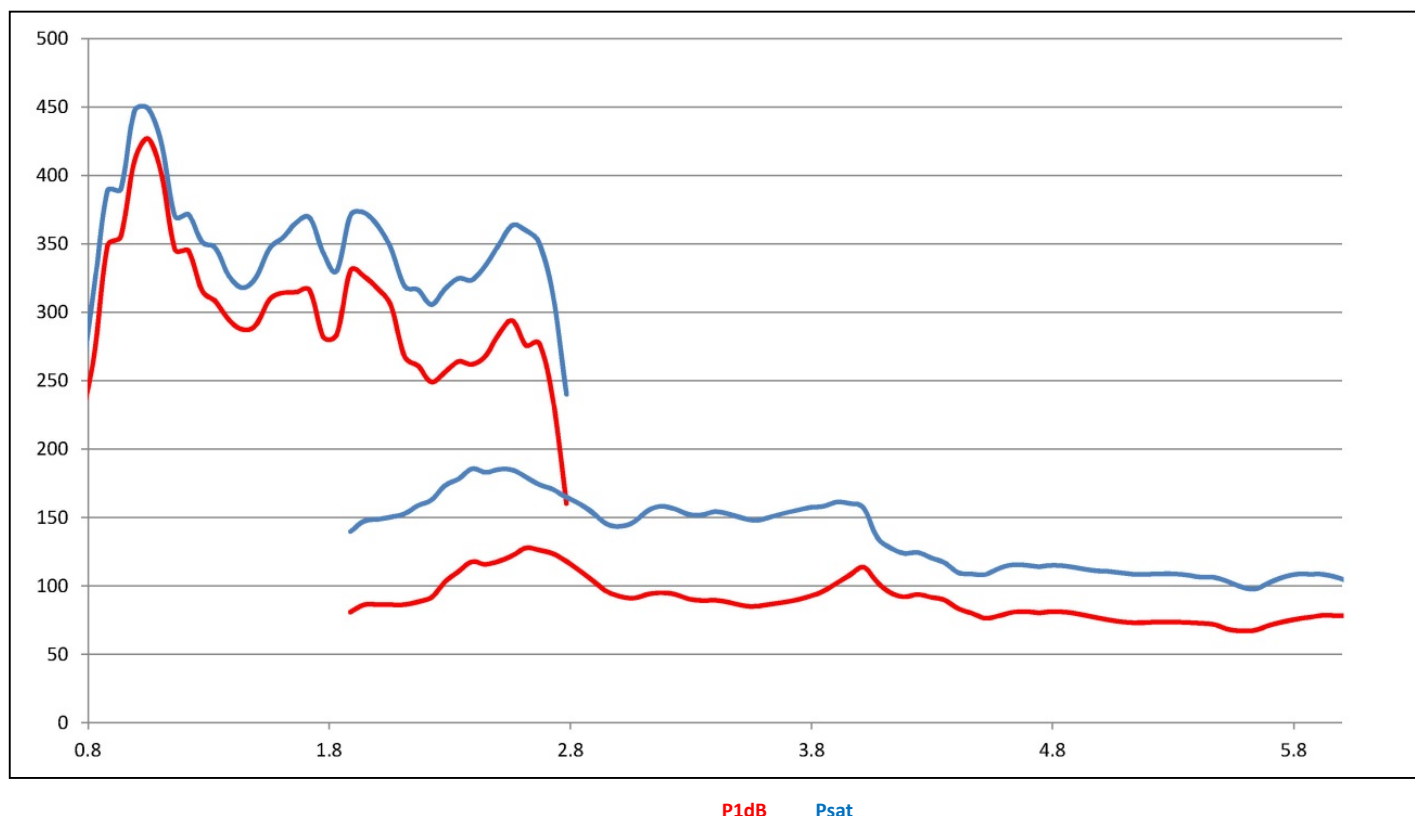

Amplifier Specification

Power Performance

	<i>Minimum Psat</i>	<i>Minimum P1dB</i>
Power 0.8-2.7 GHz	250 W	200 W
Power 2.0-6.0 GHz	75 W	45 W
	<i>Typical</i>	<i>Maximum</i>
Harmonics at P1dB	-20 dBc	
0.8-2.7 GHz Gain	49.6 dB	
2.0-6.0 GHz Gain	45.6 dB	
Gain variation with frequency	+/- 3 dB	
Gain variation with temperature	<0.06 dB/°C	
0.8-2.7 GHz Noise figure		6.0 dB
2.0-6.0 GHz Noise figure		8.0 dB
Input Power (no damage)		+15 dBm
Output VSWR tolerance	Infinite any phase	
Stability	Unconditional	
Output impedance	50 Ohm	
Output VSWR	2:1	
Input VSWR		2:1
Third order intercept point IP3	10 dB > P1dB	
Spurious	80 dBc	70 dBc
Safety Interlock	Via rear panel D-sub connector	
Supply Voltage – 3 Phase	Delta or Star	
Supply Voltage – Single phase	90 – 132 OR 180-240 VAC +/- 10% (4 mains leads)	
Supply Frequency	47 to 63 Hz	
Supply power	4.5 kVA	Theoretical maximum power.
RF Input	Type N female	
RF Output	Type N female	
Dimensions	19 inch, 12U amplifier mounted in 16U rack, 776mm Deep	
Weight	79 kgs	



Specifications subject to change without notice. MILMEGA is an ISO accredited Company. Products are designed and manufactured under strict quality and environmental requirements of ISO 9001.



RF/Microwave Amplifiers

MILMEGA Limited Park Road, Ryde, Isle of Wight PO33 2BE United Kingdom
 Tel. +44 (0) 1983 618004 Fax. +44 (0) 1983 811521 sales@milmega.co.uk www.milmega.co.uk